



12 OUTLET SURGE PROTECTOR


Premium quality, fireproof surge protection and reduces vampire / standby power consumption of PC and TV peripherals

KEY FEATURES

- 12 Outlets
- 288,000 Amps / 4320 Joules
- Ceramic Surge Protection
- LED Status Indication (Ground, Surge Status, Power)
- <40dB noise filtering
- Angled space saver plug / Standard NEMA straight plug
- Heavy duty cord

FIREPROOF SURGE PROTECTION

Traditional surge suppression products use standard MOV (Metal Oxide Varistor) components. TrickleStar products incorporate advanced surge protection technology. The MOVs are encased in a ceramic casing and are capable of suppressing more energy and dissipating heat faster than traditional MOVs. More importantly the ceramic casing is fireproof and is capable of preventing fire during abnormal surge conditions.

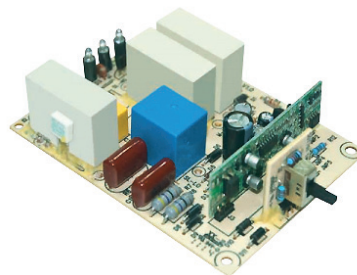

PRODUCT WARRANTY

Lifetime product warranty

\$20,000 connected equipment warranty

ELECTRICAL SPECIFICATIONS

FOR INDOOR USE

Voltage	120 VAC +/- 10% 60Hz
Power Rating	15A
Surge protection	288,000 Amps / 4320 Joules
Noise Filtering	<40dB
Standby Power Consumption	<1 Watt

PHYSICAL SPECIFICATIONS

Operating Temperature	32° to 113° F
Storage Temperature	14° to 140° F
Humidity	5 to 90% N/C
IP Rating	IP20

APPROVALS

Conformity to product standards for safety and EMC.
UL (US & Canada)
2002/95/EG (RoHs)
2002/96/EC (WEEE)
1999/5/EC (RTTE)

ORDERING INFORMATION

TAA3204	12 Outlet Surge Protector, 4320 Joules, 4 ft. cord, Polybag
TAA3205	12 Outlet Surge Protector, 4320 Joules, 8 ft. cord, Polybag
TAA3206	12 Outlet Surge Protector, 4320 Joules, 12 ft. cord, Polybag

For more information, please contact :
customer.service@tricklestar.com
Toll Free : 1-888-700-1098

Made in Taiwan



Copyright © TrickleStar. All rights reserved.

TrickleStar® is a registered trademarks of TrickleStar Ltd. All other trademarks are the property of their respective owners. The information in this document is subject to change without notice. TrickleStar assumes no responsibility for any errors that may appear in this document.

Rev 6 / 21 Jul 2016