

# 7 OUTLET ADVANCED POWERSTRIP + TIMER FOOTSWITCH

Premium quality, fireproof surge protection and reduces vampire / standby power consumption of PC and TV peripherals

#### **OVERVIEW**

Advanced PowerStrip (APS) provides premium quality surge protection and reduces the amount of standby + active power wasted by electronics.

The Advanced PowerStrip includes a low voltage RJ11 connector that allows a Timer Footswitch to be connected.

The Advanced PowerStrip includes current sensing on the 1st switched outlet. This allows the APS to support standard master/switched functionality when used with the Timer Footswitch. Simple, easy to install and provides automation to reduce wasteful standby and active power. Suitable for TV/home theatre applications.

### **KEY FEATURES**

- 7 Outlets
  - 2 Always On Outlets (1 outlet transformer spaced)
  - 5 Switched Outlets (1 outlet transformer spaced,
  - 1 outlet with current sensing)
- 15A resettable circuit breaker
- 72,000 Amps / 1080 Joules
- Ceramic Surge Protection
- 1 Low voltage optically isolated RJ11 input
- LED Status Indication (Ground, Surge Status, Switched)
- <40dB noice filtering</li>
- Angled space saver plug

#### FIREPROOF SURGE PROTECTION

Traditional surge suppression products use standard MOV (Metal Oxide Varistor) components. TrickleStar APS incorporates advanced surge protection technology. The MOVs are encased in a ceramic casing and are capable of suppressing more energy and dissipating heat faster than traditional MOVs. More importantly the ceramic casing is fireproof and is capable of preventing fire during abnormal surge conditions.

### TIMER FOOTSWITCH

- Works with Advanced PowerStrips
- · Allows manual control of switched outlets
- Countdown timer will automatically switch off switched outlets after 10 hours (adjustable 1-10 hours)
- Suitable for PC, office cubicle applications

### **PRODUCT WARRANTY**

Lifetime product warranty


\$20,000 connected equipment warranty




## 7 OUTLET ADVANCED POWERSTRIP

### + TIMER FOOTSWITCH

#### APPLICATION DIAGRAMS

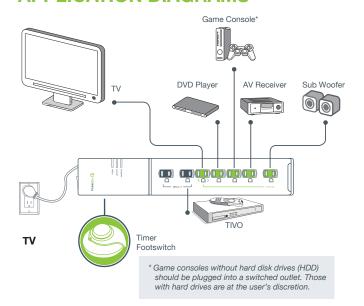

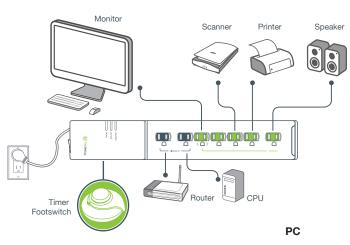

### **ELECTRICAL SPECIFICATIONS**

#### **APS**

FOR INDOOR USE

Voltage Power Rating

Surge protection

**Noise Filtering** 

**Power Consumption** 

RJ11

<1 Watt 3.3V + Optically isolated

15A

<40dB

120 VAC +/- 10% 60Hz

72,000 Amps / 1080 Joules

#### TIMER FOOTSWITCH

FOR INDOOR USE

Voltage 3.3V Cord Length 3 ft. Connector

RJ11 Switch Type Momentary

Countdown Timer Configurable: 1 - 10 Hours

#### PHYSICAL SPECIFICATIONS

**Operating Temperature** 32° to 113° F **Storage Temperature** 14° to 140° F Humidity 5 to 90% N/C **IP Rating** IP20

#### **APPROVALS**

Conformity to product standards for safety and EMC.

UL (US & Canada) 2002/95/EG (RoHs) 2002/96/EC (WEEE)

1999/5/EC (RTTE)

#### ORDERING INFORMATION

TAA3801 7 Outlet APS, 1080 Joules, 4 ft. cord, White,

Current Sensing, Timer Footswitch, Polybag

TAA3802 7 Outlet APS, 1080 Joules, 8 ft. cord, White,

Current Sensing, Timer Footswitch, Polybag

TAA3803 7 Outlet APS, 1080 Joules, 12 ft. cord, White,

Current Sensing, Timer Footswitch, Polybag

For more information, please contact: customer.service@tricklestar.com

Toll Free: 1-888-700-1098







Made in Taiwan

Copyright © TrickleStar. All rights reserved.

TrickleStar® is a registered trademarks of TrickleStar Ltd. All other trademarks are the property of their respective owners. The information in this document is subject to change without notice. TrickleStar assumes no responsibility for any errors that may appear in this document.

Rev 6 / 21 Jul 2016