

Wildcat/ Textron/ Tracker

Seat Installation

Step 1: Remove Stock Seats

*-Driver Side- Pull latch on back of seat and remove seat with bracket
-Passenger Side- Remove 2 Bolts at the bottom of the seat in front of the gas tank. Shake and pull the seat forward, it will come out.*

Step 2: Remove seats from bases .




Step 3: Bolt our included brackets to the stock Wildcat bases

- Place 2 washers in between the wildcat bracket and the included bracket. The tall side of the bracket belongs on the rear



Step 4: Mount new seats to the included brackets with the provided carriage bolts .

-Use the included spacer on the rear of the seat. We recommend bolting the rear of the seat before the front of the seat. Hand tighten all carriage bolts before tightening them.

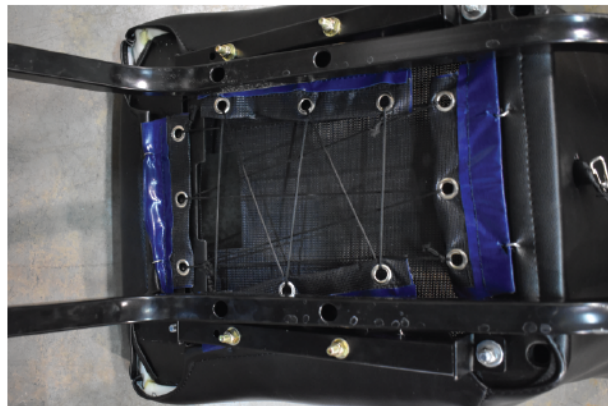

Step 5: Mount Seats back in your Artic Cat

Have any questions?

*Mon-Fri 9-4pm PST
(714) 321-5107*

*24/7
info@aces-racing.com*