

# Honda Talon 1000X/1000R

## Installation Guide

Fitment: 2 Seater or Front seats of the 4 seater

### PARTS INCLUDED


- 4 - Brackets
- 8 - 5/16" -18 Nyloc nuts
- 8 - Carriage Bolts
- 8 - 5/16" Flat Washers
- 8 - Aluminum Spacer

TO INSURE YOUR SAFETY AND THE SAFETY OF OTHERS AND AVOID PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND NOTES REGARDING THE USE AND CARE OF THIS PRODUCT

**STEP 1:** Remove the stock driver seat and place face-down on a clean surface. Start by removing the bottom cushion from the stock seat by pulling the release handle. Use a 12MM wrench or socket to remove the (4) nuts holding the stock seat frame to the slider mechanism.




Passenger Seat

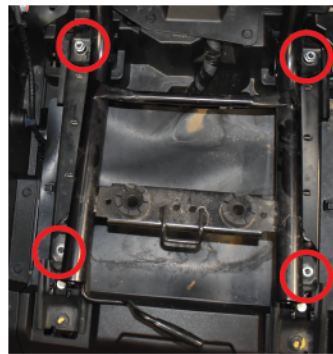


Driver Seat

**STEP 2:** Mount the included brackets to your new seats. Use the 5/16-18 carriage bolts, spacers, washers, and lock nut to mount the brackets to the seats. Do not fully tighten the brackets to the seats until they are adjusted and mounted on to the talon stock seat mounts.

#### Passenger Seat

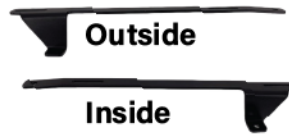


#### Driver Seat

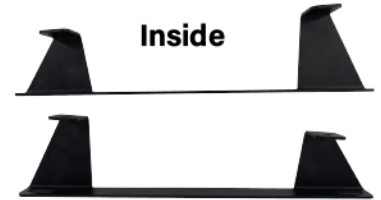

Outside



**STEP 3:** Place your seats into your Talon on the studs that were used to mount the stock seats. Once the seats are on the 4 studs, you can tighten the front of the brackets to the seats. You will now have to remove the seats to tighten the back carriage bolts. Once this is finished you can mount the seat to studs using the stock bolt that was removed in step 1. For the passenger seat you have to cut the plastic on the inside of the passenger seat to be able to access a wrench to tighten.

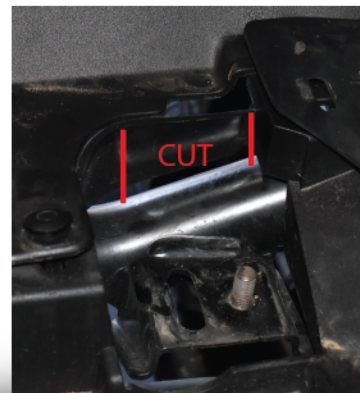

**APEX**  
suspension seats

**DAYTONA**  
carbon edition  
suspension seats