

Assembly Instruction Sheet #IS-1205P16

For Style 1205P16

Tools Required: Flathead screwdriver, Philips screwdriver, pliers, wire cutter, wire stripper, electrical tape, safety glasses.

Light Source: (8) G9 LED Bulb Max 2W (Not Included).


Estimated Assembly Time: 10-20 minutes.

Preparation: Identify and inspect all parts before beginning installation. Check the package content list and diagrams to ensure all parts are present. Do not attempt to assemble, install, or operate the fixture if any parts are missing or damaged. Contact customer service for replacement parts

Warnings and Cautions

- Turn off electricity at the circuit breaker or main fuse box before installation. Consult a licensed electrician if you are in doubt.
- These instructions are provided for your safety; it is very important you read them completely before installing the fixture.
- It is strongly recommended that a licensed, professional electrician perform the installation.
- Disconnect the fixture from the power source before replacing bulbs.
- Make sure bulbs are given sufficient time to cool before removal.

Package Contents

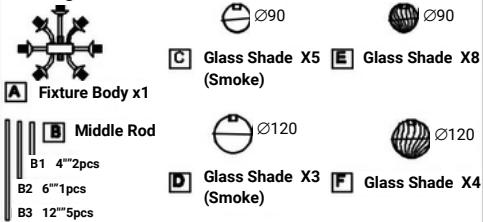


Hardware Contents

Part	Description	Quantity
AA	Decorative Caps	2pcs
BB	Electrical Wire Nuts	2pcs
CC	Outlet Box Screw	2pcs
DD	Mounting Screw	2pcs
EE	Mounting bracket	1pcs




STEP 1 – Install Rods to Fixture Body

A. Thread the power cord to the Middle Rods (B). Fix the Middle Rods (B) with the Fixture Body (A), then use the same process to connect the other pieces of Rods. Finally, fix the Canopy with the Rods.

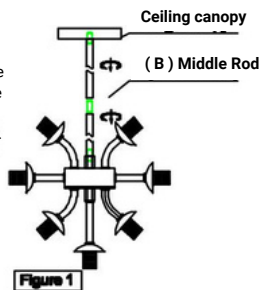


STEP 2 – Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket

A. Line up a set of holes on the Mounting bracket (EE) and holes on the Ceiling canopy. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (DD). Hand tighten until snug.




STEP 3 – Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (CC). Tighten until snug.

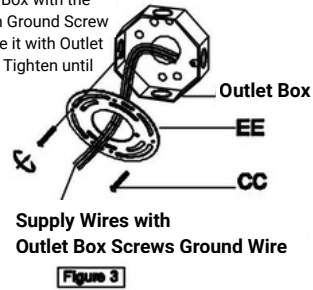


STEP 4 – Fit Ceiling Canopy to Mounting bracket Assembly

A. Fit the Ceiling canopy to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The ceiling canopy should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Decorative Caps (AA) and ceiling canopy and proceed to Step 5.

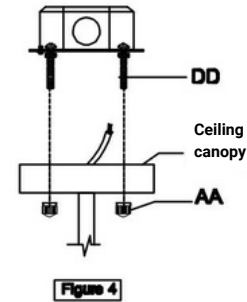


STEP 6 - Install Ceiling Canopy to Ceiling

A. Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (A) over the outlet box. Align the holes in the ceiling canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.

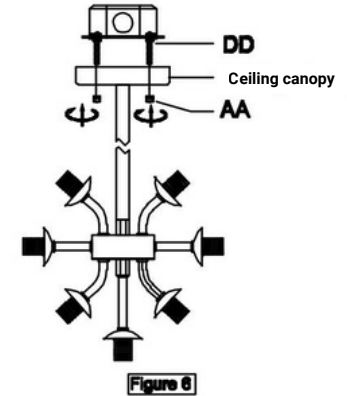


STEP 5 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

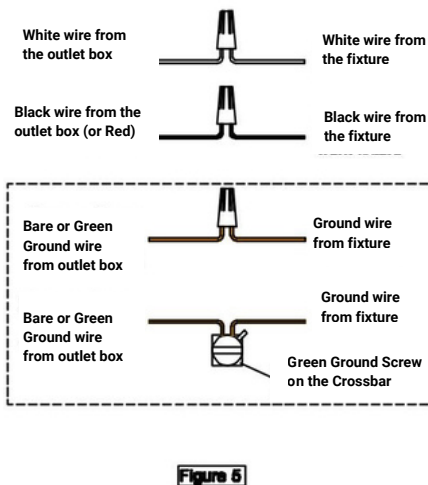

STEP 7 - Install Glass Shade, Bulbs

- Install bulbs (Not included) into sockets and push snug into place.
- Put the Glass Shade to the Fixture Body (A). The smoke glass ball is installed on the lamp holder.

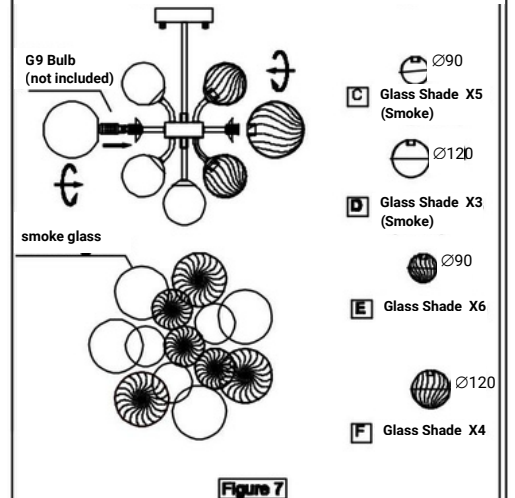

Assembly Instruction Sheet #IS-1205P25

For Style 1205P25

Tools Required: Flathead screwdriver, Philips screwdriver, pliers, wire cutter, wire stripper, electrical tape, safety glasses.

Light Source: (15) G9 LED Bulb Max 2W (Not included).


Estimated Assembly Time: 10-20 minutes.

Preparation: Identify and inspect all parts before beginning installation. Check the package content list and diagrams to ensure all parts are present. Do not attempt to assemble, install, or operate the fixture if any parts are missing or damaged. Contact customer service for replacement parts

Warnings and Cautions

- Turn off electricity at the circuit breaker or main fuse box before installation. Consult a licensed electrician if you are in doubt.
- These instructions are provided for your safety; it is very important you read them completely before installing the fixture.
- It is strongly recommended that a licensed, professional electrician perform the installation.
- Disconnect the fixture from the power source before replacing bulbs.
- Make sure bulbs are given sufficient time to cool before removal.

Package Contents

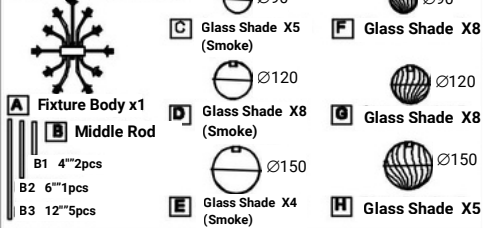


Hardware Contents

Part	Description	Quantity
AA	Decorative Caps	2pcs
BB	Electrical Wire Nuts	2pcs
CC	Outlet Box Screw	2pcs
DD	Mounting Screw	2pcs
EE	Mounting bracket	1pcs



STEP 1 – Install Rods to Fixture Body

A. Thread the power cord to the Middle Rods (B). Fix the Middle Rods (B) with the Fixture Body (A), then use the same process to connect the other pieces of Rods. Finally, fix the Canopy with the Rods.



STEP 2 – Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket

A. Line up a set of holes on the Mounting bracket (EE) and holes on the Ceiling canopy. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (DD). Hand tighten until snug.




Figure 2

STEP 3 – Attach Mounting bracket to Outlet Box

A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (CC). Tighten until snug.




Figure 3

STEP 4 – Fit Ceiling Canopy to Mounting bracket Assembly

A. Fit the Ceiling canopy to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The ceiling canopy should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Decorative Caps (AA) and ceiling canopy and proceed to Step 5.




Figure 4

STEP 5 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

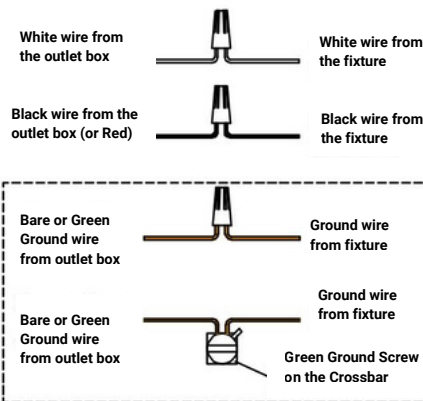


Figure 5

STEP 6 - Install Ceiling Canopy to Ceiling

A. Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (A) over the outlet box. Align the holes in the ceiling canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.

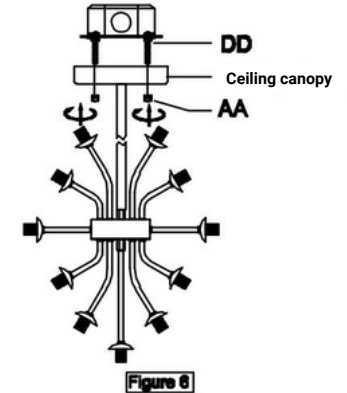


Figure 6

STEP 7 - Install Glass Shade, Bulbs

- Install bulbs (Not included) into sockets and push snug into place.
- Put the Glass Shade to the Fixture Body (A). The smoke glass ball is installed on the lamp holder.

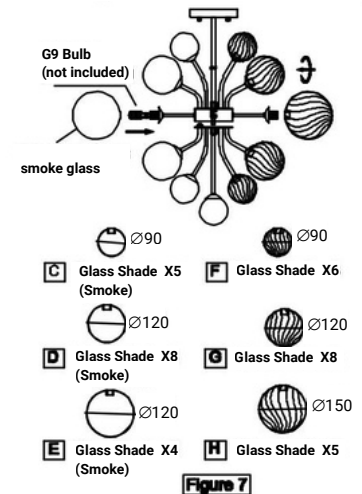


Figure 7

Assembly Instruction Sheet #IS-1205P36

For Style 1205P36

Tools Required: Flathead screwdriver, Philips screwdriver, pliers, wire cutter, wire stripper, electrical tape, safety glasses.

Light Source: (27) G9 LED Bulb Max 2W (Not Included).


Estimated Assembly Time: 10-20 minutes.

Preparation: Identify and inspect all parts before beginning installation. Check the package content list and diagrams to ensure all parts are present. Do not attempt to assemble, install, or operate the fixture if any parts are missing or damaged. Contact customer service for replacement parts

Warnings and Cautions

- Turn off electricity at the circuit breaker or main fuse box before installation. Consult a licensed electrician if you are in doubt.
- These instructions are provided for your safety; it is very important you read them completely before installing the fixture.
- It is strongly recommended that a licensed, professional electrician perform the installation.
- Disconnect the fixture from the power source before replacing bulbs.
- Make sure bulbs are given sufficient time to cool before removal.

Package Contents

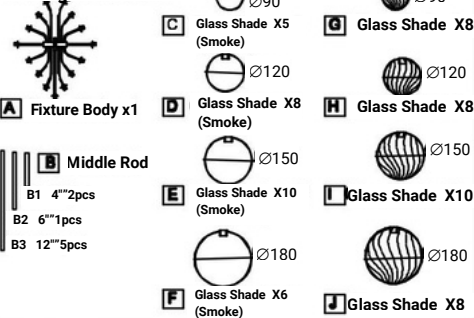


Hardware Contents

Part	Description	Quantity
AA	Decorative Caps	2pcs
BB	Electrical Wire Nuts	2pcs
CC	Outlet Box Screw	2pcs
DD	Mounting Screw	2pcs
EE	Mounting bracket	1pcs




STEP 1 - Install Rods to Fixture Body

A. Thread the power cord to the Middle Rods (B). Fix the Middle Rods (B) with the Fixture Body (A), then use the same process to connect the other pieces of Rods. Finally, fix the Canopy with the Rods.




STEP 2 - Attach Mounting Screws, Lock Washers and Hex Nuts to Mounting bracket

A. Line up a set of holes on the Mounting bracket (EE) and holes on the Ceiling canopy. Thread Mounting Screws (DD) into the holes on the Mounting bracket (EE). Pass Lock Washers and thread Hex Nuts onto the Mounting Screws (DD). Hand tighten until snug.



STEP 3 - Attach Mounting bracket to Outlet Box


A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure it with Outlet Box Screws (CC). Tighten until snug.



Supply Wires with Outlet Box Screws Ground Wire


STEP 4 - Fit Ceiling Canopy to Mounting bracket Assembly

A. Fit the Ceiling canopy to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The ceiling canopy should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the ceiling canopy is secure, remove the Decorative Caps (AA) and ceiling canopy and proceed to Step 5.





STEP 6 - Install Ceiling Canopy to Ceiling

A. Carefully tuck all wires into the outlet box and position the ceiling canopy of the Fixture Body (A) over the outlet box. Align the holes in the ceiling canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.

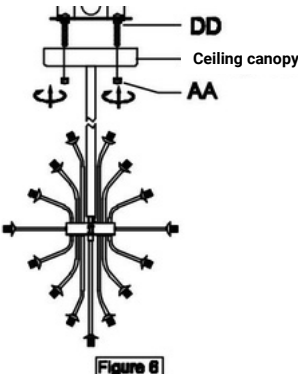

STEP 5 - Wire Connections

A. Use standard wire connectors to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

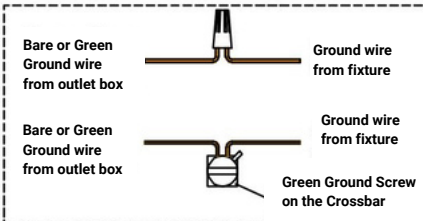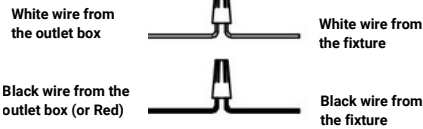

STEP 7 - Install Glass Shade, Bulbs

- Install bulbs (Not included) into sockets and push snug into place.
- Put the Glass Shade to the Fixture Body (A). The smoke glass ball is installed on the lamp holder.

