

Assembly Instruction Sheet #IS-1586W5

For Style 1586W5 (Brass and Black Finish)

Tools Required: Flathead screwdriver, Philips screwdriver, pliers, wire cutter, wire stripper, electrical tape, safety glasses.


Light Source: 120V LED 10W DIMMABLE (3000K).

Preparation: Identify and inspect all parts before beginning installation. Check the package content list and diagrams to ensure all parts are present. Do not attempt to assemble, install, or operate the fixture if any parts are missing or damaged. Contact customer service for replacement parts

Warnings and Cautions

- Turn off electricity at the circuit breaker or main fuse box before installation. Consult a licensed electrician if you are in doubt.
- These instructions are provided for your safety; it is very important you read them completely before installing the fixture.
- It is strongly recommended that a licensed, professional electrician perform the installation.
- Disconnect the fixture from the power source before replacing bulbs.
- Make sure bulbs are given sufficient time to cool before removal.

Package Contents

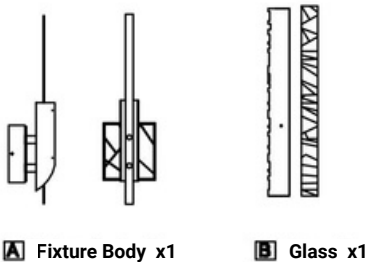

Hardware Contents

Part	Description	Quantity
BB	Wire Nut	2 pcs
CC	Screw	2 pcs



STEP 1 - Put the glass in the hardware box and screw it in place.


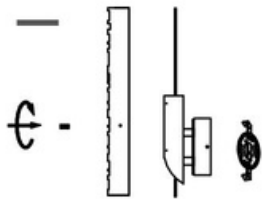


Figure 1

STEP 2 - Attach Mounting Bracket to Outlet Box

- Pass the supply wires through the Mounting bracket (EE).
- Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you.
- Secure it with Outlet Box Screws (CC).
- Tighten until snug.

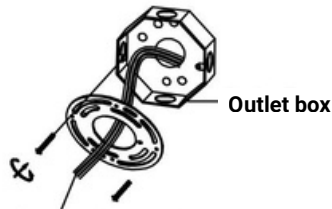

Supply wires with outlet box screws ground wires

Figure 2

STEP 3 - Wire Connections

- Use standard wire connectors (Wire nut) to make all wire connections.
- Twist connectors until wires are tightly joined together.
- Wrap each connection with approved electrical tape.
- Carefully stuff all the connected wires into the Outlet Box.

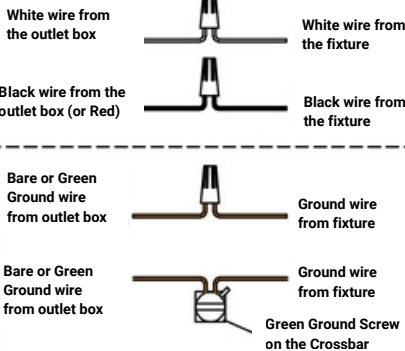


Figure 3

STEP 4




Figure 4