



SL40 R5 XS2000 230V 2000W CFP

The SL40 R5 Xenon is designed with a IP56 rating and is approved for temperatures down to -40°C and up to +50°C. Seawater resistant aluminum housing and motor house, coupled with excellent heat management, ensures a searchlight with long run-time and long lifetime. COMPLETE SEARCHLIGHT, WITH MAIN PANEL, POWER SUPPLY AND FOCUS.

Item Number	500201540
GTIN	4036538577796
Stock status	M



Technical specifications

Certificates

Marine Approved	True
-----------------	------

Technical Data

Minimum ambient temperature (°C)	-40
Maximum ambient temperature (°C)	50
IP classification	56
Operation mode	Remote R5

Light Technical Data

Light source	Xenon
Number of lamps	1
Candela Output (cd)	87000000
Light source included	True

Electrical Data

Minimum Voltage -10% (VAC)	230
Maximum voltage +10% (VAC)	230
Minimum frequency -5% (Hz)	50
Maximum frequency +5% (Hz)	60

Optic

Output angle (°)	2
Focus	Electronic
Material of diffuser	Tempered glass
Colour of reflector	Silver
Material of reflector	Glass

Housing

Main body material	Aluminium
Body colour	WH - White
Main body colour name	White

Dimensions

Width (mm)	678
Height (mm)	1040
Diameter (mm)	525
Net weight (kg)	159.16


Special

Operation mode	Remote R5
PAN Sector	360
TILT Sector	55


Logistic Data

Item gross weight (kg)	173
------------------------	-----

Illustrations

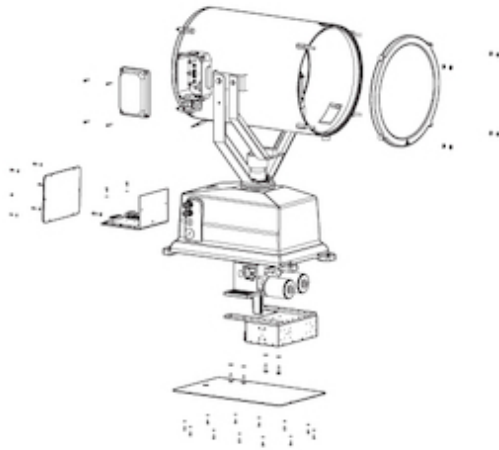

Explosion Drawing for SL40 R5 Xenon Searchlight

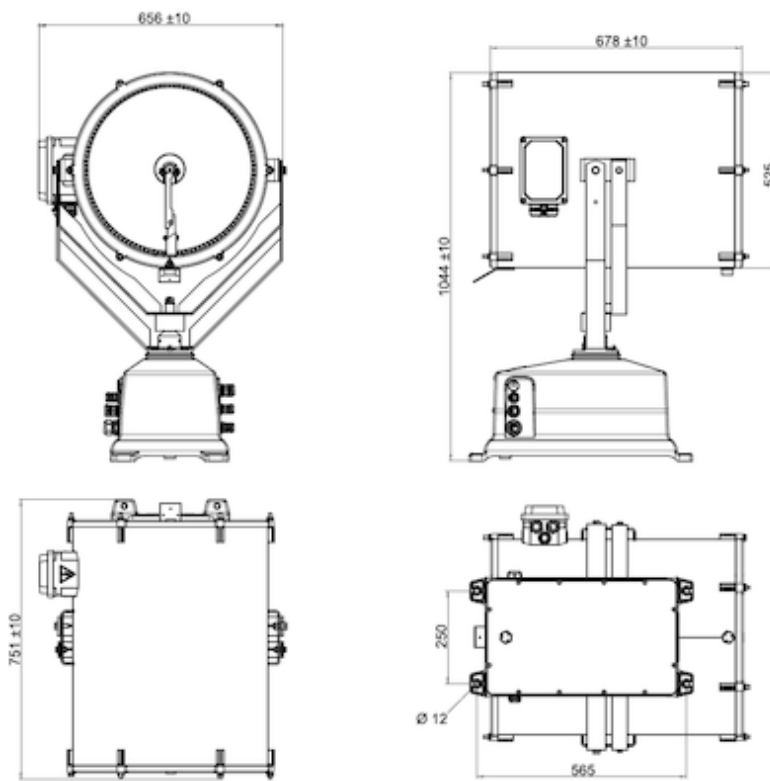

Measurement Drawing for SL40 R3 Xenon Searchlight for 2000Watt