


Dell EMC PowerEdge T140

Technical Guide

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Product overview

Topics:

- [Introduction](#)
- [New technologies](#)

Introduction

The Dell EMC PowerEdge T140 is the practical entry-level 1-socket mini-tower server that is easy to use and secure.

New technologies

The PowerEdge T140 is the practical entry-level 1-socket mini-tower server for growing businesses and organizations. The PowerEdge T140 is easy to use and helps keep your data safe to grow your business. Now with faster 6 core Intel® Xeon® processors, it helps run applications faster and support for full-feature remote management (iDRAC9), the T140 is also excellent for Remote Offices / Branch Offices (ROBO) of large institutions. Enhanced by quiet operation and compact mini-tower dimensions, the PowerEdge T140 1-socket tower server delivers the performance, efficiency and expandability needed for success.

The T140 is versatile enough to address many customer segments and workloads. Target workloads include:

- Small Businesses and organizations:
 - File and print, mail and messaging, point of sale, web serving, and other collaboration and productivity applications.
- ROBO: Applications and workloads specific to the particular industry, e.g. Retail, Healthcare, Finance, Education, etc.

Table 1. Detailed information of new technologies

New technologies	Description
Intel® C246 series chipset	Please refer to the chipset section for details.
Intel® Xeon® processor E-2100 and E-2200 Product Family	The Intel® processor that works with Intel® C246 series chipset. The Xeon® E-2100 and E-2200 processors have increased core count and embedded PCIe lanes that will improve the IO performance and a lot more features.
Next Generation SW RAID, PERC S140	The new 14G 1-socket servers support the latest S140 software RAID along with H330 and H730P controller cards with improved functionality and faster performance. New SW RAID supports RAID 0, 1, 5 and 10.
iDRAC 9	The new embedded system management solution for 14G server features hardware and firmware inventory and alerting, in depth memory alerting, faster performance, dedicated gigabit port, email alerts, electronic licensing, editable user work notes log, and more. Dedicated iDRAC Direct microUSB port improves at-the-box management.

Product features

Topics:

- [Product comparison](#)
- [Specifications](#)

Product comparison

The following table shows the comparison between the PowerEdge T130 and the PowerEdge T140:

Feature	PowerEdge T130	PowerEdge T140
Processor	<ul style="list-style-type: none"> • Intel® Xeon® processor E3-1200 v6 product family • Intel® Core™ i3 • Intel® Pentium® • Intel® Celeron® 	<ul style="list-style-type: none"> • Intel® Xeon® processor E-2100 and E-2200 product family • Intel® Core™ i3 • Intel® Pentium® • Intel® Celeron®
Front Side Bus	<ul style="list-style-type: none"> • DMI 3.0 	<ul style="list-style-type: none"> • DMI 3.0
Number of processors	<ul style="list-style-type: none"> • 1 	<ul style="list-style-type: none"> • 1
Number of cores	<ul style="list-style-type: none"> • Up to 4 cores 	<ul style="list-style-type: none"> • Up to 6 cores
L2/L3 cache	<ul style="list-style-type: none"> • 2.0 MB per core 4 MB or 8 MB 	<ul style="list-style-type: none"> • 2.0 MB per core 8 MB or 12 MB
Chipset	<ul style="list-style-type: none"> • Intel® C236 chipset 	<ul style="list-style-type: none"> • Intel® C246 chipset
DIMMs	<ul style="list-style-type: none"> • 4 UDIMMS DDR4 Up to 2400MT/s 	<ul style="list-style-type: none"> • 4 UDIMMS DDR4 Up to 2666MT/s
Min/Max RAM	<ul style="list-style-type: none"> • 4GB/64GB 	<ul style="list-style-type: none"> • 8GB/64GB
Hard drive bays	<ul style="list-style-type: none"> • 4x 3.5" cabled 	<ul style="list-style-type: none"> • 4x 3.5" cabled
Hard drive types	<ul style="list-style-type: none"> • 3.5" Enterprise SATA 7.2K HDDs • 3.5" Near Line SAS 7.2K HDDs • 3.5" 7.2K SATA Entry Drives 	<ul style="list-style-type: none"> • 3.5" Enterprise SATA 7.2K HDDs • 3.5" Near Line SAS 7.2K HDDs • 3.5" 7.2K SATA Entry Drives
External drive bay(s)	<ul style="list-style-type: none"> • 1x slim ODD 9.5mm 	<ul style="list-style-type: none"> • 1x slim ODD 9.5mm
Embedded hard drive controller	<ul style="list-style-type: none"> • Chipset based SATA PERC S130 (Embedded SW RAID) 	<ul style="list-style-type: none"> • Chipset based SATA PERC S140 (Embedded SW RAID)
Optional storage controller	<ul style="list-style-type: none"> • Non-RAID: 12GB SAS HBA • RAID: PERC H330, PERC H730, PERC H830 	<ul style="list-style-type: none"> • Non-RAID: 12GB SAS HBA, PERC HBA330 • RAID: PERC H330, PERC H730P
Boot Optimized Storage Subsystem (BOSS)	Not Supported	<ul style="list-style-type: none"> • 2x M.2 240GB (RAID 1 or No RAID) 1x M.2 240GB (No RAID only)
Server management	<ul style="list-style-type: none"> • Dell Open Manage featuring Dell Management Console 	<ul style="list-style-type: none"> • Dell Open Manage featuring Dell Management Console

Feature	PowerEdge T130	PowerEdge T140
	<ul style="list-style-type: none"> • Lifecycle Controller 3.0 • iDRAC8 Enterprise 	<ul style="list-style-type: none"> • Lifecycle Controller 3.0 • iDRAC9 Enterprise
I/O slots	<ul style="list-style-type: none"> • 1x8 Gen3 (x16 connector) FH/HL • 1x4 Gen3 (x8 connector) FH/HL • 1x4 Gen3 (x8 connector) FH/HL • 1x1 Gen3 (x1 connector) FHHL 	<ul style="list-style-type: none"> • 1x8 Gen3 (x16 connector) FH/HL • 1x8 Gen3 (x8 connector) FH/HL • 1x4 Gen3 (x8 connector) FH/HL • 1x1 Gen3 (x1 connector) FH/HL
NIC/LOM	<ul style="list-style-type: none"> • 2 X 1GbE LOM 	<ul style="list-style-type: none"> • 2 X 1GbE LOM
USB	<ul style="list-style-type: none"> • Rear: 2 USB 3.0, 4 USB 2.0 • Front: 1 USB 2.0, 1 USB 3.0 • Internal: 1 USB 3.0 	<ul style="list-style-type: none"> • Rear: 2 USB 3.0, 4 USB 2.0 • Front: 1 USB 3.0, 1 Micro USB 2.0 (Dedicated iDRAC direct) • Internal: 1 USB 3.0
Power supplies	<ul style="list-style-type: none"> • Non-Redundant D5 290W Bronze EPA (Auto sensing) 	<ul style="list-style-type: none"> • Non-Redundant D5 365W Gold EPA (Auto sensing)
Fans	<ul style="list-style-type: none"> • Non-redundant, non-hot swappable 	<ul style="list-style-type: none"> • Non-redundant, non-hot swappable
Form factor	<ul style="list-style-type: none"> • Mini Tower 	<ul style="list-style-type: none"> • Mini Tower
Dimension (HxWxD)	<ul style="list-style-type: none"> • Height 14.17 in / 36.0 cm • Width 6.89 in / 17.5 cm • Depth 17.9 in / 45.4 cm 	<ul style="list-style-type: none"> • Height 14.17 in / 36.0 cm • Width 6.89 in / 17.5 cm • Depth 17.9 in / 45.4 cm
Weight	<ul style="list-style-type: none"> • Max 24.9lbs or (11.3 Kgs) 	<ul style="list-style-type: none"> • Max 26.10lbs or (11.84 Kgs)

Specifications

The following table shows the specifications for the PowerEdge T140:

Table 2. Product specifications

Feature	Specifications
Form Factor	<ul style="list-style-type: none"> • Mini Tower
Processors	<ul style="list-style-type: none"> • Intel® Xeon® processor E-2100 and E-2200 product family • Intel® Core™ i3 • Intel® Pentium® • Intel® Celeron
Processor sockets	<ul style="list-style-type: none"> • 1
Front Side Bus or HyperTransport	<ul style="list-style-type: none"> • DMI
Cache	<ul style="list-style-type: none"> • 2.0 MB per core • 8 MB or 12 MB
Chipset	<ul style="list-style-type: none"> • Intel® C246 Chipset
Memory	<ul style="list-style-type: none"> • Up to 64GB (4 DIMM Slots) • 8GB/16GB 2666MT/s Unbuffered with ECC only • Min/Max RAM: 8GB/64GB

Table 2. Product specifications (continued)

Feature	Specifications
I/O Slots	<ul style="list-style-type: none"> ● 4 Gen3 PCIe slots: ● One x8 slots (one with x16 connectors) ● Two x4 slot (with x8 connector) ● One x1 slot
RAID Controller	<ul style="list-style-type: none"> ● Internal controllers: PERC S140, PERC H330, PERC H730P ● External HBAs (non-RAID): 12GB SAS HBA
Drive bays	<ul style="list-style-type: none"> ● Up to four 3.5" cabled SAS or SATA drives
Hard drives	<ul style="list-style-type: none"> ● 3.5" Enterprise SATA 7.2K HDDs ● 3.5" Near Line SAS 7.2K HDDs ● 3.5" 7.2K SATA Client Drives ● Capacity: 1 TB ,2 TB ,4 TB (4TB requires PERC H330 or H730P)
Embedded LOM/NIC	<ul style="list-style-type: none"> ● Integrated BROADCOM BCM5720 Gigabit Ethernet Controller
Communications	<ul style="list-style-type: none"> ● Optional add-in NICs: <ul style="list-style-type: none"> ○ 1GB Intel (Dual) Powerville Troi-Stony Dual port 1Gb Base-T adapter - FH ○ 1GB Intel (Quad) Powerville Lore-Stony Quad port 1Gb Base-T adapter - FH ○ 1GB Broadcom (Dual) 5720 Bashir Dual port 1Gb Base-T adapter - FH ○ 1GB Broadcom (Quad) 5719 Cardassia Quad port 1Gb Base-T adapter - FH
Power supply	<ul style="list-style-type: none"> ● Cabled 365W Gold (100–240 V AC)
Availability	<ul style="list-style-type: none"> ● ECC Memory, ADD-in RAID, TPM/CTPM
Video	<ul style="list-style-type: none"> ● Integrated Matrox G200 with iDRAC9
Remote Management	<ul style="list-style-type: none"> ● Base Management Console,iDRAC Express and iDRAC Enterprise (Upsell option)
Systems Management	<ul style="list-style-type: none"> ● Dell Open Manage featuring Dell Management Console ● Lifecycle Controller 3.0 ● iDRAC9 Enterprise
Featured Database Applications	<ul style="list-style-type: none"> ● Microsoft® SQL Server® solutions

Chassis views and features

Topics:

- [Front view of the system](#)
- [Rear view of the system](#)
- [Inside the system](#)
- [Locating the Service Tag of your system](#)

Front view of the system



Figure 1. Front view of the system

1. Power button
2. System health and ID indicator
3. USB 3.0 port
4. iDRAC direct micro USB port
5. Optical drive (optional)

For more information about the ports, see the [Ports and connectors specifications](#) section.

Rear view of the system

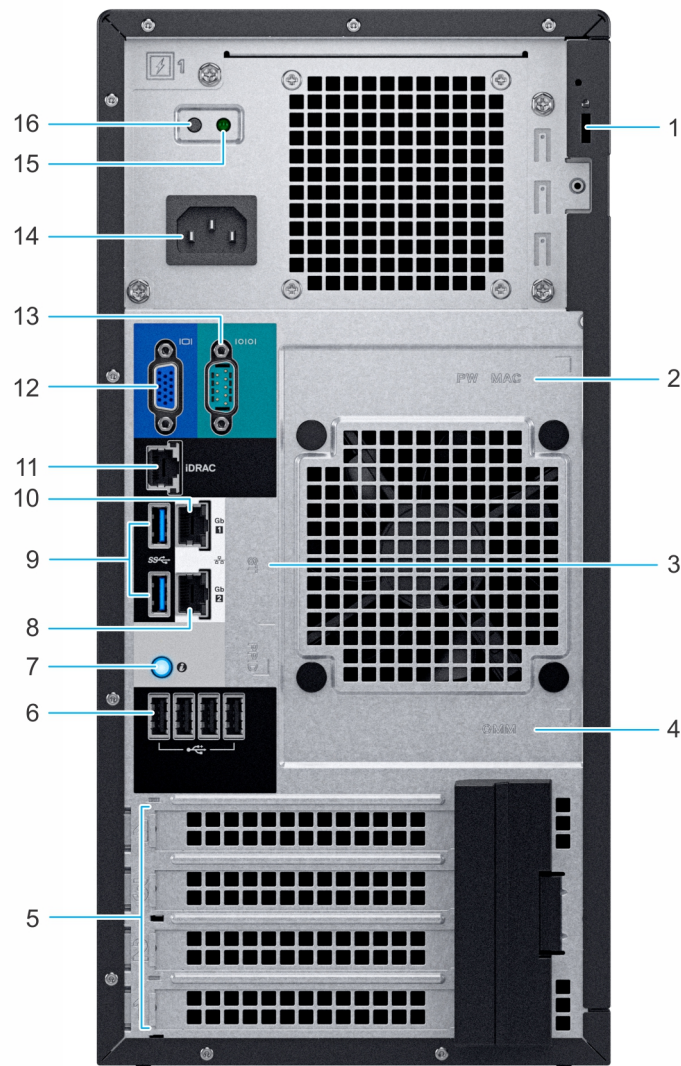


Figure 2. Rear view of the system

- | | |
|---|--|
| 1. Security Cable Lock | 2. iDRAC MAC address and iDRAC secure password label |
| 3. Service Tag, Express Service Code, QRL label | 4. OpenManage Mobile (OMM) label |
| 5. PCIe expansion card slots (4) | 6. USB 2.0 port (4) |
| 7. System identification button | 8. NIC port (Gb 2) |
| 9. USB 3.0 ports (2) | 10. NIC port (Gb 1) |
| 11. iDRAC dedicated NIC port | 12. VGA port |
| 13. Serial port | 14. Power supply unit |
| 15. PSU Built-in Self Test (BIST) LED | 16. PSU Built-in Self Test (BIST) Button |

NOTE: For more information about the ports and connectors, see the [Ports and connectors specifications](#) section.

Inside the system

CAUTION: Many repairs may only be done by a certified service technician. You should only perform troubleshooting and simple repairs as authorized in your product documentation, or as directed by the online or telephone service and support team. Damage due to servicing that is not authorized by Dell is not covered by your warranty. Read and follow the safety instructions that are shipped with your product.

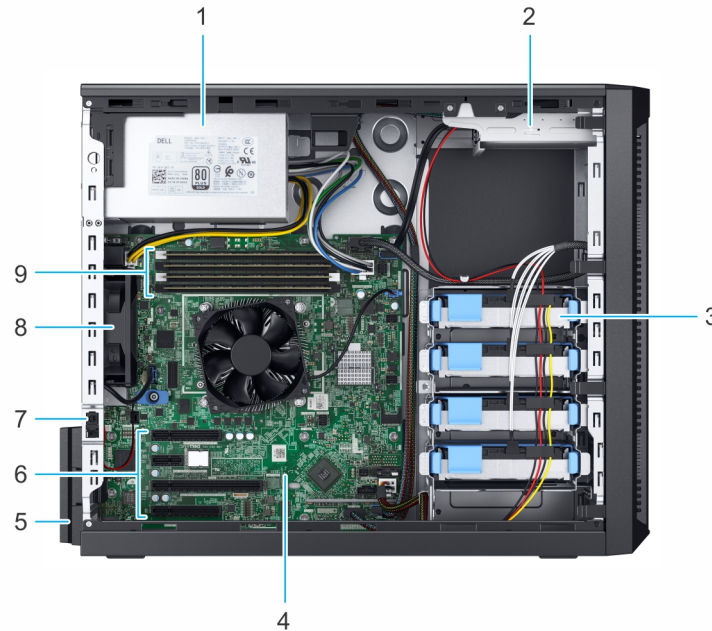


Figure 3. Inside the system

- | | |
|-----------------------------------|----------------------------------|
| 1. Cabled Power Supply Unit (PSU) | 2. Optical drive |
| 3. Cabled drives (4) | 4. System board |
| 5. Expansion card retention latch | 6. PCIe expansion card slots (4) |
| 7. Intrusion switch | 8. Fan |
| 9. Memory module sockets | |

Locating the Service Tag of your system

You can identify your system using the unique Express Service Code and Service Tag. Pull out the information tag in front of the system to view the Express Service Code and Service Tag. Alternatively, the information may be on a sticker on the chassis of the system. The mini Enterprise Service Tag (EST) is found on the back of the system. This information is used by Dell to route support calls to the appropriate personnel.

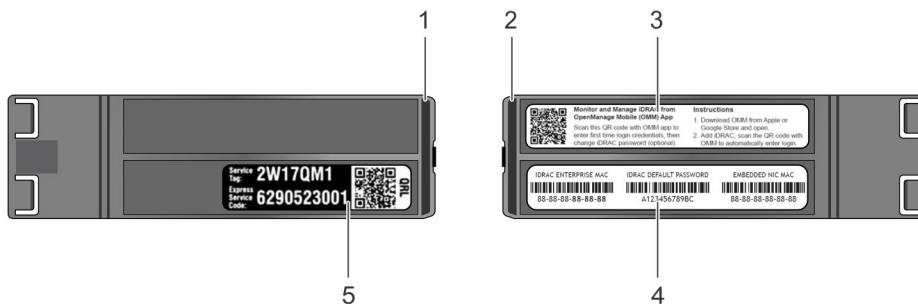


Figure 4. Locating Service Tag of your system

- | | |
|-------------------------------|--------------------------------|
| 1. Information tag (top view) | 2. Information tag (back view) |
|-------------------------------|--------------------------------|

3. OpenManage Mobile (OMM) label
5. Service Tag

4. iDRAC MAC address and iDRAC secure password label

Processor

The PowerEdge T140 is the 1-socket, entry-level tower server based on the Intel® Xeon® processor E-2100 and E-2200 product family.

Topics:

- [Processor features](#)
- [Supported processors](#)
- [Chipset](#)

Processor features

The following table lists the features of the Intel® Xeon® processor E-2100 and E-2200 product family:

- Up to six execution cores per processor
- Four DMI3 lanes
- 16 PCIe Gen 3 links capable of 8.0 GT/s
- Socket H4, LGA package (LGA1151)
- Integrated 2 channel DDR4 memory controller
- Execute Disable Bit
- Support Turbo Boost Technology 2.0
- Increases CPU frequency if operating below thermal, power, and current limits
- Intel® Virtualization Technology (Intel® VT)

NOTE: We do not support graphics with E-2100 and E-2200 processors, Graphics cannot be enabled on Dell EMC servers using this processor due to technical restrictions.

Supported processors

The following table lists the supported processors for the PowerEdge T140:

Model	Speed (GHz)	Power (Watts)	Cores	L3 Cache (MB)	Threads	Turbo	Max Memory Speed (MT/s)	Hyper-threading	Intel Software Guard Extensions Support
E-2286G	4	95	6	12	12	Yes	2666	Yes	Yes
E-2276G	3.8	80	6	12	12	Yes	2666	Yes	Yes
E-2274G	4	83	4	8	8	Yes	2666	Yes	Yes
E-2246G	3.6	80	6	12	12	Yes	2666	Yes	No
E-2244G	3.8	71	4	8	8	Yes	2666	Yes	No
E-2236	3.4	80	6	12	12	Yes	2666	Yes	No
E-2234	3.6	71	4	8	8	Yes	2666	Yes	No
E-2226G	3.4	80	6	12	6	Yes	2666	Yes	No
E-2224	3.4	71	4	8	4	Yes	2666	Yes	No
Core i3 9100	3.6	65	4	6	4	Yes	2666	No	No

Model	Speed (GHz)	Power (Watts)	Cores	L3 Cache (MB)	Threads	Turbo	Max Memory Speed (MT/s)	Hyper-threading	Intel Software Guard Extensions Support
Pentium G5420	3.8	58	2	4	4	Yes	2666	No	No
Celeron G4930	3.2	54	2	2	4	Yes	2666	No	No
E-2186G	3.8	95	6	12	12	Yes	2666	Yes	Yes
E-2176G	3.7	80	6	12	12	Yes	2666	Yes	Yes
E-2174G	3.8	71	4	8	8	Yes	2666	Yes	Yes
E-2146G	3.5	80	6	12	12	Yes	2666	Yes	No
E-2144G	3.6	71	4	8	8	Yes	2666	Yes	No
E-2136	3.3	80	6	12	12	Yes	2666	Yes	No
E-2134	3.5	71	4	8	8	Yes	2666	Yes	No
E-2126G	3.3	80	6	12	6	Yes	2666	No	No
E-2124	3.3	71	4	8	4	Yes	2666	No	No
Core i3 8100	3.6	65	4	6	4	No	2666	No	No
Pentium G5500	3.8	54	2	4	2	No	2666	No	No
Celeron G4900	3.1	54	2	2	2	No	2666	No	No

Chipset

The following table shows the high level features supported by the C246 chipset implemented on the PowerEdge T140:

PCH feature	C246	T140
TXT	Y	Y
Node Manager	Y	N
ECC	Y	Y
FlexIO - USB3.0 - 10 (means 6 is enough)	10	3
USB 2.0	4	4
FlexIO - 8 SATA ports	8	5
FlexIO - SATA Express	3	0
FlexIO - PCIE 3.0 ports - additional required	20	8
SPI (MB) FW image	7	UI
Intel vPRO/AMT11	Y	N
Rapid Strorage technology	Y	N
Rapid Strorage technology enterprise	Y	N
Data Center Graphics	N	N

PCH feature	C246	T140
supported displays	3	N
Int. Gbe MAC	Y	N
eSPI	Y	N
IO Flex - ability to change SATA/PCIE/USB	Y	N
Software Guard Extensions (SGX)	N	Y

The following table shows the features supported by the T140 chipset:

Table 3. Chipset features

Features	Description
DMI interface	Direct Media Interface 3 (DMI3) connects the CPU1 to the chipset. DMI3 is similar to a four lane PCI Express supporting a speed of 8 GT/s per lane.
PCI Express interface	PCI Express Generation 3 (PCIe Gen3) is capable of 8 GT/s bit rate (compared to PCIe Gen 2's 5 GT/s) per lane. Because PCIe Gen3 uses a "scrambling" encoding instead of PCIe Gen2's 8b/10b encoding, it is able to have double the bandwidth of PCIe Gen2. The PCIe Gen 3 will be fully compatible with prior generations of this technology, from software to clocking architecture to mechanical interfaces.
AHCI	The chipset SATA controller provides hardware support for Advanced Host Controller Interface (AHCI), a standardized programming interface for SATA host controllers developed through a joint industry effort. Platforms supporting AHCI may take advantage of performance features such as port independent DMA Engines—each device is treated as a master—and hardware-assisted native command queuing.
Low Pin Count Interface (LPC)	The chipset implements an LPC interface.
Serial Peripheral Interface (SPI)	The chipset provides one Serial Peripheral Interface (SPI). The interface implements 3 Chip Select signals (CS#), allowing up to two flash devices and one TPM device to be connected to the PCH. The CS0# and CS1# are used for flash devices and CS2# is dedicated to TPM.
Advanced Programmable Interrupt Controller (APIC)	The I/O APIC within the chipset supports 40 APIC interrupts. Each interrupt has its own unique vector assigned by software.
Real Time Clock (RTC)	The Real-Time Clock (RTC) performs two key functions—keeping track of the time of day and storing system data, even when the system is powered down. The RTC operates on a 32.768-KHz crystal and a 3V battery.
General-Purpose Input/Output (GPIO)	GPIO Serial Expander (GSX) is the capability provided by the chipset to expand the GPIOs on a platform that needs more GPIOs than the ones provided by the PCH. The solution requires external shift register discrete components.
System Management Bus (SMBus 2.0)	The chipset provides a System Management Bus (SMBus) 2.0 host controller as well as an SMBus Slave Interface. The chipset is also capable of operating in a mode in which it can communicate with I2C compatible devices. The host SMBus controller supports up to 100- KHz clock speed.

Table 3. Chipset features (continued)

Features	Description
JTAG Boundary-Scan	This section contains information regarding the chipset testability signals that provides access to JTAG, run control, system control, and observation resources. PCH JTAG (TAP) ports are compatible with the IEEE Standard Test Access Port and Boundary Scan Architecture 1149.1 and 1149.6 Specification, as detailed per device in each BSDL file. JTAG Pin definitions are from IEEE Standard Test Access Port and Boundary-Scan.

Memory

The PowerEdge T140 supports up to 4 DDR4 DIMMs. The T140 is designed to support the socket H4, Intel® Xeon® processor E-2100 and E-2200 product family CPU, which has 2 memory channels per CPU, with each channel supporting up to 2 DIMMs.

The maximum system population at launch will be 64GB. The minimum system population is one 8GB DIMM.

Supported memory

The PowerEdge T140 supports memory with the following features:

- Unbuffer (UDIMM) ECC DDR4 technology
- Each channel carries 64 data and 8 ECC bits
- Up to 64 GB of UDIMM memory (4 x 16GB UDIMM)
- Up to 2666 MT/s DIMMs
- Flexible Memory Configuration
- ODT (On Die Termination)
- Clock gating (CKE) to conserve power when DIMMs are not accessed
- DIMMs enter a low power self-refresh mode
- I²C access to SPD EEPROM for access to thermal sensors
- Memory Optimized (Independent Channel) Mode
- 100% Single Bit Error Correction
- Memory Off-lining is NOT supported.

Memory speed

The PowerEdge T140 supports 2666MT/s DDR4 memory. This system will run all memory on all CPUs and channels at the same speed and voltage. By default the system will run at the highest speed for the lowest voltage of the worst case channel DIMM configuration.

The operating speed of the system is determined by:

- Supported speed of DIMMs
- DIMM configuration on any channel
- Max speed supported by the CPU
- Speed request by user in BIOS setup screen

The operating voltage of the system is determined by:

- Voltages supported by the DIMMs which is 1.2V.
- Voltages supported by the platform.

Memory population and configuration

The following table shows the supported memory configurations for the PowerEdge T140:

DIMM Speed	DIMM Type	DIMM Capacity (GB)	Ranks per DIMM	Data Width	SDDC Support	DIMM Volts
2666	UDIMM	8	1	x8	Advanced ECC	1.2
2666	UDIMM	8	1	x8	Advanced ECC	1.2
2666	UDIMM	16	1	x8	Advanced ECC	1.2

DIMM Speed	DIMM Type	DIMM Capacity (GB)	Ranks per DIMM	Data Width	SDDC Support	DIMM Volts
2666	UDIMM	16	1	x8	Advanced ECC	1.2
2400	UDIMM	4	1	x8	Advanced ECC	1.2
2400	UDIMM	8	1	x8	Advanced ECC	1.2
2400	UDIMM	8	1	x8	Advanced ECC	1.2
2400	UDIMM	16	2	x8	Advanced ECC	1.2
2400	UDIMM	16	2	x8	Advanced ECC	1.2
2133	UDIMM	4	1	x8	Advanced ECC	1.2
2133	UDIMM	4	1	x8	Advanced ECC	1.2
2133	UDIMM	8	2	x8	Advanced ECC	1.2
2133	UDIMM	8	1	x8	Advanced ECC	1.2
2133	UDIMM	16	2	x8	Advanced ECC	1.2
2133	UDIMM	16	2	x8	Advanced ECC	1.2

The following table shows the memory populations and system speed:

Table 4. Memory populations and system speed

DIMM Type	DIMM Ranking	Capacity	DIMM Rated voltage	1 DIMM per channel	2 DIMMs per channel
UDIMM	1R/2R	8GB, and 16GB	DDR4 (1.2V)	2666	2666

Storage

The PowerEdge T140 supports 4 x 3.5-inch cabled hard drive configuration. The T140 will offer “Entry” as well as “Enterprise” hard drives. It is extremely important to set customer expectations around proper usage. Using Entry drives in improper usage pattern will result in risk to smooth operation and customer satisfaction. It is key to select the hard drive class that balances customer budget, performance and reliability, and that delivers worry-free computing and complete satisfaction.

Recommend/select Entry level hard drives vs. Enterprise level hard drives based on customer usage pattern:

- Entry drives are designed for customer applications with less intensive workload rating
- Entry level hard drives are designed for a 8x5 days/week operation
- Enterprise level hard drives are designed for a 24x7 operating environment

Entry level hard drive restrictions

- Entry level hard drives and Enterprise level hard drives cannot be mixed
- Cannot be ordered with Software Raid or Hardware Raid. Must be selected in a NO RAID configuration
- Must not be used if the customer usage patterns require a workload rating that exceeds 55 TB/year
- May induce compatibility issues depending on the OS due to the “advanced format”
- Entry level SATA hard drives in PowerEdge systems carry lesser of either a 1-year limited hardware warranty or the length of the limited hardware warranty for the Dell EMC system with which the hard drive is shipped.

The following table shows the differences between entry level hard drives and the enterprise level hard drives:

Feature	Entry level SATA HDDs	Enterprise level SATA HDDs
RPM	7200 RPM	7200 RPM
SATA Interface	6 G b / s	6 G b / s
HDD Sector Format	512 byte AF (advanced format)	512 byte
UBER (unrecovered error rate)	1x10 14	1x10 15
Performance Variation	u p t o + / - 35 %	+ / - 5 %
Vibration RV (Radians/sec/sec)	5.5 up to 300 Hz	12.5 up to 1500 Hz

Topics:

- [Supported hard drives](#)
- [Storage Controller](#)
- [Optical drive](#)
- [Tape drive](#)
- [vFlash and BOSS card](#)

Supported hard drives

The PowerEdgeT140 provides scalable storage that enables you to adapt your workload and operational demands. The drive bay supports up to four 3.5-inch SATA/SAS drives.

Table 5. Supported Drives - SAS and SATA

Form Factor	Type	Speed	Rotationa l Speed	Capacities
3.5-inch	SATA	6 Gbps	7.2 K	1 TB, 2 TB, 4 TB
	SAS	12 Gbps	7.2 K	2 TB, 4 TB

Storage Controller

Dell EMC's RAID controller options offer performance improvements, including the MiniPERC solution. Mini PERC provides a base RAID HW controller without consuming a PCIe slot by using a small form factor and high density connector to the base planar.

The new PERC controller offerings leverage heavily on previous generation PERC family. The premium performance PERC series controller drives better IOPs and enhanced the SSD performance.

Table 6. PERC series controller offerings

Performance Level	Controller & Description
Entry	S140 SW RAID SATA
Value	HBA330 (Internal) 12Gbps SAS HBA (External) Memory: None x8 12 Gb SAS x8 PCIe 3.0 H330
Value Performance	H730P Memory: 2GB, NV 72-bit, 866MHz x8 12 Gb SAS x8 PCIe 3.0

Optical drive

The PowerEdge T140 will support up to one internal optical drives, and optional external USB DVD-ROM including ability to boot from.

Tape drive

The PowerEdge T140 do not support internal tape drives due to the form factor. However, external tape backup devices will be supported. The list below shows the supported external tape drives:

- LTO-6 SAS
- LTO-7 SAS
- LTO-8 SAS

vFlash and BOSS card

A SD vFlash card is a Secure Digital (SD) card that plugs into the SD vFlash card slot in the iDRAC port card. It provides persistent on-demand local storage and a custom deployment environment that enables automation of server configuration, scripts, and imaging. It emulates USB device(s).

Boot Optimized Storage Subsystem (BOSS)

BOSS is offered as a means of booting servers to a full OS when:

- A solution such as IDSDM may be desired, but the target OS for BOSS is a fullOS (not just a hypervisor)
- The user needs to maximize their number of drive bays

BOSS cards take up a PCIe slot and are not hot-plug capable. 1x or 2x 240GB modules are available. Dual (2x) module configs can be set up for either RAID 1 or No RAID. Single (1x) module configs can only be set up in a No RAID config.

Networking and PCIe

The following lists the supported add in communication cards:

- 1GB Intel (Dual) Powerville Troi-Stony Dual port 1Gb Base-T adapter - FH
- 1GB Intel (Quad) Powerville Lore-Stony Quad port 1Gb Base-T adapter- FH
- 1GB Broadcom (Dual)5720 Bashir Dual port 1Gb Base-T adapter- FH
- 1GB Broadcom (Quad) 5719 Cardassia Quad port 1Gb Base-T adapter - FH

PCIe slots

The PowerEdge T140 chipset provides four PCI Express expansion slots as follows:

- Slot 1 : x8 PCIe Gen3 for FH/HL from CPU (x8 lanes)
- Slot 2 : x16 PCIe Gen3 for FH/HL from CPU (x8 lanes)
- Slot 3 : x1 PCIe Gen3 for FH/HL from PCH (x1 lanes)
- Slot 4 : x8 PCIe Gen3 for FH/HL from PCH (x4 lanes)

The following table shows the PCIe slot location and specifications:

PCI Slot	Mechanical	Electrical	Height	Length
1	PCIe x 8	PCIe x 8 Gen 3	Full Height	Half Length
2	PCIe x16	PCIe x 8 Gen 3	Full Height	Half Length
3	PCIe x 1	PCIe x 1 Gen 3	Full Height	Half Length
4	PCIe x 8	PCIe x 4 Gen 3	Full Height	Half Length

The following table shows the dimensions of the PCI cards:

Slots	Height	Length
Slot 1 (standard height, half length card)	111.15 mm (4.376 inches) maximum	167.65 mm (6.600 inches) maximum
Slot 2 (standard height, half length card)	111.15 mm (4.376 inches) maximum	167.65 mm (6.600 inches) maximum
Slot 3 (standard height, half length card)	111.15 mm (4.376 inches) maximum	167.65 mm (6.600 inches) maximum
Slot 4 (standard height, half length card)	111.15 mm (4.376 inches) maximum	167.65 mm (6.600 inches) maximum

Power and acoustics

Topics:

- [Power supply units](#)
- [Acoustics](#)

Power supply units

The power supply subsystem is formed with a AC-DC cable power supply. The power supply provides +12V and +12Vaux for non-redundant design. There are several voltage regulators in the system to supply different voltage levels needed by different logic devices.

The following table shows the heat dissipation of the power supply units:

Table 7. Heat dissipation

Heat dissipation	989 BTU/hr maximum (290W power supply)
Voltage	100-240 V AC, autoranging, 50/60 Hz

Acoustics

The PowerEdge T140 is a tower server appropriate for quiet office environment. The acoustical output is not noticeable under idle or typical operating condition. Acoustical performance for two configurations are provided: typical and feature rich. The following tables contains a summary of the configuration and acoustical performance of the PET140. Each configuration has been tested according to Dell EMC acoustical standards for tower servers.

Configuration	Minimum	Typical	Feature rich
CPU Type	Intel E2124	Intel E2124	Intel E2146G
CPU TDP	71 W	71 W	80 W
CPU Quantity	1	1	1
Memory Type	8GB, UDIMM	16GB, UDIMM	16GB, UDIMM
DIMM Quantity	1	2	2
HDD Type	7.2K RPM SATA	7.2K RPM SATA	7.2K RPM SATA
HDD Quantity	1	2	4
PSU Type	365W Cabled	365W Cabled	365W Cabled
PSU Quantity	1	1	1
Internal PERC	None	None	PERC H330

Table 8. Acoustical performance: Idle/operating at 25°C ambient

Configuration	Minimum	Typical	Feature rich
LwA-UL ² (Bels)	Idle	3.6	3.7
	Operating	3.8	4.8
LpA ³ (dBA)	Idle	22	23

Table 8. Acoustical performance: Idle/operating at 25°C ambient (continued)

Configuration		Minimum	Typical	Feature rich
	Operating	27	28	32
Prominent tones		No prominent tones in Idle and Operating		

Table 9. Acoustical performance: Idle/operating at 28°C ambient

Configuration	Minimum	Typical	Feature rich
LwA-UL ² (Bels)	3.9	3.9	3.9
LpA ³ (dBA)	26	26	26

Table 10. Acoustical performance: Max loading at 35°C ambient

Configuration	Minimum	Typical	Feature rich
LwA-UL ² (Bels)	5.2	5.2	5.2
LpA ³ (dBA)	36	36	36

Supported operating systems

The list below are the supported operating systems for the PowerEdge T140:

- Windows 2019 with Hyper-V
- Windows 2019 Essentials
- Windows 2016 with Hyper-V
- Windows 2016 Essentials
- Windows 2012 R2 Enterprise
- Windows 2012 R2 Standard

 **NOTE:** Windows 2012 R2 is not supported with E-2200 processor configurations.

- RHEL 7.5
- SLES 15
- Ubuntu Server 18.04.1
- Citrix XenServer 7.1
- VMWare ESXi 6.7
- VMWare ESXi 6.5

Dell EMC OpenManage systems management

Dell EMC OpenManage Portfolio

Simplifying hardware management through ease of use and automation

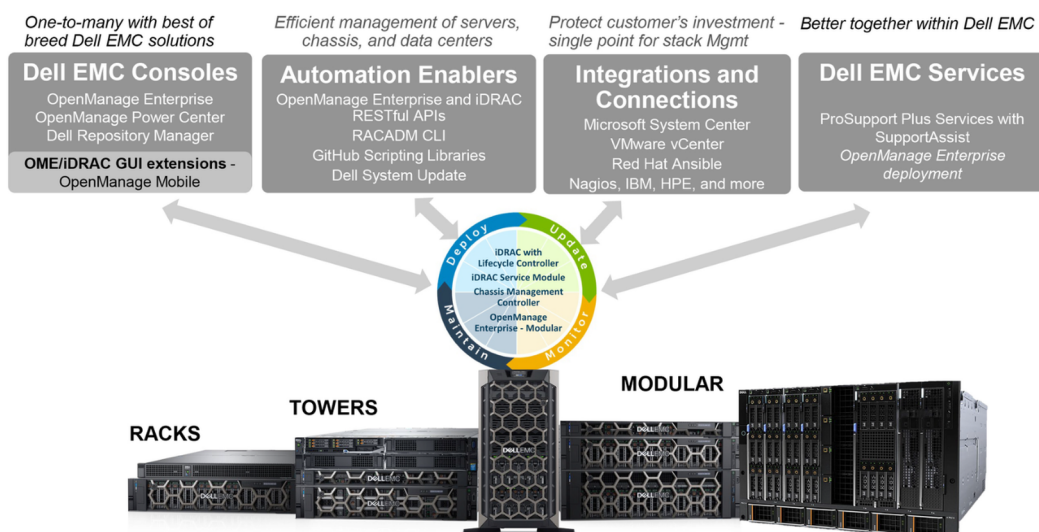


Figure 5. Dell EMC OpenManage Portfolio

Dell EMC delivers management solutions that help IT Administrators effectively deploy, update, monitor, and manage IT assets. OpenManage solutions and tools enable you to quickly respond to problems by helping them to manage Dell EMC servers effectively and efficiently; in physical, virtual, local, and remote environments, operating in-band, and out-of-band (agent-free). The OpenManage portfolio includes innovative embedded management tools such as the integrated Dell Remote Access Controller (iDRAC), Chassis Management Controller and Consoles like OpenManage Enterprise, OpenManage Power Manager plug in, and tools like Repository Manager.

Dell EMC has developed comprehensive systems management solutions based on open standards and has integrated with management consoles that can perform advanced management of Dell hardware. Dell EMC has connected or integrated the advanced management capabilities of Dell hardware into offerings from the industry's top systems management vendors and frameworks such as Ansible, thus making Dell EMC platforms easy to deploy, update, monitor, and manage.

The key tools for managing Dell EMC PowerEdge servers are iDRAC and the one-to-many OpenManage Enterprise console. OpenManage Enterprise helps the system administrators in complete lifecycle management of multiple generations of PowerEdge servers. Other tools such as Repository Manager, which enables simple yet comprehensive change management.

OpenManage tools integrate with systems management framework from other vendors such as VMware, Microsoft, Ansible, and ServiceNow. This enables you to use the skills of the IT staff to efficiently manage Dell EMC PowerEdge servers.

Topics:

- [Server and Chassis Managers](#)
- [Dell EMC consoles](#)
- [Automation Enablers](#)
- [Integration with third-party consoles](#)
- [Connections for third-party consoles](#)
- [Dell EMC Update Utilities](#)
- [Dell resources](#)

Server and Chassis Managers

- Integrated Dell Remote Access Controller (iDRAC)
- Dell EMC OpenManage Enterprise Modular (OME-M)
- Chassis Management Controller (CMC)
- iDRAC Service Module (iSM)

Dell EMC consoles

- Dell EMC OpenManage Enterprise
- Dell EMC Repository Manager (DRM)
- Dell EMC OpenManage Enterprise Power Manager plugin to OpenManage Enterprise
- Dell EMC OpenManage Mobile (OMM)

Automation Enablers

- OpenManage Ansible Modules
- iDRAC RESTful APIs (Redfish)
- Standards-based APIs (Python, PowerShell)
- RACADM Command Line Interface (CLI)
- GitHub Scripting Libraries

Integration with third-party consoles

- Dell EMC OpenManage Integrations with Microsoft System Center
- Dell EMC OpenManage Integration for VMware vCenter (OMIVV)
- Dell EMC OpenManage Ansible Modules
- Dell EMC OpenManage Integration with ServiceNow

Connections for third-party consoles

- Micro Focus and other HPE tools
- OpenManage Connection for IBM Tivoli
- OpenManage Plug-in for Nagios Core and XI

Dell EMC Update Utilities


- Dell System Update (DSU)
- Dell EMC Repository Manager (DRM)
- Dell EMC Update Packages (DUP)
- Dell EMC Server Update Utility (SUU)
- Dell EMC Platform Specific Bootable ISO (PSBI)

Dell resources

For additional information about white papers, videos, blogs, forums, technical material, tools, usage examples, and other information, go to the OpenManage page at <https://www.dell.com/openmanagemanuals> or the following product pages:

Table 11. Dell resources

Resource	Location
Integrated Dell Remote Access Controller (iDRAC)	https://www.dell.com/idracmanuals
iDRAC Service Module (iSM)	https://www.dell.com/support/article/sln310557
OpenManage Ansible Modules	https://www.dell.com/support/article/sln310720
OpenManage Essentials (OME)	https://www.dell.com/support/article/sln310714
OpenManage Enterprise Modular	https://www.dell.com/OME-modular
OpenManage Mobile (OMM)	https://www.dell.com/support/article/sln310980
OpenManage Integration for VMware vCenter (OMIVV)	https://www.dell.com/support/article/sln311238
OpenManage Integration for Microsoft System Center (OMIMSSC)	https://www.dell.com/support/article/sln312177
Dell EMC Repository Manager (DRM)	https://www.dell.com/support/article/sln312652
Dell EMC System Update (DSU)	https://www.dell.com/support/article/sln310654
Dell EMC Platform Specific Bootable ISO (PSBI)	Dell.com/support/article/sln296511
Dell EMC Chassis Management Controller (CMC)	www.dell.com/support/article/sln311283
OpenManage Connections for Partner Consoles	https://www.dell.com/support/article/sln312320
OpenManage Enterprise Power Manager	https://www.dell.com/solutions/openmanage/power-management.htm
OpenManage Integration with ServiceNow (OMISNOW)	Dell.com/support/article/sln317784

 **NOTE:** Features may vary by server. Please refer to the product page on <https://www.dell.com/manuals> for details.

Appendix A. Additional specifications

Topics:

- Chassis dimensions
- Video
- USB ports
- Hard drives
- NIC ports
- Environmental specifications

Chassis dimensions

This section describes the physical dimensions of the system.

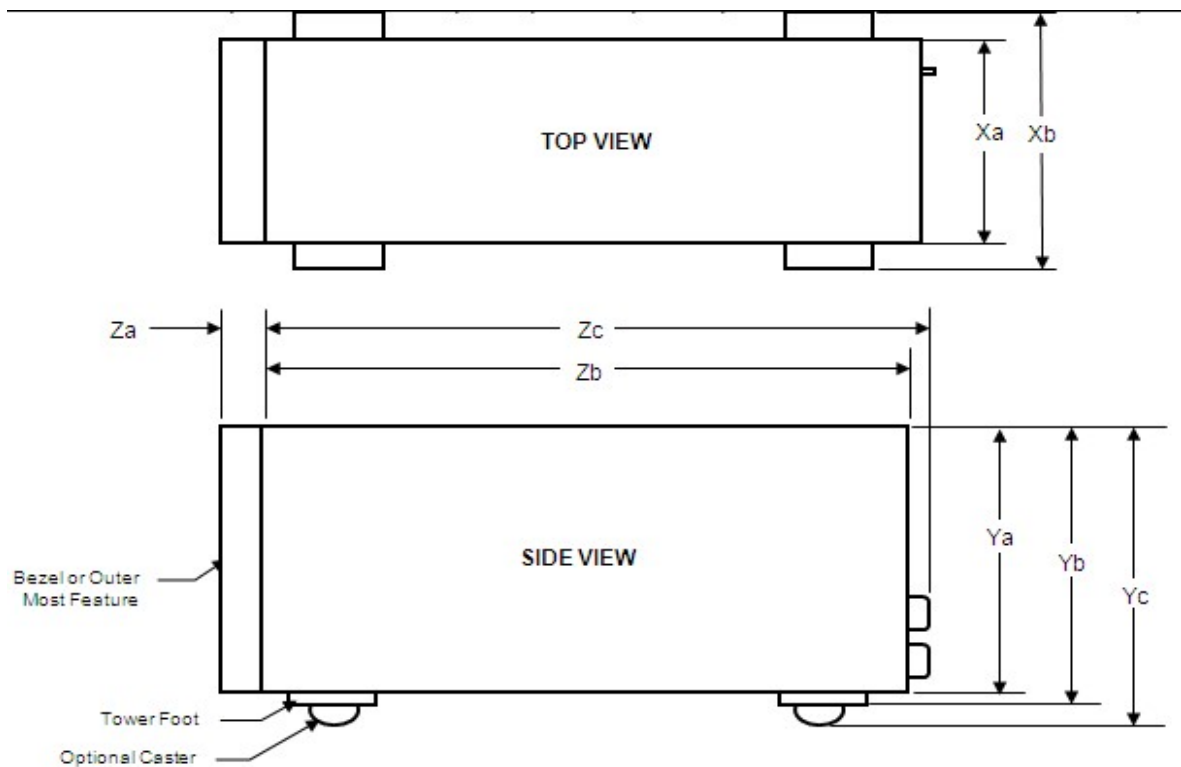


Figure 6. Chassis dimensions of the PowerEdge T140 system

The following table shows the dimension details of the PowerEdge T140:

Xa	Xb	Ya	Yb	Yc	Za with bezel	Za without bezel	Zb*	Zc	Max Sys Wgt (Kg)
175 mm (6.89 inches)	N/A	360 mm (14.17 inches)	362.9 mm (14.29 inches)	N/A	35.0mm (1.38 inches)	N/A	400.0 mm (15.75 inches)	418.75 mm (16.49 inches)	11.84

Video

The following list the video specifications for the PowerEdge T140:

- Video type: Integrated Matrox G200 with iDRAC9
- Video memory: 16 MB shared with iDRAC9 application memory

USB ports


The PowerEdge T140 supports the USB ports mentioned below:

Table 12. USB specifications

System	PowerEdge T140
Front panel	<ul style="list-style-type: none">• 1 USB 3.0• 1 Micro USB 2.0 (dedicated iDRAC direct)
Back panel	<ul style="list-style-type: none">• 2 USB 3.0• 4 USB 2.0
Internal	One USB 3.0-compliant port

Hard drives

The PowerEdge T140 supports SAS, SATA, Nearline SAS drives/SSD drives. The supported hard drive configuration is 4 x 3.5-inch cabled configuration. The following table shows the supported hard drive and capacity:

Feature	Description
Hard drives	<ul style="list-style-type: none">• 3.5" Enterprise SATA 7.2K HDDs• 3.5" Near Line SAS 7.2K HDDs• 3.5" 7.2K SATA Client Drives
Capacity	<ul style="list-style-type: none">• 1 TB• 2 TB• 4 TB <p> NOTE: 4TB requires PERC H330 or H730P</p>

NIC ports

The PowerEdge T140 supports two 10/100/1000 Mbps NIC ports at the back panel.

Environmental specifications

This section includes the environmental specifications for the PowerEdge T140:

Feature	Descriptions
Temperature	<ul style="list-style-type: none">• Maximum temperature gradient (Operating and storage)<ul style="list-style-type: none">○ 20 °C/h (36 °F/h)• Storage temperature limits<ul style="list-style-type: none">○ -40 °C to 65 °C (-40 °F to 149 °F)

Feature	Descriptions
Relative humidity	<ul style="list-style-type: none"> ● 5% to 95% RH with 33 °C (91 °F) maximum dew point. Atmosphere must be noncondensing at all times.
Temperature (continuous operation)	<ul style="list-style-type: none"> ● Temperature ranges (for altitude less than 950 m or 3117 ft) <ul style="list-style-type: none"> ○ 10 °C to 35 °C (50 °F to 95 °F) with no direct sunlight on the equipment. ● Humidity percentage range <ul style="list-style-type: none"> ○ 10% to 80% Relative Humidity with 29 °C(84.2 °F) maximum dew point.
Maximum vibration	<ul style="list-style-type: none"> ● Operating <ul style="list-style-type: none"> ○ 0.26 Grms at 5 Hz to 350 Hz (operationorientation). ● Storage <ul style="list-style-type: none"> ○ 1.88 Grms at 10 Hz to 500 Hz for 15 min (allsix sides tested).
Maximum shock	<ul style="list-style-type: none"> ● Operating <ul style="list-style-type: none"> ○ Six consecutively executed shock pulses in the positive and negative x, y, and z axes of 31 G for up to 2.6 ms. ● Storage <ul style="list-style-type: none"> ○ One pulse on each side of the system of 71 G up to 2 ms.
Maximum altitude	<ul style="list-style-type: none"> ● Operating <ul style="list-style-type: none"> ○ 3,048 m (10,000 ft) ● Storage <ul style="list-style-type: none"> ○ 12,000 m (39,370 ft)
Operating Altitude De-rating, Up to 35 °C (95 °F)	<ul style="list-style-type: none"> ● Maximum temperature is reduced by 1°C/300 m (1 °F/547 ft) above 950 m (3,117 ft).

Appendix B. Standards compliance

The system conforms to the following industry standards.

Table 13. Industry standard documents

Standard	URL for information and specifications
ACPI Advance Configuration and Power Interface Specification, v2.0c	https://uefi.org/specsandtesttools
Ethernet IEEE 802.3-2005	https://standards.ieee.org/
HDG Hardware Design Guide Version 3.0 for Microsoft Windows Server	microsoft.com/whdc/system/platform/pcdesign/desguide/serverdg.aspx
IPMI Intelligent Platform Management Interface, v2.0	intel.com/design/servers/ipmi
DDR4 Memory DDR4 SDRAM Specification	jedec.org/standards-documents/docs/jesd79-4.pdf
PCI Express PCI Express Base Specification Rev. 2.0 and 3.0	pcisig.com/specifications/pciexpress
PMBus Power System Management Protocol Specification, v1.2	http://pmbus.org/Assets/PDFS/Public/PMBus_Specification_Part_I_Rev_1-1_20070205.pdf
SAS Serial Attached SCSI, v1.1	http://www.t10.org/
SATA Serial ATA Rev. 2.6; SATA II, SATA 1.0a Extensions, Rev. 1.2	sata-io.org
SMBIOS System Management BIOS Reference Specification, v2.7	dmtf.org/standards/smbios
TPM Trusted Platform Module Specification, v1.2 and v2.0	trustedcomputinggroup.org
UEFI Unified Extensible Firmware Interface Specification, v2.1	uefi.org/specifications
USB Universal Serial Bus Specification, Rev. 2.0	usb.org/developers/docs

Appendix C Additional resources

Table 14. Additional resources

Resource	Description of contents	Location
Installation and Service Manual	<p>This manual, available in PDF format, provides the following information:</p> <ul style="list-style-type: none"> • Chassis features • System Setup program • System messages • System codes and indicators • System BIOS • Remove and replace procedures • Troubleshooting • Diagnostics • Jumpers and connectors 	Dell.com/Support/Manuals
Getting Started Guide	<p>This guide ships with the system, and is also available in PDF format. This guide provides the following information:</p> <ul style="list-style-type: none"> • Initial setup steps • Key system features • Technical specifications 	Dell.com/Support/Manuals
Rack Installation Instructions	This document ships with the rack kits, and provides instructions for installing a server in a rack.	Dell.com/Support/Manuals
Information Update	This document ships with the system, is also available in PDF format online, and provides information on system updates.	Dell.com/Support/Manuals
System Information Label	The system information label documents the system board layout and system jumper settings. Text is minimized due to space limitations and translation considerations. The label size is standardized across platforms.	Inside the system chassis cover
Quick Resource Locator (QRL)	This code on the chassis can be scanned by a phone application to access additional information and resources for the server, including videos, reference materials, service tag information, and Dell EMC contact information.	Inside the system chassis cover
Energy Smart Solution Advisor (ESSA)	The Dell EMC online ESSA enables easier and more meaningful estimates to help you determine the most efficient configuration possible. Use ESSA to calculate the power consumption of your hardware, power infrastructure, and storage.	Dell.com/calc

Appendix D. Support and deployment services

Topics:

- Dell EMC ProDeploy Enterprise Suite
- Deployment services
- Dell EMC Remote Consulting Services
- Dell EMC Data Migration Service
- ProSupport Enterprise Suite
- ProSupport Plus
- ProSupport
- ProSupport One for Data Center
- Support Technologies
- Additional professional services
- Dell Education Services
- Dell EMC Global Infrastructure Consulting Services
- Dell EMC Managed Services

Dell EMC ProDeploy Enterprise Suite

ProDeploy Enterprise Suite gets your server out of the box and into optimized production—fast. Our elite deployment engineers with broad and deep experience utilizing best-in-class processes along with our established global scale can help you around the clock and around the globe. From simple to the most complex server installations and software integration, we take the guess work and risk out of deploying your new server technology.

		Basic Deployment	ProDeploy	ProDeploy Plus
Pre-deployment	Single point of contact for project management		•	In-region
	Site readiness review		•	•
	Implementation planning		•	•
	Technology Service Manager (TSM) engagement for ProSupport Plus entitled devices			•
Deployment	Deployment service hours	Business hours	24x7	24x7
	Onsite hardware installation*	•	•	•
	Packaging materials disposal	•	•	•
	Install and configure system software		•	Onsite
Post-deployment	Project documentation with knowledge transfer		•	•
	Deployment verification		•	•
	Configuration data transfer to Dell EMC technical support		•	•
	30-days of post-deployment configuration assistance			•
	Training credits for Dell EMC Education Services			•

Figure 7. ProDeploy Enterprise Suite capabilities

NOTE: Hardware installation not applicable on selected software products.

Dell EMC ProDeploy Plus

From beginning to end, ProDeploy Plus provides the skill and scale needed to successfully execute demanding deployments in today's complex IT environments. Certified Dell EMC experts start with extensive environmental assessments and detailed migration planning and recommendations. Software installation includes set up of most versions of Dell EMC SupportAssist and

OpenManage system management utilities. Post-deployment configuration assistance, testing, and product orientation services are also available.

Dell EMC ProDeploy

ProDeploy provides full service installation and configuration of both server hardware and system software by certified deployment engineers including set up of leading operating systems and hypervisors as well as most versions of Dell EMC SupportAssist and OpenManage system management utilities. To prepare for the deployment, we conduct a site readiness review and implementation planning exercise. System testing, validation, and full project documentation with knowledge transfer complete the process.

Dell EMC Basic Deployment

Basic Deployment delivers worry-free professional installation by experienced technicians who know Dell EMC servers inside and out.

Dell EMC Residency Services

Residency Services helps customers transition to new capabilities quickly with the assistance of on-site or remote Dell EMC experts whose priorities and time you control. Residency experts can provide post implementation management and knowledge transfer related to a new technology acquisition or day-to-day operational management of the IT infrastructure.

Deployment services

Deployment services details and exceptions can be found in service description documents at the Enterprise Configuration and Deployment page on Dell.com.

Dell EMC Remote Consulting Services

When you are in the final stages of your PowerEdge server implementation, you can rely on Dell EMC Remote Consulting Services and our certified technical experts to help you optimize your configuration with best practices for your software, virtualization, server, storage, networking, and systems management.

Dell EMC Data Migration Service

Protect your business and data with our single point of contact to manage your data migration project. Your project manager will work with our experienced team of experts to create a plan using industry-leading tools and proven processes based on global best practices to migrate your existing files and data so your business system get up and running quickly and smoothly.

ProSupport Enterprise Suite

With the ProSupport Enterprise Suite, we can help you keep your operation running smoothly, so you can focus on running your business. We will help you maintain peak performance and availability of your most essential workloads. ProSupport Enterprise Suite is a suite of support services that enable you to build the solution that is right for your organization. Choose support models based on how you use technology and where you want to allocate resources. From the desktop to the data center, address everyday IT challenges, such as unplanned downtime, mission-critical needs, data and asset protection, support planning, resource allocation, software application management and more. Optimize your IT resources by choosing the right support model.

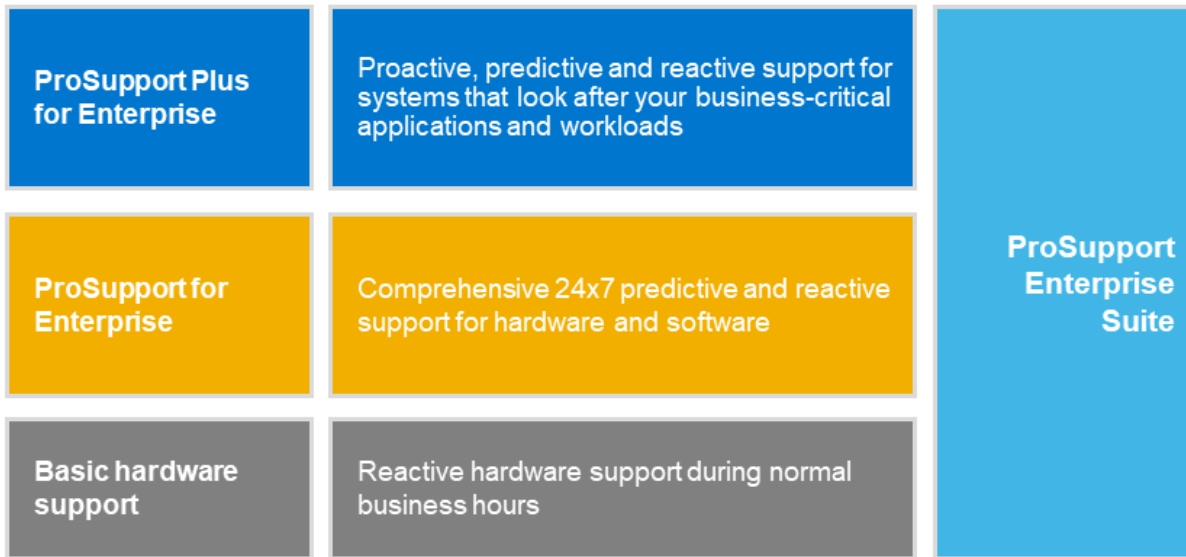


Figure 8. ProSupport Enterprise Suite

ProSupport Plus

When you purchase PowerEdge servers, we recommend ProSupport Plus, our proactive and preventative support, for business-critical systems. ProSupport Plus provides all the benefits of ProSupport, plus the following:

- An assigned Services Account Manager (SAM) who knows your business and your environment
- Access to senior ProSupport engineers for faster issue resolution
- Personalized, preventive recommendations based on analysis of support trends and best practices from across the Dell EMC customer base to reduce support issues and improve performance
- Predictive analysis for issue prevention and optimization enabled by SupportAssist
- Proactive monitoring, issue detection, notification and automated case creation for accelerated issue resolution enabled by SupportAssist
- On-demand reporting and analytics-based recommendations enabled by SupportAssist and TechDirect

ProSupport

Our ProSupport service offers highly trained experts around the clock and around the globe to address your IT needs. We will help you minimize disruptions and maximize availability of your PowerEdge server workloads with:

- 24x7x365 access to certified hardware and software experts
- Collaborative 3rd party support
- Hypervisor and OS support
- Consistent level of support available for Dell EMC hardware, software and solutions
- Onsite parts and labor response options including next business day or four-hour mission critical

ProSupport One for Data Center

ProSupport One for Data Center offers flexible site-wide support for large and distributed data centers with more than 1,000 assets. This offering is built on standard ProSupport components that leverage our global scale but are tailored to your

company's needs. While not for everyone, it offers a truly unique solution for Dell EMC's largest customers with the most complex environments.

- Team of assigned Services Account Managers (SAM) with remote, on-site options
- Assigned ProSupport One technical and field engineers who are trained on your environment and configurations
- On-demand reporting and analytics-based recommendations enabled by SupportAssist and TechDirect
- Flexible on-site support and parts options that fit your operational model
- A tailored support plan and training for your operations staff

Enterprise Support Services Feature Comparison

	ProSupport	ProSupport Plus	ProSupport One for Data Center
Remote technical support	24x7	24x7	24x7
Onsite support	Next business day or Mission Critical	Next business day or Mission Critical	Flexible
Automated issue detection and case creation	•	•	•
Self-service case initiation and management	•	•	•
Hypervisor, Operating Environment Software and OS support	•	•	•
Priority access to specialized support experts		•	•
Designated Technology Service Manager		•	•
Personalized assessments and recommendations		•	•
On-demand support and utilization reports		•	•
Systems Maintenance guidance		Semiannual	Optional
Designated technical and field support teams			•

Figure 9. ProSupport One for Data Center model

Support Technologies

Powering your support experience with predictive, data-driven technologies.

SupportAssist

The best time to solve a problem is before it happens. The automated proactive and predictive technology SupportAssist* helps reduce steps and time to resolution, often detecting issues before they become a crisis. Benefits include:

- Value - SupportAssist is available to all customers at no additional charge.
- Improve productivity - replace manual, high-effort routines with automated support.
- Accelerate time to resolution - receive issue alerts, automatic case creation and proactive contact from Dell EMC experts.
- Gain insight and control - optimize enterprise devices with on-demand ProSupport Plus reporting in TechDirect and get predictive issue detection before the problem starts.

SupportAssist is included with all support plans but features vary based on service level agreement.

	Basic Hardware Warranty	ProSupport	ProSupport Plus
Automated issue detection and system state information collection	•	•	•
Proactive, automated case creation and notification		•	•
Predictive issue detection for failure prevention			•
Recommendation reporting available on-demand in TechDirect			•

Figure 10. SupportAssist model

Get started at Dell.com/SupportAssist