

USER MANUAL



HEADLIGHT

Model.: WJ1020-0676B-GA


2009-2018 Dodge Ram 1500 2500 3500

Fits for stock Projector headlights


Fits for stock models with Quad or Dual headlights

REQUIRED TOOLS

Removal Tool



Flathead Screwdriver

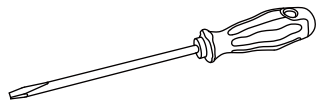

Ratchet & Socket




Installation Instructions

1. Pop out all rivets holding the radiator cover.



2

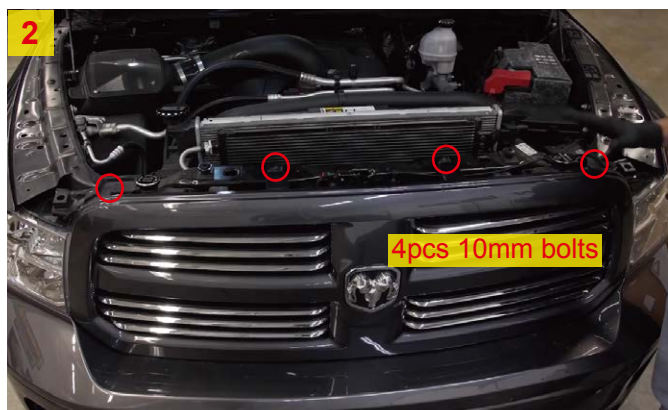


3. Remove the grille.




4. Pop out one rivet holding access panel.



5. Push the white tab up to release the light.

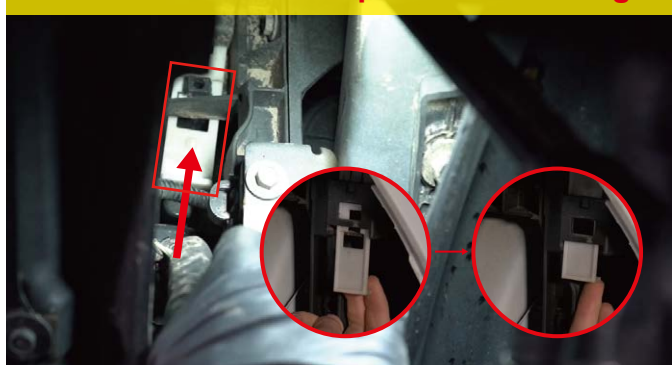

6

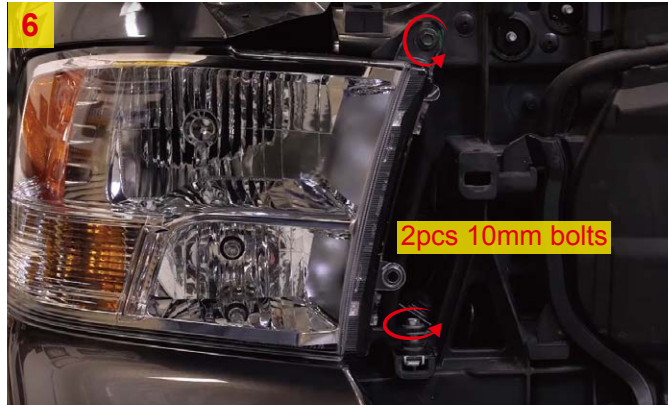


7. Slide out the headlight.



8. Disconnect the headlight plugs(only one main plug in projector style).




Skid These Steps Below with Stock Projector Style

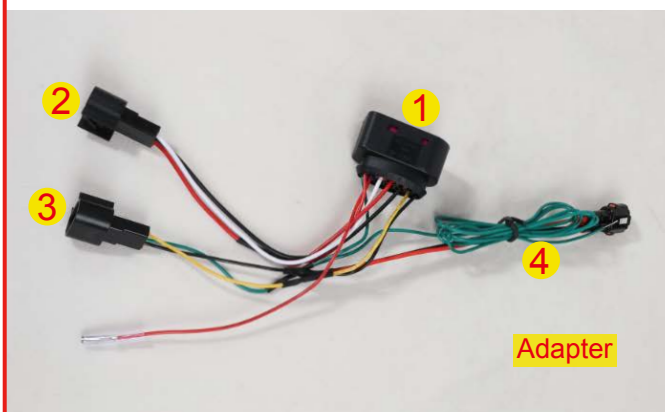

Connect the adapter with new headlight.



Plug the high beam and turn signal connectors.

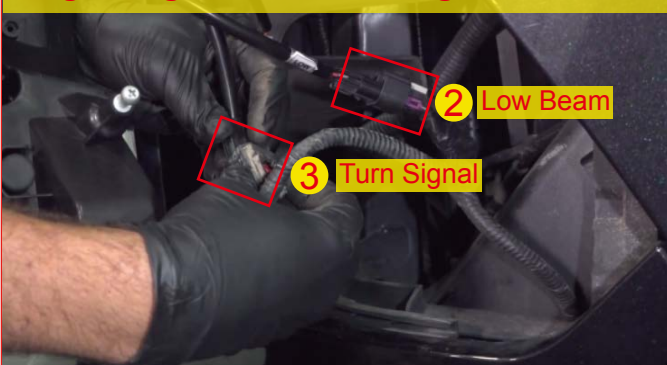

Connect the green wire to the positive of the battery.




9. Plug the headlight with factory connector.



10. Put the headlight on the car and secure it with factory 10mm bolts.



11. Push the white tab down to lock the light.

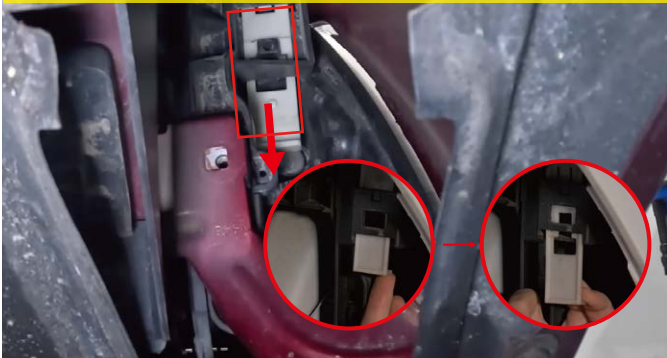

12. Reinstall the original removed nuts and parts.



Adjustment Steps



1. Use Phillips Head Screwdriver or 7mm Socket.



2. Clockwise=UP, Counterclockwise=DOWN.



3. Same steps for the other side.

