

USER MANUAL



TAIL LIGHTS

Model.: WJ2025-0706

2009-2014 Ford F-150 Styleside Model Only

REQUIRED TOOLS



Installation Instructions




3. Pull the taillight outward.



4. Disconnect all the plugs of original.



Grab either one of the black connectors and white connector on the truck and plug them in the connector of the new taillight.

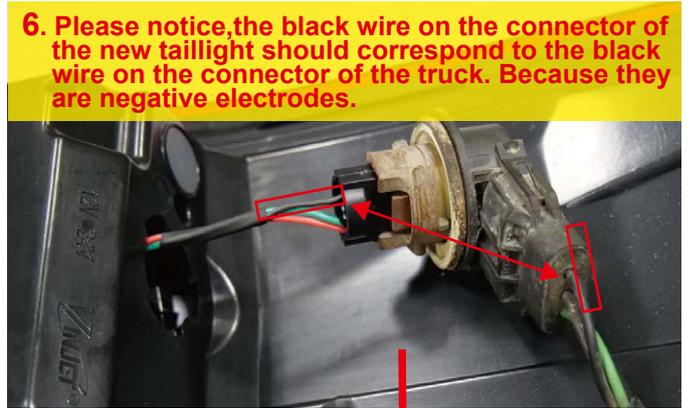

9. Place the resistor in a safe location in the housing, and connect the resistor. (First, use the 7.5HM resistor. If there is a flicker, please replace the 7.5HM resistor with the 4.0HM resistor.)



10. Push the taillight back into the truck.



11. Put your two bolts back in.



12. Repeat the steps 2~11 for the other side.

