


CIRRUS Double Pendant

coilandrft.com
studio@coilandrft.com
@coilandrft

COIL +
DRIFT

Installation Instructions

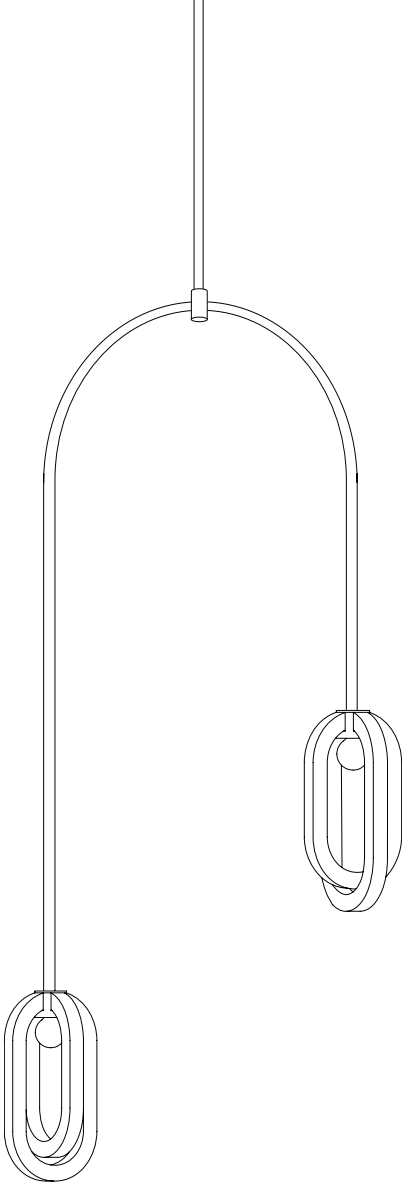


CIRRUS Double Pendant

Installation Instructions

coilandrft.com
studio@coilandrft.com
@coilandrft

COIL +
DRIFT

COMPONENTS:

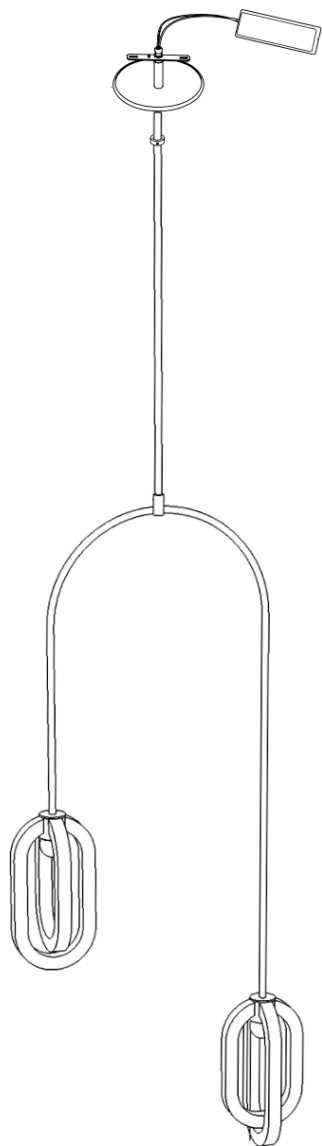

A: Crossbar (1)

B: Canopy (1)

C: Clamp (1)

D: Stem (1)

E: Bracket (1)

F: Disc (2)

G: Rings (2)

TOOLS REQUIRED:

+ Power drill
+ Drill bits

+ Allen key set
+ Painters tape

CIRRUS Double Pendant

Installation Instructions

coilanddrift.com
studio@coilanddrift.com
@coilanddrift

COIL +
DRIFT

BEFORE YOU BEGIN:

- + Always wear white cloth or latex gloves when handling the metal and glass.
- + Two people recommended for installation.


CAUTION: ELECTRIC SHOCK RISK:

- + Coil + Drift recommends this piece be installed by a qualified electrician only.
- + Disconnect power at junction box and turn off electrical power at breaker before beginning.

Having an issue? Call us at 917.664.4483

INSTALLING YOUR CIRRUS DOUBLE PENDANT:

1.
Feed wires from top of 'U'-shaped pipe through straight stem, inserting into the threaded end of the stem without the canopy.
2.
Screw the threaded end of the stem into the bracket at the top of the 'U'-shaped pipe.
3.
Loosen clamp with Allen key and slide clamp and canopy down. Be careful not to scratch metal.
4.
Mount Crossbar to Junction Box.
5.
Wire individual leads to line power in Junction box.
6.
Slide clamp and canopy back up to cover Junction box. Tighten clamp with Allen key.
7.
Install light bulbs.

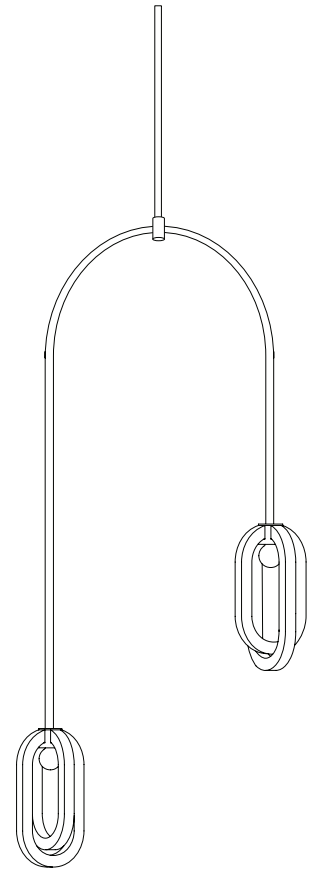

CIRRUS Double Pendant

Installation Instructions

coilanddrift.com
studio@coilanddrift.com
@coilanddrift

COIL +
DRIFT

INSTALLING YOUR CIRRUS DOUBLE PENDANT:

8.
Slide up disc on lighting assembly and place blue tape under disc to hold in place.
9.
Take ring 1 (longer ring) Place ring in any opposing pair of slots.
10.
Move ring 2 (shorter ring) through left side of ring 1, and place ring 2 in the other slot.
11.
Step back and make sure outside edges of rings are vertical. Take off tape and slide disc back down onto lighting assembly. Repeat for each pendant.

