


CIRRUS Sconce

Installation Instructions

coilanddrift.com
studio@coilanddrift.com
@coilanddrift

COIL +
DRIFT

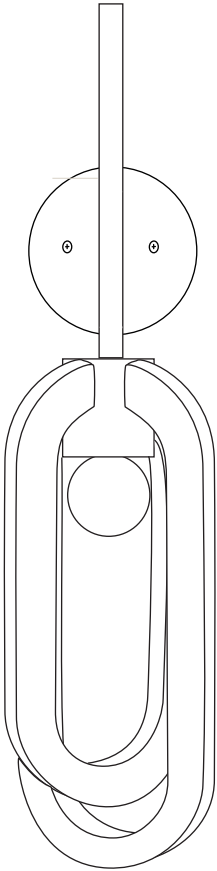


CIRRUS Sconce

coilanddrift.com
studio@coilanddrift.com
@coilanddrift

COIL +
DRIFT

Installation Instructions

COMPONENTS:

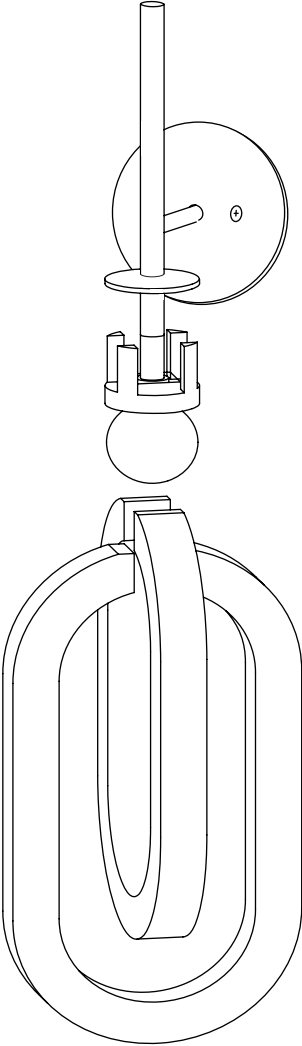

A: Backplate (1)

B: Lighting Assembly (1)

C: Bulb (1)

D: Rings (2)

TOOLS REQUIRED:

- + Power drill
- + Drill bits
- + Allen key set
- + Painters tape

CIRRUS Sconce

Installation Instructions

coilanddrift.com
studio@coilanddrift.com
@coilanddrift

COIL +
DRIFT

BEFORE YOU BEGIN:

+ Always wear white cloth or latex gloves when handling the metal and glass.

CAUTION: ELECTRIC SHOCK RISK:

+ Coil + Drift recommends this piece be installed by a qualified electrician only.

+ Disconnect power at junction box and turn off electrical power at breaker before beginning.

Having an issue? Call us at 917.664.4483

INSTALLING YOUR CIRRUS SCONCE:

1. Wire individual leads to line power inside the junction box.
2. Screw backplate into junction box.
3. Slide up backplate on lighting assembly and place blue tape under backplate to hold in place.
4. Take ring 1 (longer ring). Place ring in any opposing pair of slots.
5. Move ring 2 (shorter ring) through left side of ring 1, and place ring 2 in the other slot.
6. Step back and ensure outside edges of the rings are vertical. Take off tape and slide backplate back down on to lighting assembly.
7. Locate the light bulb and screw it into the socket.

