


Data Sheet

Beveled Strips

**The
Quiet
Room**

acoustic solutions

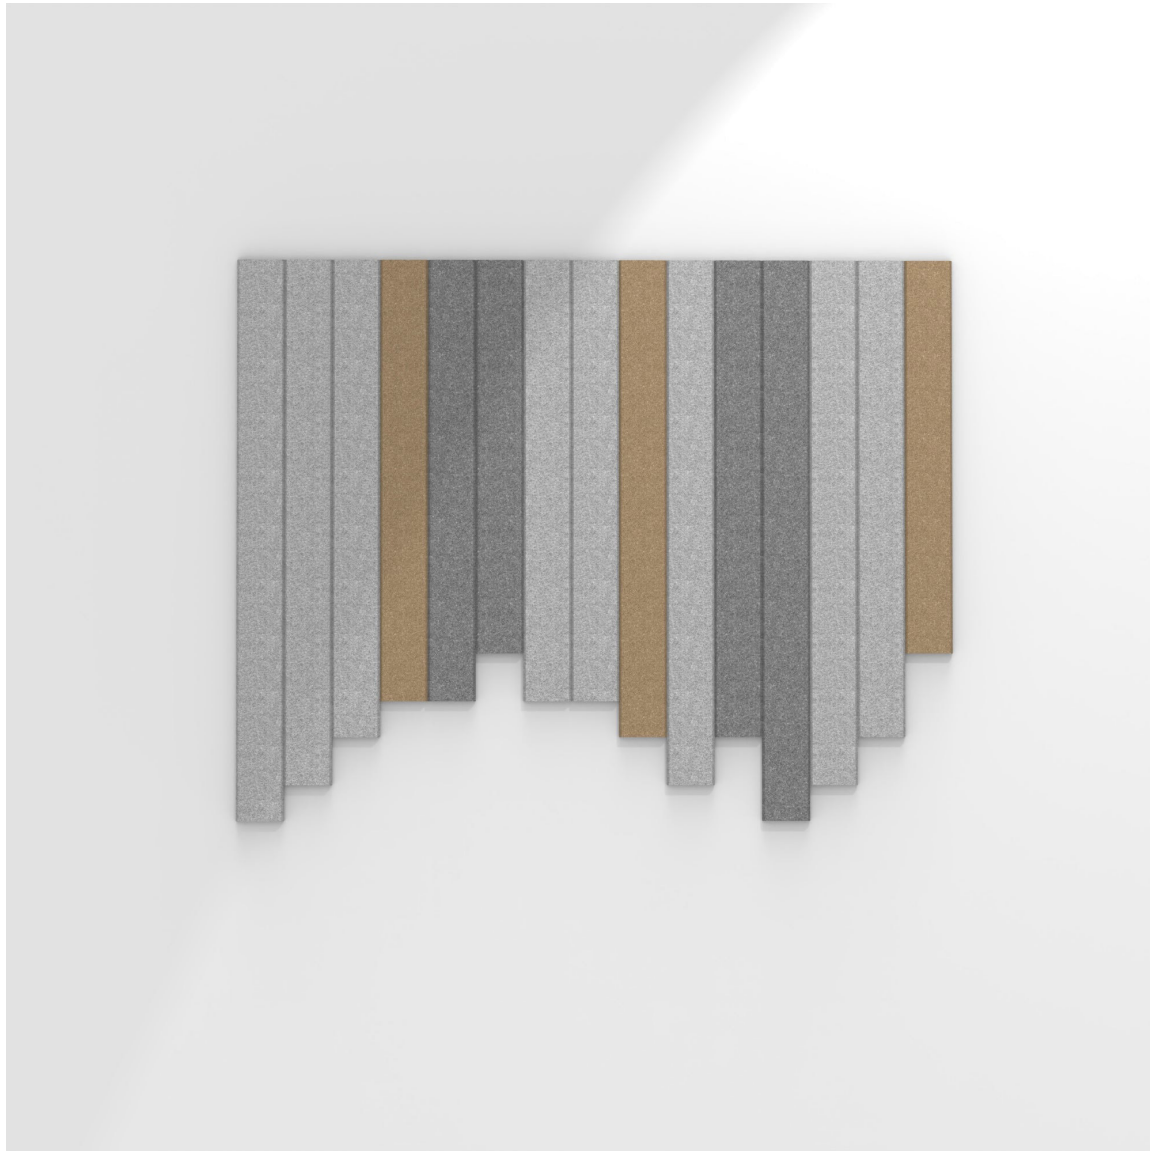

Specifications

Application Surface	Wall
Material	Acoustic felt P.E.T. 12mm, ½ lb per sqft (±6%)
Standard Sizes	Length: 47" Width: 2", 3" or 4"
Custom Sizes	Available, see the next page on how to specify.

Environmental

Recycled Content	Minimum 60%
Recyclability	100% at participating facilities

Details

Standard Lead Time	3 weeks to ship
Origin	Manufactured in Canada
Warranty*	5 years limited



*: See *TheQuietRoom Care Guide & Warranty* for details.

Technical

NRC Rating*	0.40
Fire Test*	ASTM E84: Class A Flame spread index: 10 Smoke developed index: 250 CAN/ULC S102 Flame spread classification: 15 Smoke developed classification: 210

*: Full reports available upon request.

SOUND ABSORPTION REPORT
Acoustical Baffles, felt (9 units in 4 rows spaced 30 in. on center)

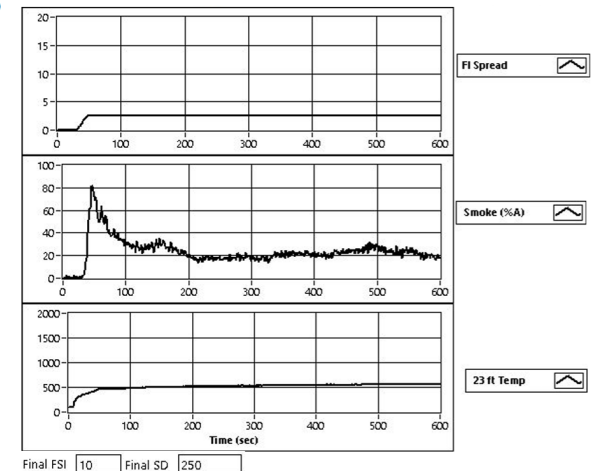
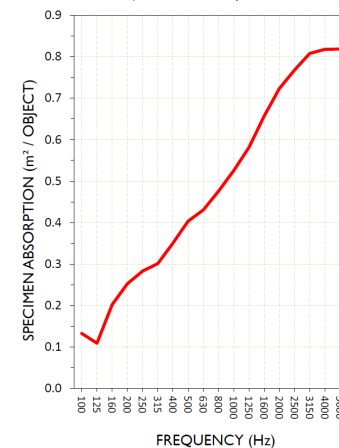


Standard Sizes

Specify Custom Sizes

Length	47"
Width	2", 3" or 4"
Material Thickness	12mm/0.47" (±6%)

Max Length	107"
Max Width	47"
Material Thickness is not customizable at this time.	

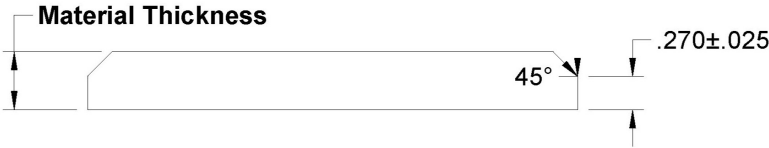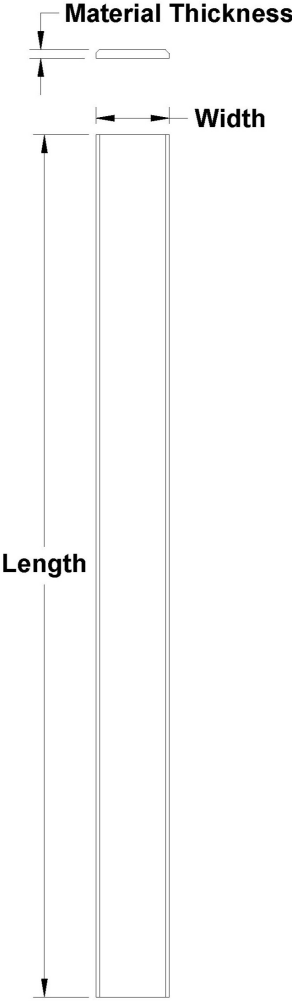

Finish Options

For printed felt, see *TheQuietRoom Print Options* (separate document from this data sheet).

Standard Felt Colors

3 week lead time, order online



Special Order Felt Colors

12 week lead time, order via email inquiry



Installation

Use construction adhesive such as LePage No More Nails.

Apply adhesive to the back of strip, along the perimeter and in the center. Ensure adhesive coverage every 3".

Hold strip firmly against wall for 60 seconds or until it stays in place.