

DEVON[®]

CATALOGUE





DEVON 大有

PROFESSIONAL POWER TOOL BRAND OF CHERVON

- **The Largest Power Tool Manufacturer from China**

Three manufacturing bases with more than 10-million-unit power tool production capacity

- **An Innovation-driven Company**

Over 600 R&D engineers and 100 ID engineers from China, Germany, France, America and Japan, more than 2200 patents worldwide

- **Built Ergonomically with Craftsmanship Design**

Tailored for industrial & professional applications

- **High Quality Standard**

Strict observance to international standards ensures high quality, performance and safety

- **Wide Sales Network**

With Over 3000 dealers all around China, DEVON is also famous in many countries

- **Made by CHERVON, Quality Ensured**

INNOVATIONS



Energy Mangement System BMS

Leading System of Equipment Electronics in the industry

Intelligence constantly monitors this internal network and maintains ideal conditions

Temperature protection
Honeycomb design, large area heat dissipation

Short circuit protection
Prevent fire, explosion and water

BMS intelligent management system
Accurate voltage collection ensures safe use



Brushless Motor Technology

DEVON's Brushless motors efficiently convert energy into power and output torque, which is more in line with the needs of industrial users.

Engineered Uniquely for the Demands of Each Piece of Equipment

Optimized for the Perfect Combination of Performance, Portability and Productivity

High application speed, torque and durability

Low noise and cool rapidly to deliver years of maintenance free performance



Circular Saw

Innovative in-line structure, both right and left hand can operate, cutting more smoothly (Patent No.CN209477418U; CN109909548A; PCT/CN2018/120769);

High-performance brushless external rotor motor provides more powerful;

Belt drive, easy to cope with heavy duty, no blocking rotation;



Rotary Hammer

Safety clutch system to protect users;

Automatic stop when drilling concrete reinforcement, effectively protecting users twist from sprain;



Impact Wrench

Innovative all-aluminum body impact wrench;

Vibration damping design for more comfortable operation (Patent No.ZL201821011173.3);

Innovative all-in-one cylinder design for compact and durable (Patent No.202111198520.4) ;



Drill/Impact Drill

Innovative angle induction protection technology, both for tools and users;

Protect tools avoid over-loading;

Automatic stop immediately, while the abnormal operation injected by the intelligent induction machine;

POWER IN YOUR HANDS



CONTENTS

PROFESSIONAL LITHIUM-ION TOOLS

20V INDUSTRIAL SERIES 6

4V&12V INDUSTRIAL SERIES 54

INDUSTRIAL POWER TOOLS

STRAIGHT GRINDER 59

ANGLE GRINDER 60

DRILL/IMPACT DRILL 66

ROTARY HAMMER/DEMOLITION HAMMER 68

MARBLE CUTTER 69

CUT-OFF SAW/CIRCULAR SAW/RECIPROCATING SAW/JIG SAW 71

SANDER 74

ROUTER/HOT AIR GUN/BLOWER/DRY WALL GRINDER 76

LASER MEASURING TOOLS

DIGITAL LEVELER/ ANGLE MEASURER 78

ACCESSORIES 79

ABOUT CHERVON 92

BATTERY



25% LONGER RUNTIME

State-of-the-art THERMA-TECH™ material prevents overheating and promotes longer runtime

*8.0Ah battery only



50% FASTER CHARGING

Industry-leading recharge times get you back to work in as little as 30 minutes



100% CROSS-COMPATIBLE

Operates with all FLEX 24V tools and chargers




DROP, DUST, AND WATER RESISTANT

Engineered with a shock-resistant design and sealed electronics



POWER IQ

Intelligent power management discharges at a higher output to extend performance

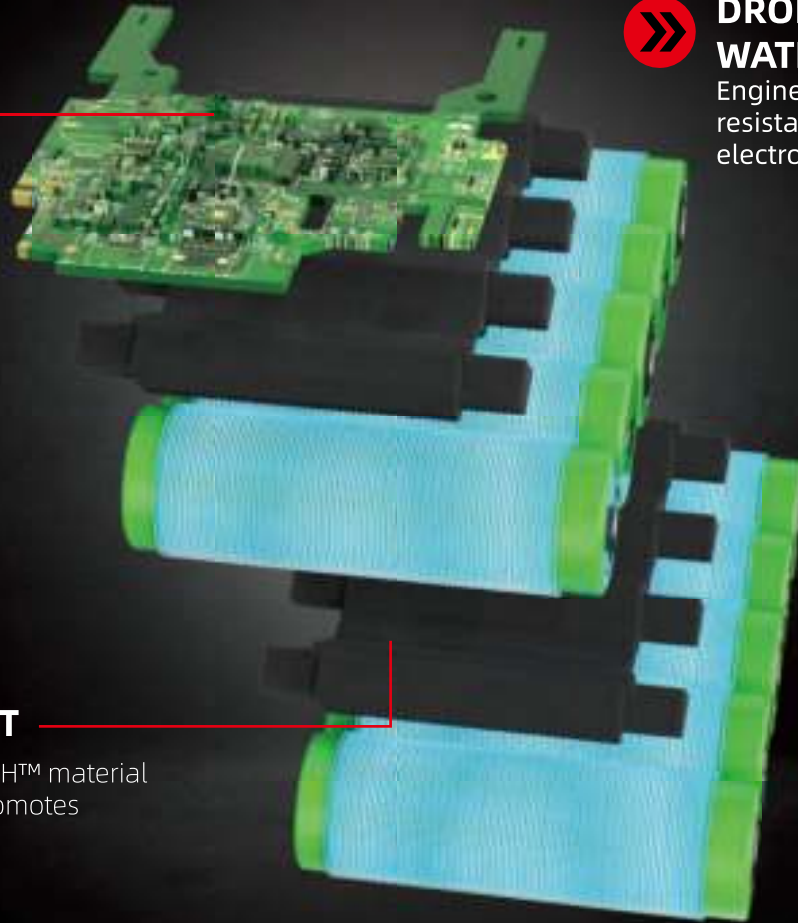

THERMA-TECH™ HEAT MANAGEMENT

State-of-the-art THERMA-TECH™ material prevents overheating and promotes longer runtime

*8.0Ah battery only

20V BATTERY

5150-Li-20-20 20V Battery
· 2.0Ah

5150-Li-20-25 20V Battery
· 2.5Ah

5150-Li-20-40 20V Battery
· 4.0Ah

5150-Li-20-50 20V Battery
· 5.0Ah

5150-Li-20-80 20V Battery
· 8.0Ah



Battery Capacity (Ah)	2.0
Battery Power (W·h)	40
Weight (kg)	0.40

Battery Capacity (Ah)	2.5
Battery Power (W·h)	50
Weight (kg)	0.40

Battery Capacity (Ah)	4.0
Battery Power (W·h)	80
Weight (kg)	0.68

Battery Capacity (Ah)	5.0
Battery Power (W·h)	100
Weight (kg)	0.68

Battery Capacity (Ah)	8.0
Battery Power (W·h)	160
Weight (kg)	1.13

CHARGER



SMART CHARGE GAUGE

Indicator lights show charging levels for efficient use and easier recharging



TWIN FAN TECHNOLOGY

Two integrated fans keep charger and battery cool to prevent overheating and provide longer life



CHARGE IQ

Built-in intelligent processor optimizes power flow for accelerated charge time

BATTERY CHARGING TIMES

	190W	75W	60W	40W
2.0Ah	45 min	45 min	60 min	90 min
2.5Ah	45 min	60 min	70 min	110 min
4.0Ah	45 min	90 min	120 min	180 min
5.0Ah	45 min	120 min	140 min	220 min
8.0Ah	70 min	180 min	210 min	300 min

20V CHARGER

5339-Li-20F 20V Charger

- 190W charger
- Cooling system
- LED display screen
- Display charging time



5340-Li-20R 20V Charger

- 75W charger



5350-Li-20 20V Charger

- 60W charger
- Double-head charger



5378-Li-20 20V Charger

- 40W charger



Voltage Output (V)	1 $\frac{1}{2}$ 0
Power Input (W)	190
Chargeable Temperature Range (°C)	+5~+40
Weight (kg)	0.89

Voltage Output (V)	20
Power Input (W)	75
Chargeable Temperature Range (°C)	+5~+40
Weight (kg)	0.52

Voltage Output (V)	20
Power Input (W)	60
Chargeable Temperature Range (°C)	+5~+40
Weight (kg)	0.47

Voltage Output (V)	20
Power Input (W)	40
Chargeable Temperature Range (°C)	+5~+40
Weight (kg)	0.25

4-stage Mechanical Speed
Suitable for different working conditions

Torque Setting
Used for different screws driving and drill situation

Brushless Motor
High torque and high efficiency

Extensible Aux Handle
Reducing the reverse torque

LED Work Light
Light the working surface to provide much more convenience

20V BRUSHLESS DRILL DRIVER WITH 4-STAGE SPEED



EXTENSIBLE AUX HANDLE



**QUICK-ACTION
KEYLESS CHUCK**



**FASTER WORKING
FOR CHANGING
APPLICATIONS**



BRIGHTER LIGHT

20V BRUSHLESS HIGH TORQUE DRILL DRIVER

Conquer demanding drilling applications with power, performance, and versatility. This powerful 20V Brushless Drill Driver packs 160Nm of torque with exceptional runtime. Tough construction makes for ultimate durability, keeping you equipped for the long haul. Built-in LED lighting assists in dark spaces. This drill driver also delivers the DEVON Advantage of unmatched battery power, runtime, and faster charging.

INDUSTRY



	5201-LI-20 20V DRILL DRIVER	5282-LI-20TS 20V DRILL DRIVER	5289-LI-20FS 20V DRILL DRIVER
Maximum Chuck Diameter (mm)	13	13	13
No-load Speed (rpm)	LOW 0-550 HIGH 0-2000	LOW 0-600 HIGH 0-2300	I: 0-460 II: 0-910 III: 0-2100 IV: 0-4200
No-load Speed (rpm) (turbo)	LOW 0-700 HIGH 0-2500	/	/
Maximum Drilling Diameter (mm)	STEEL 13 WOOD 60	STEEL 13 WOOD 38	STEEL 13 WOOD 60
Maximum Torque (N·m)	70/160	55/120	55/120
Weight (kg)	1.68 (WITHOUT BATTERY)	1.4 (WITHOUT BATTERY)	1.5 (WITHOUT BATTERY)
Feature	PERFORMANCE TURBO FUNCTION E-CLUTCH KICK-BACK CONTROL	PERFORMANCE	PERFORMANCE 4-SPEED GEAR BOX E-TORQUE QUICK CLAMPIN CHUCK

BETTER TOOLS EASIER WORK



20V BRUSHLESS HIGH TORQUE DRILL DRIVER

Conquer demanding drilling applications with power, performance, and versatility. This powerful 20V Brushless Drill Driver packs 160Nm. of torque with exceptional runtime. Tough construction makes for ultimate durability, keeping you equipped for the long haul. Built-in LED lighting assists in dark spaces. This drill driver also delivers the DEVON Advantage of unmatched battery power, runtime, and faster charging.



	5203-LI-20 20V DRILL DRIVER	5210-LI-20 20V DRILL DRIVER	5298-LI-20TS 20V DRILL DRIVER
Maximum Chuck Diameter (mm)	13	13	13
No-load Speed (rpm)	LOW 0-500 HIGH 0-1800	LOW 0-500 HIGH 0-1800	LOW 0-500 HIGH 0-1900
Maximum Drilling Diameter (mm)	STEEL 13 WOOD 52	STEEL 13 WOOD 32	STEEL 13 WOOD 32
Maximum Torque (N·m)	45/90	27/55	25/50
Weight (kg)	1.2 (WITHOUT BATTERY)	0.95 (WITHOUT BATTERY)	0.95 (WITHOUT BATTERY)
Feature	BALANCE OF COMPACT SIZE & PERFORMANCE	COMPACT SIZE	COMPACT SIZE

Torque Setting

Used for different screws driving and drill situation

2-speed Gear Box

Provides high speed for fast drilling or high torque for powerful driving

Hammer Drill mode selection

TURBO Mode

Increased speed, higher efficiency

Brushless Motor

Strong power and improve efficiency greatly 160Nm

All Rubber Protection

Rubber protection design, protect the tool from drop and instant impact

LED Work Light

An integrated LED can light the working surface to provide much more convenience

20V BRUSHLESS IMPACT DRILL WITH TURBO FUNCTION

BRIGHTER LIGHT

TURBO MODE

HAMMER FUNCTION

SUPER TORQUE

20V BRUSHLESS IMPACT DRILL

WITH TURBO FUNCTION

The DEVON 20V Brushless 2-Speed Impact Drill Driver with Turbo Mode delivers industry-leading torque. This unrivaled power is matched with tough construction for ultimate durability. This drill's exceptional runtime is backed by the DEVON Advantage of unmatched battery power, runtime, and charging speed, making it unstoppable.

INDUSTRY



INDUSTRY



INDUSTRY



	5202-LI-20 20V DRILL DRIVER	5283-LI-20TS 20V DRILL DRIVER	5205-LI-20FS 20V DRILL DRIVER	5211-LI-20 20V DRILL DRIVER
Maximum Chuck Diameter (mm)	13	13	13	13
No-load Speed (rpm)	LOW 0-550 HIGH 0-2000	LOW 0-600 HIGH 0-2300	LOW 0-500 HIGH 0-1800	LOW 0-500 HIGH 0-1800
No-load Speed (rpm) (turbo)	LOW 0-700 HIGH 0-2500	/	/	/
Impact Rate (ipm)	LOW 0-8800 HIGH 0-32000	LOW 0-8000 HIGH 0-32000	LOW 0-8000 HIGH 0-28800	LOW 0-8000 HIGH 0-28800
Impact Rate (ipm) (turbo)	LOW 0-11200 HIGH 0-40000	/	/	/
Maximum Drilling Diameter (mm)	STEEL 13 WOOD 60 STONE 16	STEEL 13 WOOD 38 STONE 13	STEEL 13 WOOD 52 STONE 13	STEEL 13 WOOD 32 STONE 10
Maximum Torque (N·m)	70/160	55/120	45/90	27/55
Weight (kg)	1.68(WITHOUT BATTERY)	1.4 (WITHOUT BATTERY)	1.2 (WITHOUT BATTERY)	0.95 (WITHOUT BATTERY)
Feature	PERFORMANCE TURBO FUNCTION E-CLUTCH KICK-BACK CONTROL	PERFORMANCE	BALANCE OF COMPACT SIZE & PERFORMANCE	

Screw Length Locator
Meet the different needs
of users

Quick Change Magazine
Convenient and efficient

Brushless Motor
Strong power and
improve efficiency
greatly

Big Trigger Switch
Comfortable
operation

Led Work Light
An integrated LED can light the
working surface to provide much
more convenience



20V BRUSHLESS DRYWALL SCREW GUN

BIG TRIGGER SWITCH

COMFORTABLE GRIP

QUICK CHANGE SYSTEM

20V BRUSHLESS DRYWALL SCREW GUN

This lightweight screw gun arms you with the ultimate in speed and efficiency. Lock-on mode delivers continuous power to secure drywall panels. Setup is easy with tool-free adjustments. The bright, built-in LED light illuminates dark spaces. All this performance is built on the DEVON Advantage of unmatched battery power, runtime, and fast charging.



5615-LI-20 20V DRYWALL SCREW GUN

Maximum Chuck Diameter (mm)	6.35 (1/4")
No-load Speed (rpm)	0-4500
Maximum Torque (N·m)	6/28
Weight (kg)	0.98 (WITHOUT BATTERY)

Quick-Connect Collet
For easy bit change

Brushless Motor
Improve efficiency greatly

Vibration Damping Design
Comfortable operation

Function Selection Button
Meet the different needs of users

Led Work Light
An integrated LED can light the working surface to provide much more convenience

20V BRUSHLESS IMPACT WRENCH



DURABLE OUTPUT SHAFT



INNOVATIVE ANTI-VIBRATION SYSTEM



SUPER TORQUE



ADJUSTABLE TORQUE

20V BRUSHLESS HIGH TORQUE IMPACT WRENCH

The DEVON 20V Brushless High Torque Impact Wrench delivers 1300Nm. of unrelenting torque. Take control with three adaptable speed modes and do it comfortably with vibration suppression. Activate Removal Mode for extra control to extract lug nuts quickly, safely, and efficiently. Built-in LED lighting illuminates your work area. This impact wrench dominates with the DEVON Advantage: unmatched battery power, runtime, and fast-charging speed to keep you going.



	5758-LI-20 20V IMPACT WRENCH	5759-LI-20 20V IMPACT WRENCH
Chuck Diameter (mm)	19.05 (3/4")	12.7(1/2")
Bolt Diameter (mm)	M16-M30	M14-M24
No-load Speed (rpm)	0-900/1000/1700	0-450/1300/2400/2400
Impact Rate (ipm)	0-1800/2000/2200	0-900/1700/2700/2700
Maximum Torque (N·m)	1300(FORWARD)/1900(REVERSE)	850(FORWARD)1000(REVERSE)
Weight (kg)	3.4 (WITHOUT BATTERY)	1.9 (WITHOUT BATTERY)
Feature	SUPER TORQUE SHORT ANTI-VIBRATION HANDLE	COMPACT SIZE ALUMINUM HOUSING ANTI-VIBRATION HANDLE



½" High Strength output shaft, long life

Brushless Motor
Improve efficiency greatly

Slim Handle For Comfortable Grip

Work Light

An integrated LED can light the working surface to provide much more convenience

Function Selection Button

Meet the different needs of users

20V BRUSHLESS IMPACT WRENCH



DURABLE OUTPUT SHAFT



MULTIPLE OPERATING MODES



HIGH IMPACT FREQUENCY



SLIM HANDLE & COMPACT

20V BRUSHLESS HIGH TORQUE IMPACT WRENCH

The DEVON 20V Brushless High Torque Impact Wrench delivers 1300Nm. of unrelenting torque. Take control with three adaptable speed modes and do it comfortably with vibration suppression. Activate Removal Mode for extra control to extract lug nuts quickly, safely, and efficiently. Built-in LED lighting illuminates your work area. This impact wrench dominates with the DEVON Advantage: unmatched battery power, runtime, and fast-charging speed to keep you going.



	5733-LI-20SS PLUS 20V IMPACT WRENCH	5733-LI-20S2 PLUS 20V IMPACT WRENCH	5760-LI-20 20V IMPACT WRENCH	5733-LI-20S2 20V IMPACT WRENCH
Chuck Diameter (mm)	12.7(1/2")	12.7(1/2")	12.7 (1/2")	12.7(1/2")
Bolt Diameter (mm)	M10-M20	M10-M20	M10-M20	M10-M20
No-load Speed (rpm)	0-2800	0-2800	0-1700/3000/3000	0-2500
Impact Rate (ipm)	0-3500	0-3500	0-3500/4200/4200	0-3300
Maximum Torque (N-m)	350(FORWARD)/350(REVERSE)	350(FORWARD)/350(REVERSE)	330(FORWARD)/400(REVERSE)	310(FORWARD)/310(REVERSE)
Weight (kg)	1.1 (WITHOUT BATTERY)	1.1 (WITHOUT BATTERY)	1.0 (WITHOUT BATTERY)	1.1 (WITHOUT BATTERY)
Feature	HIGH TORQUE	HIGH TORQUE	COMPACT SIZE HIGH IMPACT FREQUENCY AUTO STOP	HIGH TORQUE



**One Hand Quick
Change Collet**
Easy to operate

Brushless Motor
Improve efficiency
greatly

High Quality Switch
Longer life

Function Selection Button
Meet the different needs of
users

20V BRUSHLESS IMPACT WRENCH



**QUICK CHANGE
SYSTEM**



**HIGH QUALITY
SWITCH**



**HIGH IMPACT
FREQUENCY**



**MULTIPLE OPERATING
MODES**

20V BRUSHLESS HEX IMPACT DRIVER

Dominate the toughest fastening applications with the unrivaled power and control of DEVON 20V Brushless Hex Impact Driver. This impact delivers 200Nm. of unrelenting torque, so you can power through lag bolt after lag bolt. Its compact and lightweight design keeps you ready for what's next. Built-in LED lighting keeps you on the mark. Plus, this driver delivers the DEVON Advantage of unmatched battery power, runtime, and charging speed.



	5762-LI-20H 20V IMPACT WRENCH	5733-LI-20H 20V IMPACT WRENCH
Chuck Diameter (mm)	6.35 (1/4")	6.35 (1/4")
Bolt Diameter (mm)	M5-M18	M6-M14
No-load Speed (rpm)	0-3700	0-2500
Impact Rate (ipm)	0-4200	0-3300
Maximum Torque (N-m)	240 (FORWARD)/240 (REVERSE)	200 (FORWARD)/200 (REVERSE)
Weight (kg)	1.2 (WITHOUT BATTERY)	1.1 (WITHOUT BATTERY)
Feature	COMPACT SIZE HIGH IMPACT FREQUENCY AUTO STOP	COMPACT SIZE



Four-Function For More Versatility

Brushless Motor
Improve efficiency greatly

Soft Grip Handle
Provides increased comfort and grip

Professional SDS
High precision, more accurate positioning

Auxiliary Handle
Comfortable operation

20V BRUSHLESS ROTARY HAMMER



ERGONOMIC DESIGN



MULTIFUNCTION KNOB



SLIM HANDLE & COMPACT



ANTI-VIBRATION DESIGN

20V BRUSHLESS SDS PLUS ROTARY HAMMER

DEVON 20V Brushless SDS Plus Rotary Hammers are built for performance. Drill confidently with constant speed control, built-in LED lighting and vibration suppression. Adapt to every task with four modes under your command, including drilling, hammer drilling, chiseling, and chisel adjustment. All this, built with the DEVON Advantage of unmatched DEVON 20V battery power, runtime, and fast charging.

INDUSTRY

INDUSTRY

INDUSTRY



	5402-LI-20RH26 ROTARY HAMMER	5402-LI-20RH26Q ROTARY HAMMER	5401-LI-20RH 20V ROTARY HAMMER	5403-LI-20 ROTARY HAMMER
No-load Speed (rpm)	0-980	0-980	0-1400	0-810
Impact Rate (ipm)	0-4350	0-4350	0-4500	0-4500
Impact Energy (J)	2.6	2.6	1.7	1.5
Maximum Drilling Diameter (mm)	CONCRETE 26 STEEL 13 WOOD 30	CONCRETE 26 STEEL 13 WOOD 30	CONCRETE 22 STEEL 13 WOOD 28	CONCRETE 18 STEEL 8 WOOD 13
Optimum Drilling Range (mm)	6-16	6-16	6-12	6-8
Chuck Type	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS
Weight (kg)	2.8 (WITHOUT BATTERY)	2.9 (WITHOUT BATTERY)	2.1 (WITHOUT BATTERY)	1.3(WITHOUT BATTERY)
Remarks	DRILLING, HAMMER DRILLING, CHISELING, ADJUSTMENT	DRILLING, HAMMER DRILLING, CHISELING, ADJUSTMENT, QUICK CHANGE CHUCK	DRILLING, HAMMER DRILLING, CHISELING, ADJUSTMENT	DRILLING, HAMMER DRILLING
Feature	ANTI-VIBRATION HANDLE ELECTRONIC AND MECHANICAL SAFETY CLUTCH	ANTI-VIBRATION HANDLE ELECTRONIC AND MECHANICAL SAFETY CLUTCH QUICK CLAMPING CHUCK	HIGH EFFICIENCY E-CLUTCH	COMPACT SIZE E-CLUTCH ANTI-VIBRATION HANDLE

Optimized dustproof air path, Enhanced motor cooling system

High efficiency with BL motor

Ergonomic compact grip housing design, use comfortable



Compact gear housing, convenient for narrow area work

Multi-functional guard, meet the demand of different working conditions

20V BRUSHLESS ANGLE GRINDER UNMATCHABLE POWER



REMOVABLE DUST FILTER



SLIM DESIGN

20V BRUSHLESS ANGLE GRINDER

The DEVON 20V Brushless Angle Grinder delivers next-level advantages to the jobsite. Unleash up to 10,000 RPM of unmatched power but also work with confidence and control. Key safety features include soft start, restart protection and overload protection. Slim tool body for comfortable grip. Efficient brushless motor provides more power.



	2906-LI-20-100 20V ANGLE GRINDER	2906-LI-20-125 20V ANGLE GRINDER	2903-LI-20-100 20V ANGLE GRINDER	2903-LI-20-125 20V ANGLE GRINDER	2905-LI-20 20V ANGLE GRINDER
No-load Speed (rpm)	10000	10000	9000	9000	3500-9000
Spindle Diameter	M10	M14	M10	M14	M14
Wheel Diameter (mm)	100	125	100	125	125
Weight (kg)	1.45 (WITHOUT BATTERY)	1.58 (WITHOUT BATTERY)	1.6(WITHOUT BATTERY)	1.7 (WITHOUT BATTERY)	1.85 (WITHOUT BATTERY)
Feature	SOFT START CONSTANT SPEED OVERLOAD PROTECTION ANTI-KICKBACK POWER-OFF PROTECTION SLIM HANDLE DESIGN HIGH SPEED	SOFT START CONSTANT SPEED OVERLOAD PROTECTION ANTI-KICKBACK POWER-OFF PROTECTION SLIM HANDLE DESIGN HIGH SPEED	SOFT START OVERLOAD PROTECTION ANTI-KICKBACK	SOFT START OVERLOAD PROTECTION ANTI-KICKBACK	SOFT START CONSTANT SPEED OVERLOAD PROTECTION ANTI-KICKBACK POWER-OFF PROTECTION ADJUSTABLE SPEED

Lightweight body,
convenient and easy
to carry

Innovative In-Line Structure Design
Dual Led Working Lights
Fast adjustable dust outlet
Full depth

Dust outlet with
adjustable direction
Keep the working
surface clean

Slim Handle For
comfortable grip



Brushless Motor
Provide strong
cutting power

Dual LED working lights
provide brighter and
larger lighting range

20V BRUSHLESS CIRCULAR SAW



**INNOVATIVE IN-LINE
STRUCTURE DESIGN**



**DUAL LED
WORKING LIGHTS**



**FAST ADJUSTABLE
DUST OUTLET**



FULL DEPTH

20V BRUSHLESS CIRCULAR SAW

Both lightweight and durable, this DEVON 20V brushless circular saw positioning the blade to the left of the motor and placing the handle at the rear to optimize line of sight. Built for advanced cutting performance and ultimate cutting capacity (up to 52.5mm). Built-in LED light illuminates workpiece providing superior precision and accurate cuts. Also delivers the DEVON Advantage of unmatched battery power, runtime, and faster charging.

INDUSTRY



INDUSTRY



INDUSTRY



	5419-LI-20CS185 20V CIRCULAR SAW	5419-LI-20CS165 20V CIRCULAR SAW	5835-LI-20 20V CIRCULAR SAW	5833-LI-20 20V CIRCULAR SAW
No-load Speed (rpm)	5200	5200	6300	6000
Cutting Blade Diameter (mm)	185	165	140	128
Cutting Blade Bore Diameter (mm)	20	20	20	20
Cutting Angle Range (°)	0-56	0-50	/	/
Maximum Cutting Depth (mm)	62	62	52.5	46.5
Weight (kg)	3.4 (WITHOUT BATTERY)	3.4 (WITHOUT BATTERY)	1.6 (WITHOUT BATTERY)	2.3 (WITHOUT BATTERY)
Feature	OUTER ROTOR	OUTER ROTOR	PATENT IN-LINE SAW LIGHT WEIGHT DEEP CUTTING CAPACITY LONG RUNNING TIME	PATENT IN-LINE SAW BELT DRIVE OUTER ROTOR

Counter balance gear
boxfull balance system
for unmatched
comfort and control

Tool-Less Blade
change for quick and
easy blade changes

Brushless Motor
Improved efficiency

Variable Speed Trigger
Suitable for more working
conditions

Led Work Light
Auxiliary lighting, easy
cutting

20V BRUSHLESS RECIPROCATING SAW



**ANTI- VIBRATION
DESIGN**



BUILT IN LED LIGHT



SLIM, LIGHTWEIGHT



**COMPACT
ONE-HANDED**

20V BRUSHLESS RECIPROCATING SAW

This reciprocating saw achieves ultra-low vibration through excellent structural design. Constant speed control and six speed Settings can meet the needs of more complex working conditions. Anti-recoil function effectively protects user safety.

INDUSTRY



	5827-LI-20QCV 20V RECIPROCATING SAW	5836-LI-20 20V RECIPROCATING SAW	5830-LI-20 20V RECIPROCATING SAW
Reciprocating Stroke (mm)	32	32	25.4
No-load Stroke Per Minute	0-3200	0-3000	0-3000
Lifting Setting	4	/	/
Maximum Cutting Depth (mm)	WOOD 255 METAL 18 METAL TUBE 175	/	WOOD 180 METAL 15
Weight (kg)	4.2 (WITHOUT BATTERY)	2.7 (WITHOUT BATTERY)	1.7 (WITHOUT BATTERY)
Feature	HEAVY DUTY DESIGN LOW VIBRATION	COMPACT SIZE LOW VIBRATION ECONOMIC MODEL	ONE HAND OPERATION LIGHT WEIGHT LOW VIBRATION

User-friendly design with soft grip

Intelligent LED light, with memory function, easy to use

Tool-less blade change system convenient for users to quickly replace the saw blade

0-45°L/R beveling, suitable for multi-angle cutting

Provide 5 - speed and A - speed automatic mode

Brushless motor, strong power, high cutting efficiency

4 Pendulum settings, high cutting efficiency

20V BRUSHLESS JIG SAW

INTELLIGENT LED LIGHT

ALUMINUM DIE-CAST BASE PLATE

ADJUSTABLE SAW DUST BLOWER

4 STAGE PENDULUM ACTION

20V BRUSHLESS JIG SAW

The DEVON Brushless Jigsaw use intelligent and constant speed control to achieve ultimate precision cut. These versatile jigsaws features four adaptable speeds and auto mode. A dual-guide blade holder improves accuracy and an LED light ensures confidence in every cut. Switch blades mid-work easily using the one-touch blade eject system.

INDUSTRY



INDUSTRY



	5831-LI-20E 20V JIG SAW	5832-LI-20E 20V JIG SAW
Reciprocating Stroke (mm)	26	26
No-load Stroke Per Minute	800-3500	350-3500
Lifting Setting	4	4
Maximum Cutting Depth (mm)	WOOD 120 STEEL 10 ALUMINUM 20	WOOD 120 STEEL 10 ALUMINUM 20
Weight (kg)	2.2 (WITHOUT BATTERY)	2.1 (WITHOUT BATTERY)
Feature	SOFT START CONSTANT SPEED DUST BLOW & VACUUM CONNECTION	SOFT START CONSTANT SPEED DUST BLOW & VACUUM CONNECTION

Brushless Motor
Efficient operation,
durable and reliable

SDS Quick Change System
Toolless replacement accessories,
convenient and efficient

Lighting System
Double LED lighting
design, work without
fear of dark environment

STARLOCK PLUS Interface
Efficient transmission,
fastening connection

5 Speed Adjustment
Adapts to different
working conditions

Ergonomic Design Handle
Soft plastic wrap + vibration
absorption design,
comfortable operation

20V BRUSHLESS OSCILLATING MULTI-TOOL

5 SPEED
ADJUSTMENT

ERGONOMIC DESIGN
VIBRATION
ABSORPTION DESIGN

DUAL LED
WORKING LIGHT

SDS QUICK CHANGE
SYSTEM (STARLOCK MAX)

20V BRUSHLESS OSCILLATING MULTI-TOOL

The DEVON 20V Brushless Oscillating Multi-Tool channels up to 20,000 OPM to cut, trim, plunge, sand, grind, and scrape with confidence. Maintain control with advanced vibration suppression. The 3D Starlock connection maximizes the exchange between motor and blade for ultimate oscillating efficiency while making blade changes super easy. Built-in LED lighting also ensures complete visibility while you work, even in tough conditions.



5951-LI-20 20V OSCILLATING MULTI-TOOL

Vibrational frequency (OPM)	10000-20000
Oscillation angle	4°
Vibration frequency adjustment (OPM)	10000
	12000
	15000
	18000
	20000
Weight (kg)	1.3 (without battery)

Slide Bar Design
Improve cutting ability

Advanced Brushless Motors
Deliver more run-time and longer life

Double Action Switch & Double Safety Switch
Ensure safety, easy to operate

Positive Bevel Degree
0-48° Left/Right
Suitable for various working conditions

Led Cut Line Indicator
For cutting accuracy

Durable Base Design
Provides maximized cutting capacity


Positive Miter Degree
0-48° Left/Right
Suitable for various cutting conditions

20V BRUSHLESS MITER SAW

SLIDE BAR DESIGN

ROBUST DIE-CAST ALUMINIUM DESIGN

FAST AND PRECISE SETTING OF COMMON ANGLES USING STOP POINTS

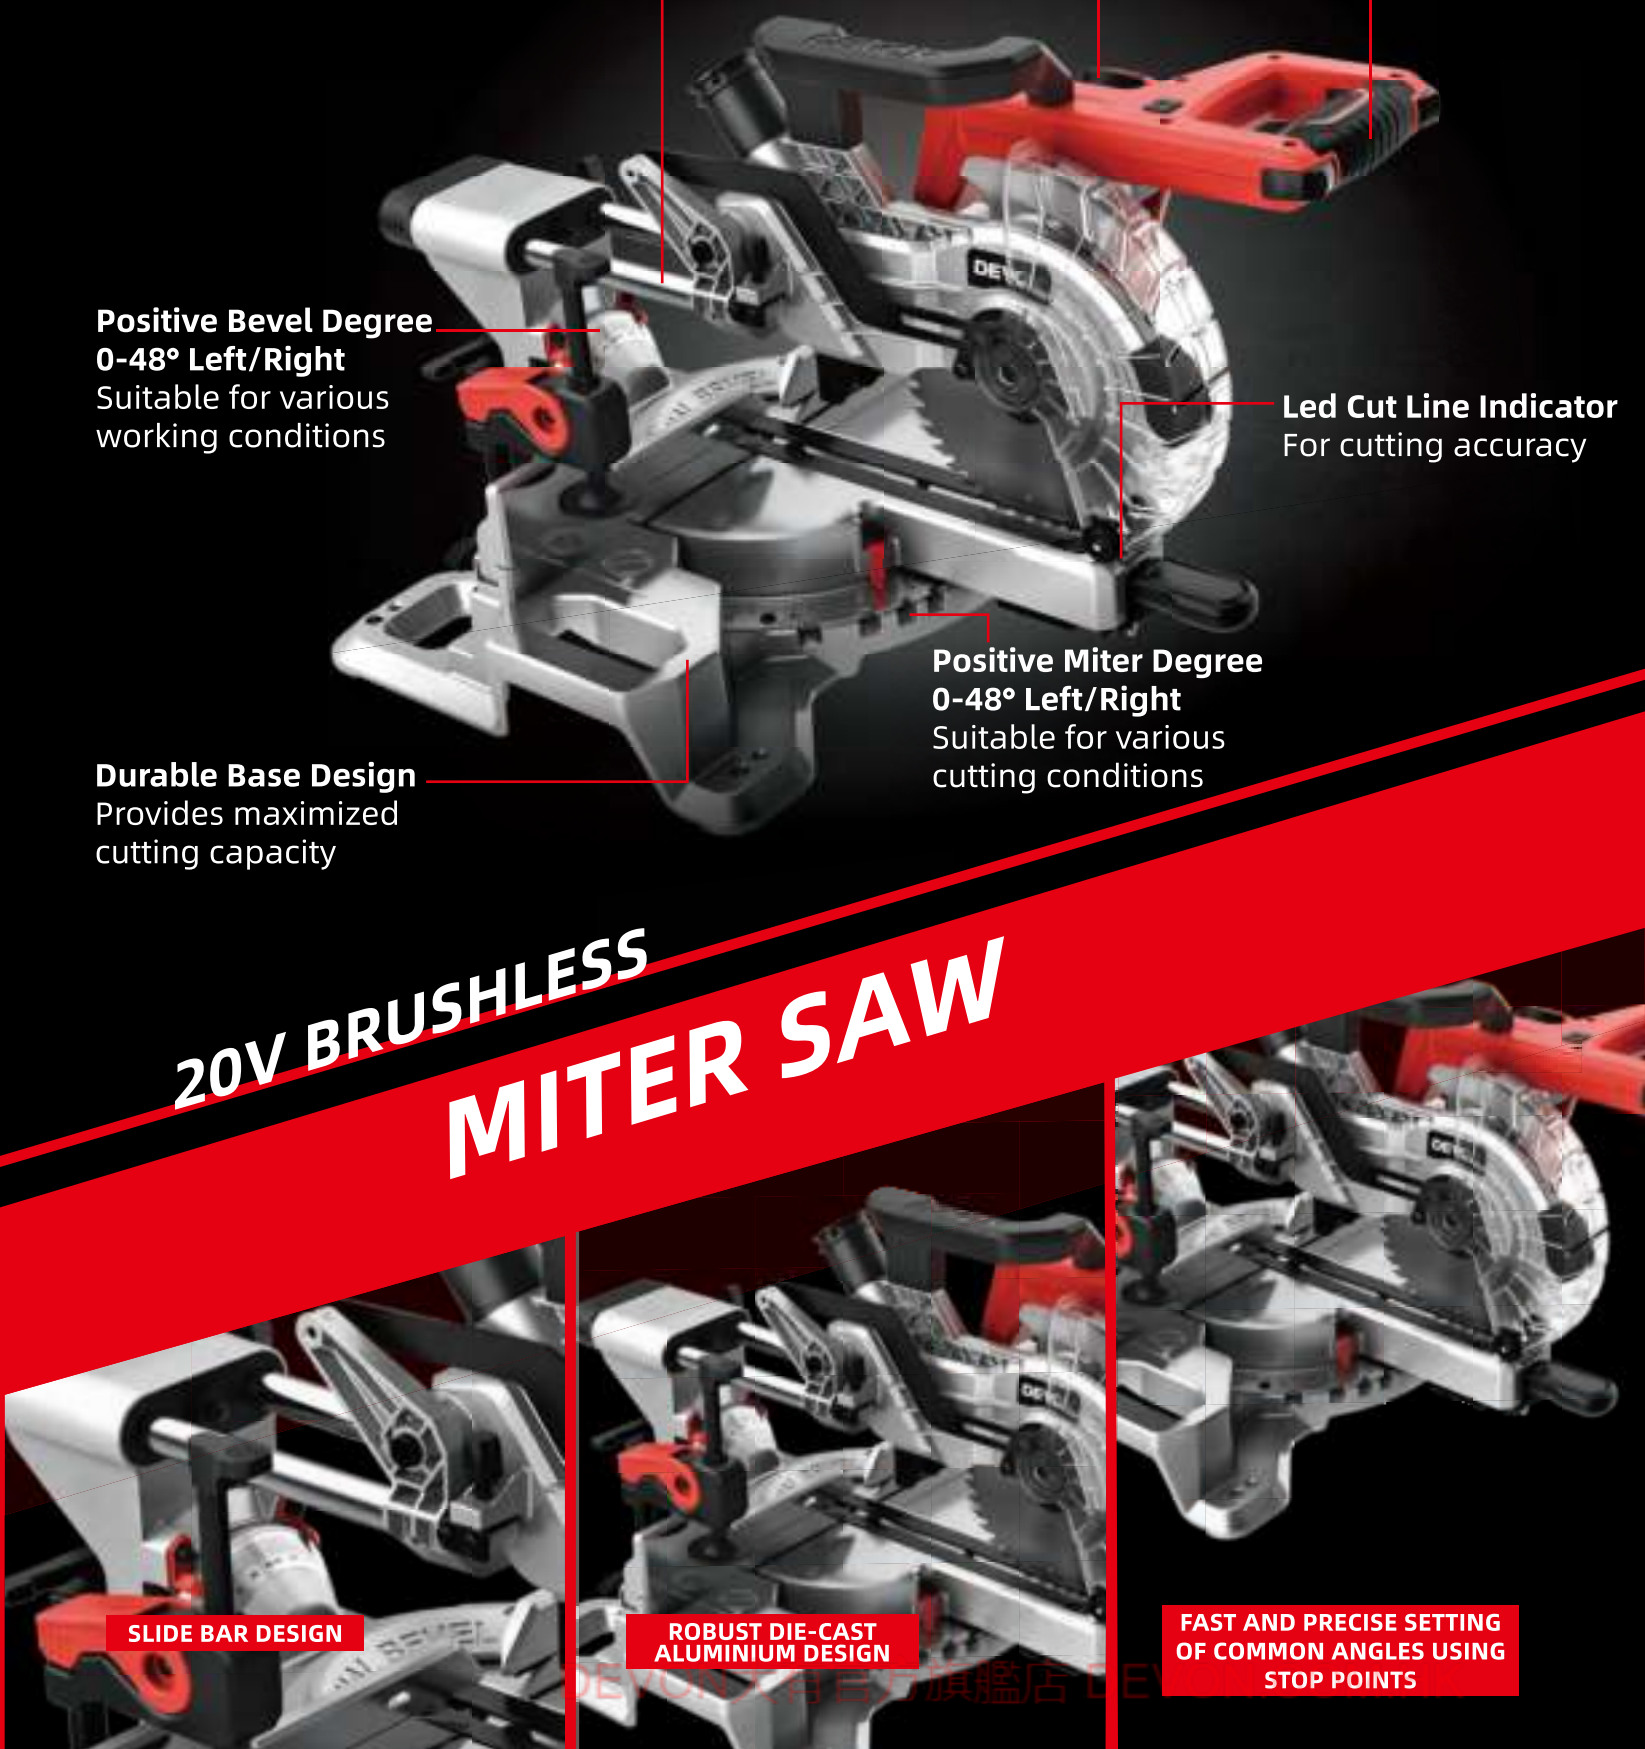

20V BRUSHLESS MITER SAW

This brushless whipsaw uses an advanced brushless motor to provide more run time and longer life. Slide bar design and LED cutting indication ensure accurate cutting. Commonly used Angle quick adjustment, suitable for various cutting conditions.



	6301-LI-20 20V MITER SAW
No-load Speed (rpm)	5500
Blade Diameter (mm)	190
Saw blade aperture (mm)	30/20
Maximum tilt angle (°)	LEFT/RIGHT48
Maximum chamfer angle (°)	LEFT/RIGHT48
Maximum cutting capacity	66X125
Weight (kg)	12.9 (WITHOUT BATTERY)

2000 Lumens High
Brightness light source

Innovation Design
The Lamp Holder Can
Rotate
Meet variety of
illumination Angle

Increase Heat Sink
Design
Efficient heat
dissipation and
prolong life time

Strong Pc Lampshade
High refraction of light
transmittance

LIGHT

**2000 LUMENS HIGH
BRIGHTNESS**

STRONG PC LAMPSHADE

360°ROTATE

20V LIGHT

The DEVON 20V Flood Light delivers ultimate visibility with essential jobsite durability. Control high Lumens where you need light most with multi adjustability and adaptable mounts. Ensuring unmatched battery power, runtime, and fast charging with DEVON advantage technology.



	5535-LI-20 20V WORK LIGHT	5532-LI-20 20V WORK LIGHT	5521-LI-20 20V WORK LIGHT
Brightness (lm)	2800	2000	100
Brightness Setting	3	2	/
Runtime (h)	HIGH BRIGHTNESS: 2.5 (5.0AH BATTERY) LOW BRIGHTNESS: 11.5 (5.0AH BATTERY)	HIGH BRIGHTNESS: 4 (5.0AH BATTERY) LOW BRIGHTNESS: 6.5 (5.0AH BATTERY)	20(2.5AH BATTERY) 40(5.0AH BATTERY)
Weight (kg)	1.0(WITHOUT BATTERY)	1.5(WITHOUT BATTERY)	0.33(WITHOUT BATTERY)
Feature	ROTARY HEAD HANGING HOOK LONG LIGHTING DISTANCE (MAX. 600M+) FIT WITH 12V AUTO POWER CONNECTION	HIGH LUMEN ROTARY HEAD	ROTARY HEAD HANGING HOOK

**High Quality
Expansion Pipe**
Long life and easy
to use

**Shoulder Strap
Structure**
Convenient for user
to carry

**Manual Filter
Cleaning Function**
Power suction
ensures fast work

Max vacuum pressure:
12Kpa
Max airflow: 1400L/min
High efficiency of dust
collection

VACUUM

**MANUAL FILTER
CLEANING FUNCTION**

**2.5M HIGH QUALITY
EXPANSION PIPE**

**EXCELLENT
PERFORMANCE**

20V VACUUM CLEANER

The DEVON Vacuum Cleaner dominates spills, dust, and debris with powerful suction. Optimize your runtime and performance to meet job demands with enhanced Eco and Boost modes. Reduced performance is a thing of the past with instant flow reversal, which keeps the filter clear and suction maxed. Onboard storage keeps attachments ready. This jobsite vacuum is also powered by the same superior FLEX Advantage as other FLEX power tools, meaning unmatched 24V battery power, runtime, and fast charging speed.



**4713-LI-20MC
20V VACUUM CLEANER**

**4715-LI-20
DUST EXTRACTOR**

Max Airflow (m ³ /min)	1.4	Matched Hammer Chuck Diameter (mm)	16
Max Vacuum Pressure (kPa)	12	Work Length (mm)	100
Dust Capacity (L)	6	Weight (kg)	1.3 (WITHOUT BATTERY)
Weight (kg)	3.3 (WITHOUT BATTERY)		

Hidden Handle
Lightweight design,
easy to carry

Brushless Motor
Long life time

Stepless Speed Control
Easy to adjust the air
effect

Support Devon 20v
battery pack
or AC Type-C input



20V BRUSHLESS FAN



BRUSHLESS MOTOR



POWERFUL AIRFLOW



**HIDDEN HANDLE &
LIGHTWEIGHT DESIGN**

DEVON大有官方旗舰店 DE

20V BRUSHLESS JOBSITE FAN

The 20V Brushless Jobsite Fan provides up to 32 hours of portable air flow on a single charge with a 5.0Ah lithium battery on low (sold separately). Stepless speed setting and 180-degree pivoting rotation put you in control. Support DEVON 20V battery pack or AC Type-C input. Includes DEVON Advantage for ultimate crosscompatibility—ensuring unmatched battery power, runtime, and fast charging.



**6801-LI-20
20V JOBSITE FAN**

Maximum wind speed(Meters per minute)	375
Maximum air volume(Cubic meter per minute)	14
Runtime (h)	HIGH:7.5 (5.0AH BATTERY) LOW: 32.5 (5.0AH BATTERY)
Weight (kg)	1.3 (WITHOUT BATTERY)

Brushless Motor
Improve efficiency
greatly

Soft Grip Handle
Operation comfortable
and stable

**Three Speed
Control Dust-Proof
Switch**

Two Gear Selection
Meet the different needs
of users

Spindle Stop Function
For easy, tool-free paddle
change, eliminates
the need to search for
spanners

20V BRUSHLESS MUD MIXER

**DUAL HANDLE
GRIP DESIGN**

THREE SPEED CONTROL

POWERFUL MOTOR

DEVON 大有官方旗舰店 DEVON.COM.HK

20V BRUSHLESS MUD MIXER

The DEVON Mud Mixer delivers the power, comfort, and control to prep any material for the job. The ergonomic dual-handle design enhances your stability and control. Two mechanical gear speeds help you power through even the toughest mixes with ease. Additionally, three electronic speed modes help you dial in the speed for total control of every mix. And maximize your DEVON Advantage with DEVON battery cross-compatibility to deliver the same unrivaled power, runtime, and fast charging speed as your other DEVON power tools.



**8150-LI-20
20V MIXER**

No-load Speed (rpm)	10-210/0-325/0-530	110-320/0-490/0-780
Maximum Mixing diameter (mm)	120	
Mixing Thread Type	M14	
Weight (kg)	4.1 (WITHOUT BATTERY)	



- Brushless motor with greater efficiency and a longer service life
- Lithium battery design, wireless operation, light and convenient
- 8 mm polishing stroke, positive-action drive provides high abrasive power without creating any holograms
- Ergonomically shaped with softgrip, can be controlled with precision and is always comfortable yet secure to hold.

Noload Speed (opm)

Base Plate diameter (mm)

Eccentric diameter (mm)

Weight (kg)

2001-LI-20 20V BRUSHLESS POLISHER

2300-3800

150

8

1.8 (WITHOUT BATTERY)



- Lightweight design handle, easy to operate and comfortable to use for a long time
- Compact design, light weight, easy to transport and storage
- Belt drive deceleration, lower noise, suitable for indoor use

Rated pressure (bar)

Permitted pressure(bar)

Rated water flow rate (L/min)

Maximum water inlet pressure (bar)

Weight (kg)

6703-LI-20 20V HIGH PRESSURE WASHER

24

50

3

180

2.5 (WITHOUT BATTERY)



- Pressure preset
- Auto-stop when fully inflated
- Digital display
- Tire pressure monitoring
- Small, portable and multifunctional

5940-LI-20 20V DUAL FUNCTION INFLATOR

Rated Voltage (V)

Maximum Air Pressure (kPa)

Weight (kg)

20 ≡ (DEVON 20V BATTERY)

12 ≡ (VEHICLE POWER)

11

1.89 (WITHOUT BATTERY)



- Lightweight & portable
- FM & AM Radio
- Bluetooth connection

5935-LI-20 20V RADIO

Power Output (W)	4
Bluetooth Range (m)	10
AUX Stereo Jack (mm)	3.5
Receiving Range (mm)	FM 87.5-108 MHZ AM 522-1629 MHZ
Weight (kg)	0.68 (WITHOUT BATTERY)



- Four temperature settings
- Flexible temperature control
- Reasonable pocket design
- Convenient

5936-LI-12/20 HEATED JACKET


Heating Area	LEFT CHEST, RIGHT CHEST, BACK WAIST
Temperature Setting	4
Size	L/XL
Weight (kg)	1.2/1.3 (WITHOUT BATTERY)



- Strong wind
- Low noise
- Three speed control settings
- Sun-proof and oil resistance
- Removable sleeves

5950-LI-12/20 FAN JACKET

Voltage (V)	12V (5120 SERIES BATTERY & 5915 CONVERTER) 12V/20V (5175/5150 SERIES BATTERY & 5918 CONVERTER)
Runtime (h)	5 (12V, 2.0AH) 18 (20V, 4.0AH)
Size	M/L/XL



Automatic chain oiling for better cutting performance

Brushless motor for cutting efficiency

Super compact and lightweight design for comfortable and portable

High quality bar and chain strong and durable

20V BRUSHLESS CHAIN SAW



AUTOMATIC CHAIN OILING



HIGH QUALITY BAR AND CHAIN TOOLS



SUPER COMPACT

DEVON 大有官方旗舰店 DEVON.COM.HK

20V BRUSHLESS CHAIN SAW

The DEVON chain saw is built tough to tackle even the hardest jobs. With a high speed 12m/s chain speed and a powerful motor, nothing will get in the way. An outstanding combination of high torque and chain speed-perfect for easily cutting through branches and medium-sized logs up to 40cm in width.



	4556-LI-40 20VX2 CHAIN SAW	4557-LI-20 20V CHAIN SAW	4559-LI-20 20V CHAIN SAW
Blade Length (cm)	40	30	15
Speed (m/s)	12	7.9	7
Oil Volume (mL)	150	200	60
Weight (kg)	3.9(WITHOUT BATTERY)	2.7(WITHOUT BATTERY)	1.1(WITHOUT BATTERY)

Blade tip protectoe, prevents blades becoming damaged by fences and walls

Electric safety brake, stops blade when trigger is released



Brushless motor for better performance

Rotating rear handle, for more comfort and control in use

Dual action blades, for less vibration when cutting

Laser cut, diamond ground, cutting blades, cleaner and more precise cutting

20V BRUSHLESS TRIMMER

ELECTRIC SAFETY BRAKE

ROTATING REAR HANDLE

DUAL ACTION BLADES

大有官方旗艦店 DEVON.COM.HK

20V BRUSHLESS HEDGE TRIMMER & PRUNER

This DEVON 20V Line Trimmer/Brush Cutter use rear positioned brushless motor, provides high torque. With bump head line feed and foldable body design, bring extraordinary user experience. Replaceable working attachments, one machine with two function.



	4220-LI-20 20V HEDGE TRIMMER		8305-LI-20 20V BRUSHLESS PRUNER
Blade Length (cm)	55	Shear diameter (mm)	25 / 35
No-load Speed (ipm)	2800	Weight (kg)	0.91 (WITHOUT BATTERY)
Maximum cutting capacity (mm)	25		
Weight (kg)	2.8 (WITHOUT BATTERY)		



Bicycle handle, comfortable operation, provide Super reaction torque, enhance Operation safety

Trigger switch Adjustable cutting speed

Replaceable Working Attachments
String trimmer and brush cutter

Rear positioned brushless motor Provides high torque

Foldable shaft for easy storage

20V BRUSHLESS CUTTER

TRIGGER SWITCH

BICYCLE HANDLE

REPLACEABLE WORKING ATTACHMENTS

20V BRUSHLESS LINE TRIMMER/BRUSH CUTTER

This DEVON 20V Line Trimmer/Brush Cutter use rear positioned brushless motor, provides high torque. With bump head line feed and foldable body design, bring extraordinary user experience. Replaceable working attachments, one machine with two function.



	4823-LI-40 20V LINE TRIMMER/BRUSH CUTTER	4822-LI-20 20V LINE TRIMMER/BRUSH CUTTER	4825-LI-40 20V LINE TRIMMER/BRUSH CUTTER
Cutting Diameter (mm)	350	300	255
Line Diameter (mm)	2	2	2
Blade Size (mm)	/	230 (9°)	255 (10°)
Speed (rpm)	6300	5500-6500	6300
Weight (kg)	5.7 (WITHOUT BATTERY)	4.7 (WITHOUT BATTERY)	5.2 (WITHOUT BATTERY)



Over-mold handle for comfortable use

PCB board non-inductive design
Stable performance, long lifetime

80 m/s wind speed
Ensure blow strength of user

Compact structure, small space can be easy to work

Brushless motor for better performance

20V BRUSHLESS BLOWER



POWERFUL AIRFLOW



VARIABLE

20V BRUSHLESS JOBSITE BLOWER

The DEVON Jobsite Blower featuring a brushless motor, a turbine fan, variable speed settings, and good balance in a lightweight build, this tool delivers a knockout blow to those troublesome hard-to-reach areas. Built for moderate duty at an unbeatable price, it delivers very focused airflow so you can stay clean and in control. Includes FLEX Advantage for ultimate cross-compatibility—ensuring unmatched battery power, runtime, and fast charging.



	4712-LI-20 20V BLOWER	4712-LI-20E 20V BLOWER	4707-LI-20 20V BLOWER
No-load Speed (rpm)	18000	18000	10000-18000
Maximum Air Speed (m/s)	80	80/70/51	41.7
Maximum Air Flow (m ³ /min)	3.11	3.11/2.6/1.9	11.2
Weight (kg)	0.95 (WITHOUT BATTERY)	1 (WITHOUT BATTERY)	2.0 (WITHOUT BATTERY)

DEVON





- Low voltage protection
Prevent the battery pack from being damaged by overdischarge
- Discharge over temperature protection
Prevent fire at high temperature when the battery pack is working
- Charging overvoltage protection
Prevent overcharging of battery packs
- Charging voltage imbalance protection
Prevent battery pack charging damage

	5165-LI-12-20	5165-LI-12-25
Battery Voltage (V)	12	12
Battery Capacity (Ah)	2.0	2.5
Weight (kg)	0.18	0.18
Weight (kg)	1.8 (WITHOUT BATTERY)	1.8 (WITHOUT BATTERY)



- SMART CHARGE GAUGE
Indicator lights show charging levels for efficient use and easier recharging
- CHARGE IQ
Built-in intelligent processor optimizes power flow for accelerated charge time

	CHARGING TIME		
	2.0Ah	2.0Ah	2.0Ah
5385-Li-12	50min	50min	50min
5386-Li-12	150min	200min	200min

Torque Setting
Used for different screws driving and drill situation

2-Speed Gear Box
Provides high speed for fast drilling or high torque for powerful driving

BL Motor
Strong power and improve efficiency greatly

Led Work Light
An integrated LED can light the working surface to provide much more convenience

All Rubber Protection
Rubber protection design, protect the tool from drop and instant impact

12V BRUSHLESS DRILL DRIVER

HIGH POWER

COMPACT SIZE

EXCEPTIONAL RUNTIME

BRIGHT

DEVON 大有官方旗舰店 DEVON.COM.HK

12V BRUSHLESS DRILL DRIVER

Powered by DEVON new 12V lithium battery platform and powered by powerful brushless motor, this brushless drill driver delivers an unparalleled operating experience. 50 Nm large torque, mechanical double speed, comparable to 20V electric drill performance. Compact structure, lightweight body, suitable for a variety of scenarios.



	5208-LI-12 12V DRILL DRIVER	5209-LI-12 12V DRILL DRIVER	5206-LI-12 12V DRILL DRIVER	5207-LI-12 12V DRILL DRIVER
Maximum Chuck Diameter (mm)	10	10	10	10
No-load Speed (rpm)	LOW 0-500 HIGH 0-1700	LOW 0-450 HIGH 0-1500	LOW 0-450 HIGH 0-1500	LOW 0-450 HIGH 0-1500
Impact Rate (ipm)	/	LOW 0-7500 HIGH 0-27000	/	LOW 0-8000 HIGH 0-28800
Maximum Drilling Diameter (mm)	STEEL 8 WOOD 20	STEEL 8 WOOD 20	STEEL 8 WOOD 20	STEEL 8 WOOD 20
Maximum Torque (N·m)	25/50	25/50	17/38	17/38
Weight (kg)	0.7(WITHOUT BATTERY)	0.7(WITHOUT BATTERY)	0.7(WITHOUT BATTERY)	0.7(WITHOUT BATTERY)
remake		IMPACT		IMPACT

4V SCREWER DRIVER

This screw driver adopts manual and automatic integrated design, with a maximum torque output of 5 nm, three-speed torque adjustment, with high brightness LED lights and tool free quick change chuck design, especially suitable for electricians, installers, etc.



	5616-LI-4 4V SCREW DRIVER	5612-LI-4 4V SCREW DRIVER
Chuck Diameter (mm)	6.35 (HEXAGONAL)	6.35 (HEXAGONAL)
No-load Speed (rpm)	300	230
Weight (kg)	0.28	0.21

STRAIGHT GRINDER

DEVON new die grinder uses brand new motor platform to create a slimmer body for long continuous operations. Rubber wrapped front handle design for vibration reduction, heat insulation and more comfortable operation. With high precision chuck, bring better operating experience for users.



	2818-1 6MM STRAIGHT GRINDER	2819-1 6MM STRAIGHT GRINDER	2850-4-6B 6MM STRAIGHT GRINDER
Rated Power Input (W)	500	500	400
No-load Speed (rpm)	28000	28000	33000
Chuck Diameter (mm)	6	6	6
Maximum Diameter (mm)	25	25	25
Weight (kg)	1.6	1.6	1.2
Remarks	SIDE SWITCH	BACK SWITCH	BACK SWITCH

Design Of Brushless

No need to replace the carbon brush

Brushless and Hallless

Control Technology
Breakthrough short using

Compact Motor Design

body perimeter just 182mm

Brushless Motor

Sharply increase power conversion rate

Intelligent Control Technology

Intelligent Sense Conditions

Automatically match the best working status

Smart Protection System

Protect user safety

Smart Matching Wide Voltage

Maintain stable and efficient output

Intelligent Signal Switch

IP67 dustproof and waterproof

Brushless Motor

BRUSHLESS ANGLE GRINDER

BRUSHLESS ANGLE GRINDER

DEVON new brushless Angle Grinder uses an industry-leading high-voltage brushless motor platform, break through the limits of AC Angle Grinder lifetime beyond the industry level. High precision intelligent control system, real-time feedback working status, stable output, effectively ensure user safety. Bring users unprecedented operating experience.

INDUSTRY




INDUSTRY



	2838-13-100BL ANGLE GRINDER	2838-13-125BL ANGLE GRINDER
Rated Power Input (W)	1300	1300
No-load Speed (rpm)	10000	10000
Spindle Diameter	M10	M14
Grinding/Cutting Disc Diameter (mm)	100	125
Weight (kg)	1.8	1.8
Remarks	SIDE SWITCH	SIDE SWITCH
remake		IMPACT
Feature	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN METAL SURFACE TREATMENT ANTI KICKBACK SOFT START	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN METAL SURFACE TREATMENT ANTI KICKBACK SOFT START



INDUSTRY

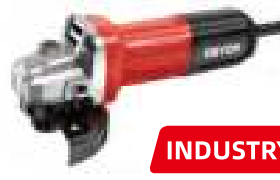

INDUSTRY



INDUSTRY

	2855-10-100 ANGLE GRINDER	2855-10-100B ANGLE GRINDER	2855-10-125 ANGLE GRINDER
Rated Power Input (W)	1010		1010
No-load Speed (rpm)	12000		12000
Spindle Diameter	M10		M14
Grinding/Cutting Disc Diameter (mm)	100		125
Weight (kg)	1.6		1.6
Feature	SLIM HANDLE HIGH OVERLOAD CAPACITY HIGH GRINDING/CUTTING EFFICIENCY SIDE SWITCH	SLIM HANDLE HIGH OVERLOAD CAPACITY HIGH GRINDING/CUTTING EFFICIENCY BACK SWITCH	SLIM HANDLE HIGH OVERLOAD CAPACITY HIGH GRINDING/CUTTING EFFICIENCY SIDE SWITCH



	2835-7-100 ANGLE GRINDER	2835-7-100B ANGLE GRINDER	2852-7-100B ANGLE GRINDER	2852-7-100B ANGLE GRINDER
Rated Power Input (W)	780		710	710
No-load Speed (rpm)	12000		12500	12500
Spindle Diameter	M10		M14	M10
Grinding/Cutting Disc Diameter (mm)	100		125	100
Weight (kg)	1.4		1.2	1.2
Feature	SLIM HANDLE OVERLOAD CAPACITY MIDDLE DUTY SIDE SWITCH	SLIM HANDLE OVERLOAD CAPACITY MIDDLE DUTY BACK SWITCH	SLIM HANDLE MINI SIZE LIGHT DUTY AS ENTRY MODEL SIDE SWITCH	SLIM HANDLE MINI SIZE LIGHT DUTY AS ENTRY MODEL BACK SWITCH



	2888-15-125C1 ANGLE GRINDER	2888-15-150C1 ANGLE GRINDER
Rated Power Input (W)	1500	1500
No-load Speed (rpm)	11500	9700
Spindle Diameter	M14	M14
Grinding/Cutting Disc Diameter (mm)	125	150
Weight (kg)	2.1	2.1
Feature	MOST POWERFUL ONE HAND GRINDER METAL SURFACE TREATMENT ANTI KICKBACK SOFT START SIDE SWITCH	MOST POWERFUL ONE HAND GRINDER METAL SURFACE TREATMENT ANTI KICKBACK SOFT START SIDE SWITCH



INDUSTRY



INDUSTRY

	2851-11-100B ANGLE GRINDER	2821 ANGLE GRINDER
Rated Power Input (W)	1100	1010
No-load Speed (rpm)	11000	9200
Spindle Diameter	M10	M10
Grinding/Cutting Disc Diameter (mm)	100	100
Weight (kg)	1.8	1.9
Feature	HIGH OVERLOAD CAPACITY CUTTING EFFICIENCY CONCRETE HEAVY DUTY CUTTING BACK SWITCH	SIDE SWITCH



INDUSTRY



	2822 125MM ANGLE GRINDER	2828-9-100 ANGLE GRINDER	2828-9-100B ANGLE GRINDER
Rated Power Input (W)	1010	900	900
No-load Speed (rpm)	9200	11000	11000
Spindle Diameter	M14	M10	M10
Grinding/Cutting Disc Diameter (mm)	125	100	100
Weight (kg)	2	1.6	1.6
Feature	SIDE SWITCH	HIGH OVERLOAD CAPACITY LONG LIFE STONE/CONCRETE GRINDING & CUTTING SIDE SWITCH	HIGH OVERLOAD CAPACITY LONG LIFE STONE/CONCRETE GRINDING & CUTTING BACK SWITCH



	2828-9-100CE ANGLE GRINDER	2828-9-125 ANGLE GRINDER	2828-9-125CE ANGLE GRINDER
Rated Power Input (W)	900	900	900
No-load Speed (rpm)	6000-11000	11000	6000-11000
Spindle Diameter	M10	M14	M14
Grinding/Cutting Disc Diameter (mm)	100	125	125
Weight (kg)	2.0	1.6	2.0
Remarks	SIDE SWITCH	SIDE SWITCH	SIDE SWITCH

Designed auxiliary handle with vibration absorption can reduce the fatigue

Powerful 2600W industrial fully-guarded motor with anti-load capacity and protection class upgrading

New designed handle according to the flesh structure make the user comfortable when griping

Soft starter and over-load protection system (Optional)

The main handle can now be turned 90° to both sides and be engaged (Optional)

Vibration reduced thanks to vibration control main handle, for low-fatigue working

Circuit breaker brush prevents the motor from damaging, extend the motor life-span

High qualified gear, axletree and efficient dustproof system make the machine durable

LARGE ANGLE GRINDER



2831-26-230 ANGLE GRINDER	2831-26-230CI ANGLE GRINDER	2831-26-230CIQ ANGLE GRINDER	2831-26-230CIHQ ANGLE GRINDER
------------------------------	--------------------------------	---------------------------------	----------------------------------

Rated Power Input (W)	2600		
No-load Speed (rpm)	6500		
Spindle Diameter	M14		
Grinding/Cutting Disc Diameter (mm)	230		
Weight (kg)	5.6		
Feature	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN HIGH POWER	SOFT START, OVERLOAD PROTECTION	SOFT START, OVERLOAD PROTECTION, QUICK CHANGE GUARD
			SOFT START, OVERLOAD PROTECTION, QUICK CHANGE GUARD, ROTATABLE HANDLE



2830 -26-180 180MM ANGLE GRINDER	2830 -26-180CI 180MM ANGLE GRINDER	2830 -26-180CIQ ANGLE GRINDER	2830 -26-180CIHQ ANGLE GRINDER	2811 ANGLE GRINDER	2811-1S ANGLE GRINDER
-------------------------------------	---------------------------------------	----------------------------------	-----------------------------------	-----------------------	--------------------------

Rated Power Input (W)	2600			2050	
No-load Speed (rpm)	8400			6500	
Spindle Diameter	M14			M14	
Grinding/Cutting Disc Diameter (mm)	180			230	
Weight (kg)	5.5			5	
Feature	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN HIGH POWER	SOFT START, OVERLOAD PROTECTION	SOFT START, OVERLOAD PROTECTION, QUICK CHANGE GUARD	SOFT START, OVERLOAD PROTECTION, QUICK CHANGE GUARD, ROTATABLE HANDLE	SOFT START, OVERLOAD PROTECTION



2810 ANGLE GRINDE	2810-2S ANGLE GRINDER	2812-1 ANGLE GRINDER	2812 ANGLE GRINDER	2813 ANGLE GRINDER
-------------------	-----------------------	----------------------	--------------------	--------------------

Rated Power Input (W)	2000		1560	1400	1400
No-load Speed (rpm)	8200		9000		9000
Spindle Diameter	M14		M14		M14
Grinding/Cutting Disc Diameter (mm)	180		150		125
Weight (kg)	4.9		2.7	2.5	2.5
Remarks	SOFT START, OVERLOAD PROTECTION	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN	HIGH OVERLOAD CAPACITY DUST PROOF DESIGN	

Practical waist clamp design,
more convenient for carry

Excelsior electric motor
with powerful impetus,
higher power and longer
service life

Light weight, slim
and compact

Professional chuck, more
accurate location

Two-stage gear transmission
provide big output
torque and strong over-load
capacity

DRILL DRIVER



	1816 13MM ELECTRIC DRILL	1819-5-10RE 10MM ELECTRIC DRILL	1819-5-10RE KLE 10MM ELECTRIC DRILL	1817 10MM ELECTRIC DRILL	1817-4-10RE KLE 10MM ELECTRIC DRILL
Rated Power Input (W)	550	500			400
No-load Speed (rpm)	0-2600	0-3100			0-1650
Maximum Drilling Diameter (mm)	STEEL 13 WOOD 25	STEEL 10 WOOD 25			STEEL 10 WOOD 20
Weight (kg)	1.6	1.3			1.2
Feature	HIGH TORQUE HIGH POWER	HIGH POWER	HIGH POWER KEYLESS CHUCK	ADJUSTABLE SPEED, FORWARD AND REVERSE FUNCTION	HIGH TORQUE TWO-STAGE GEARING



	1818-6-10HE 10MM ELECTRIC DRILL	1818-6-10HE KLE 10MM ELECTRIC DRILL	1818-4-10RE 10MM ELECTRIC DRILL	1818-4-10RE KLE 10MM ELECTRIC DRILL
Rated Power Input (W)	600			460
No-load Speed (rpm)	0-4000			0-3000
Maximum Drilling Diameter (mm)	STEEL 13 WOOD 25			STEEL 10 WOOD 20
Impact Rate (ipm)	/			/
Weight (kg)	1.3			1.3
Remarks	HIGH SPEED,ADJUSTABLE SPEED	ADJUSTABLE SPEED, KEYLESS CHUCK	ADJUSTABLE SPEED, FORWARD AND REVERSE FUNCTION	ADJUSTABLE SPEED, FORWARD AND REVERSE FUNCTION, KEYLESS CHUCK



	1515 13MM IMPACT DRILL	1509 13MM IMPACT DRILL
Rated Power Input (W)	600	550
No-load Speed (rpm)	0-2900	0-2600
Maximum Drilling Diameter (mm)	CONCRETE 13 STEEL 10 WOOD 28 MASONRY 16	CONCRETE 13 STEEL 13 WOOD 25 MASONRY 16
Impact Rate (ipm)	0-52200	41600
Weight (kg)	2.2	1.75
Remarks	ADJUSTABLE SPEED FORWARD AND REVERSE FUNCTION	ADJUSTABLE SPEED, FORWARD AND REVERSE FUNCTION

Compact structure, higher drilling efficiency

Good sealing lubrication, longer lifetime

SDS-plus Quick Change Chuck structure, More convenient to use

Safety clutch design, safer operation

Lengthened design of soft rubber wrap sub-handle, comfortable operation more easily

Optimize wind road design, More conducive to heat dissipation

High efficiency dustproof motor, Longer service life

Electronic speed control switch, Dynamic sensitivity and accurate positioning

ROTARY HAMMER



	1107-26S 26MM ROTARY HAMMER	1107-26E 26MM ROTARY HAMMER	1107-26DE 26MM ROTARY HAMMER	1107-26DRE 26MM ROTARY HAMMER
Rated Power Input (W)	800	800	800	800
No-load Speed (rpm)	0-1150	0-1150	0-1150	0-1150
Impact Rate (ipm)	0-4000	0-4000	0-4000	0-3700
Impact Energy (J)	3	3	3	4.8
Maximum Drilling Diameter (mm)	CONCRETE 26	CONCRETE 26	STEEL 13 WOOD 30	MASONRY 68
Optimum Drilling Range (mm)	6-18	6-18	6-18	6-18
Chuck Type	SDS-PLUS	SDS-PLUS	SDS-PLUS	SDS-PLUS
Weight (kg)	2.6	2.6	2.6	2.6

Feature

HAMMER DRILLING SAFETY CLUTCH
LIGHT WEIGHT HIGH EFFICIENCY

DRILLING, HAMMER DRILLING
SAFETY CLUTCH LIGHT WEIGHT HIGH
EFFICIENCY

DRILLING, HAMMER DRILLING, CHISELING
SAFETY CLUTCH LIGHT WEIGHT HIGH
EFFICIENCY

DRILLING, HAMMER DRILLING,
CHISELING, ADJUSTMENT SAFETY
CLUTCH LIGHT WEIGHT HIGH
EFFICIENCY

INDUSTRY



INDUSTRY



INDUSTRY



	1108-40D 40MM ROTARY HAMMER	1108-40DH 40MM ROTARY HAMMER	1104 30MM ROTARY HAMMER
Rated Power Input (W)	1150	1150	900
No-load Speed (rpm)	380	380	0-850
Impact Rate (ipm)	2900	2900	0-3700
Impact Energy (J)	10	10	4.8
Maximum Drilling Diameter (mm)	CONCRETE 40 MASONRY 90	CONCRETE 40 MASONRY 90	CONCRETE 30 STEEL 13 WOOD 30 MASONRY 80
Optimum Drilling Range (mm)	12-30	12-30	8-24
Chuck Type	SDS-MAX	SDS-MAX	SDS-PLUS
Weight (kg)	6.4	6.4	4.1

Feature

HAMMER DRILLING, CHISELING, ADJUSTMENT SAFETY CLUTCH
HEAVY DUTY SPECIAL DESIGN FOR CONCRETE DRILLING ANTI-VIBRATION HANDLE

DRILLING, HAMMER DRILLING, CHISELING, ADJUSTMENT
SAFETY CLUTCH HEAVY DUTY SPECIAL DESIGN FOR CONCRETE
DRILLING ANTI-VIBRATION HANDLE

INDUSTRY



INDUSTRY



	1110-12-27 27MM ROTARY HAMMER	1110-12-27D 27MM ROTARY HAMMER
Rated Power Input (W)	1250	1250
No-load Speed (rpm)	1200	1200
Impact Rate (ipm)	5000	5000
Impact Energy (J)	5.8	5.8
Maximum Drilling Diameter (mm)	CONCRETE 27	CONCRETE 27
Optimum Drilling Range (mm)	8-16	8-16
Chuck Type	SDS-MAX	SDS-MAX
Weight (kg)	4.3	4.3

Feature

HAMMER DRILLING SAFETY CLUTCH
SPECIAL DESIGN FOR CONCRETE DRILLING ANTI-VIBRATION HANDLE

HAMMER DRILLING, CHISELING, ADJUSTMENT SAFETY CLUTCH
SPECIAL DESIGN FOR CONCRETE DRILLING ANTI-VIBRATION HANDLE

DEMOLITION HAMMER

INDUSTRY



INDUSTRY



	1161-12 5KG DEMOLITION HAMMER	1161-12H 5KG DEMOLITION HAMMER
Rated Power Input (W)		1150
Impact Rate (ipm)		2900
Impact Energy (J)		12
Chuck Type	SDS-MAX	SDS-HEXAGON
Weight (kg)		5.5
Remarks	CHISELING FUNCTION	CHISELING FUNCTION

MARBLE CUTTER

INDUSTRY



INDUSTRY



	6112-15-125A 110MM MARBLE CUTTER	6112 110MM MARBLE CUTTER
Rated Power Input (W)		1500
No-load Speed (rpm)		12000
Diamond Cutting Disc Diameter (mm)		125
Cutting Disc Bore Depth (mm)		20
Maximum Cutting Depth (mm)		41
Plate Angle Adjusting Range (°)	0-45	/
Weight (kg)	3.0	2.9
Remarks	QUICK ADJUSTMENT OF CUTTING DEPTH AND ANGLE	QUICK ADJUSTMENT OF CUTTING DEPTH

CUT-OFF SAW

INDUSTRY



**6202-24-355
355MM CUT-OFF SAW**

Rated Power Input (W)	2400
No-load Speed (rpm)	3900
Maximum Cutting Disc Diameter (mm)	355
Weight (kg)	15.5

CIRCULAR SAW

INDUSTRY



**3266
235MM CIRCULAR SAW**

INDUSTRY



**3266-1
235MM CIRCULAR SAW**



**3217
185MM CIRCULAR SAW**

Rated Power Input (W)	2000	1300
No-load Speed (rpm)	4700	5000
Cutting Blade Diameter (mm)	235	185
Cutting Blade Bore Diameter (mm)	25.4	20
Maximum Cutting Depth (mm)	90°: 85 45°: 62	90°: 62 45°: 45
Weight (kg)	6.3	4.3

Feature

POWERFUL MOTOR
BIG CUTTING CAPACITY
LASER CUTTING GUIDE

POWERFUL MOTOR
BIG CUTTING CAPACITY

POWERFUL MOTOR
ERGONOMIC DESIGN

Speed control knob
Select speed cut easily

Fuselage of human body
engineering design
Soft plastic package,
vibration comfort

Double refers to the soft switch
Manipulation of the convenient

Three tool block structure
Convenient and line cutting,
cutting efficiency is higher

LED lighting
Easy to cut

Electronic constant
speed control
Load cutting more
efficient



Base rapidly agencies
Quickly adjust depth

Current overload
protection structure
To prevent overload
cutting

Double pendulum lever
balance structure
The whole machine vibration
is small, not hemp hand

RECIPROCATING SAW

RECIPROCATING SAW



	3325-13-32QCV 32MM RECIPROCATING SAW	3324-11-28Q 28MM RECIPROCATING SAW
Rated Power Input (W)	1300	1100
Reciprocating Stroke (mm)	32	28
No-load speed (rpm)	0-3000	0-2700
Lifting Setting	3	/
Maximum Cutting Depth (mm)	WOOD 300 METAL 20 METAL TUBE 250	WOOD 230 METAL 20
Weight (kg)	4.5	3.6
Feature	CONSTANT SPEED LOW VIBRATION HEAVY DUTY	HIGH CUTTING EFFICIENCY LONG LIFE

JIG SAW



	3144 120MM JIG SAW	3144-6-120Q 120MM JIG SAW	3131-5-70Q 70MM JIG SAW
Rated Power Input (W)	600		500
Reciprocating Stroke (mm)	26		19
No-load speed (rpm)	500-3000		800-3000
Maximum Cutting Depth (mm)	WOOD 120 STEEL 10 ALUMINUM 20		WOOD 70 STEEL 6 ALUMINUM 12
Weight (kg)	2.5		2.1
Feature	LONG DURABILITY ANTI-VIBRATION SYSTEM LED LIGHT QUICK BLADE FIXING		COMPACT SIZE QUICK BLADE FIXING

- **Smart Matching Wide Voltage**

Maintain stable and efficient output

- **Intelligent Control Module**

Actively control the body vibration during work

- **Intelligent Sense Conditions**

PWM modulation control technology, constant speed

- **Intelligent Signal Switch**

IP67 dustproof and waterproof

- **Smart Protection System**

Realize overload and short circuit protection

- **Brushless and Hallless**

Control Technology
Breakthrough short using

- **Brushless Motor**

Sharply increase power conversion rate

- **Design of brushless**

No need to replace the carbon brush

- **Compact Motor Design**

Body height as low as 110mm

Intelligent Control Technology



Brushless Motor

SANDER

SANDER

INDUSTRY



INDUSTRY



INDUSTRY



	2313-1 ORBITAL SANDER	2312-2 ORBITAL SANDER	2219-2-110BL PALM SANDER
Rated Power Input (W)	400	280	260
No-load Speed (rpm)	11000	14000	14000
Sanding Plate Size (mm)	113x228	93x184	110x100
Sanding Paper Size (mm)	115x280	93x228	114x140
Weight (kg)	3	1.7	1.1
Feature	HIGH EFFICIENCY HIGH POWER LOW VIBRATION	HIGH EFFICIENCY HIGH POWER LOW VIBRATION	HIGH EFFICIENCY HIGH POWER LOW VIBRATION CONSTANT SPEED LIGHT WEIGHT BRUSHLESS



	2215-2-110 PALM SANDER	2213 PALM SANDER	2231-1-104 PALM SANDER	2231-1-130 TRIANGLE SANDER
Rated Power Input (W)	220	200		170
No-load Speed (rpm)	13500	13500		15000
Sanding Plate Size (mm)	110x100	110x100	70x104	TRIANGLE (W*H) 90x130
Sanding Paper Size (mm)	114x140	114x140	76x140	TRIANGLE (W*H) 90x135
Weight (kg)	1.3	1.7	1	0.9
Feature	HIGH EFFICIENCY HIGH POWER LOW VIBRATION	HIGH EFFICIENCY LOW VIBRATION		

ROUTER

INDUSTRY



INDUSTRY



	1324-18-12E 12MM ELECTRIC ROUTER	1324 12MM ELECTRIC ROUTE	1316-1 12MM ELECTRIC ROUTER	1326-5-6 6MM EDGE TRIMMER
Rated Power Input (W)	1880	1750	1300	550
No-load Speed (rpm)	9000-22000	22000	12000-22000	33000
Plunge Depth (mm)		65	45	/
Chuck Size (mm)		3/8, 1/2	1/4, 1/2	1/4, 1/8
Weight (kg)		5.7	3.9	1.5
Feature	ADJUSTABLE SPEED	HEAVY DUTY	HIGH EFFICIENCY CONSTANT SPEED ONE HAND OPERATION	COMPACT SIZE

HOT AIR GUN

INDUSTRY



INDUSTRY



	7710-20-630 2000W HOT AIR GUN	7710-16-500 1600W HOT AIR GUN
Rated Power Input (W)	2000	1600
Temperature (°C)	I: 50, ±10% WITH COLD AIR II: 50~450, ±15% III: 50~630, ±15%	I: 250, ±10% II: 500, ±15%
Airflow (L/min)	I: 250, ±10% II: 350, ±15% III: 500, ±15%	I: 250, ±10% II: 500, ±15%
Temperature Setting	1-2-3-4-5	N/A
Airflow Setting	0-I-II-III	0-I-II
Weight (kg)		0.8

BLOWER



**4102-6-35E
BLOWER**

Rated Power Input (W)	630
Nominal Air Volume (m3 /min)	1.7-3.5
No-load Speed (rpm)	8000-16000
Pressure (kPa)	1.3-5.5
Weight (kg)	1.7

DRY WALL GRINDER


INDUSTRY



**2002-9-225
BRUSHLESS DRY WALL GRINDER**

Rated Power Input (W)	900
No-load Speed (rpm)	800-2000
Grinding disc size (mm)	215
Sandpaper size (mm)	225
Weight (kg)	2.9
Feature	BRUSHLESS WIRELESS CONTROL LED

DIGITAL LEVELER/ ANGLE MEASURER



	9418-D30	9419-D60
Rated Power Input (W)	LENGTH (CM)	30
No-load Speed (rpm)	MEASURING RANGE	0-90
Plunge Depth (mm)	BUBBLE ACCURACY	±0.029°
Rated Power Input (W)	DIGITAL DISPLAY ACCURACY	±0.05°(HORIZONTAL, VERTICAL)
No-load Speed (rpm)	±0.2°(OTHER ANGLE)	9000-22000
Plunge Depth (mm)	WORKING TEMPERATURE (°C)	0 ~ +40
Chuck Size (mm)	STORAGE TEMPERATURE (°C)	-90
Weight (kg)	BATTERY	2 X AAA BATTERIES
Remarks	ACCESSORIES	SOFT BAG/ BATTERIES
Weight (kg)	WEIGHT (KG)	0.45/0.82





METAL DRILL BIT HSS-G





DEVON metal drill bit HSS-G is made of excellent M2 high-speed steel, formed through quenching and grinding, with clean surface, smooth dust removal function, accurate size and long service life.

Matching Tools: Drill, Impact Drill(drilling mode)

- 

135 degree split-point tip combines precise positioning and perfect centering with no derivation
- 

Self-centering function and no need of pilot punching
- 

Suitable for drilling in hard metal materials
- 

Manufactured in line with DIN 338 Every drill bit meets industrial performance and safety standards

Plastic Box Model	Art No.	Specification			Quantity/Pack(PCS)
		Diameter(mm)	Work Length(mm)	Full Length(mm)	
D-DB1.0-10P(G)	8001700001	1.0	12	34	10
D-DB1.5-10P(G)	8001700002	1.5	18	40	10
D-DB2.0-10P(G)	8001700003	2.0	24	49	10
D-DB2.5-10P(G)	8001700004	2.5	30	57	10
D-DB3.0-10P(G)	8001700005	3.0	33	61	10
D-DB3.2-10P(G)	8001700006	3.2	36	65	10
D-DB3.5-10P(G)	8001700007	3.5	39	70	10
D-DB4.0-10P(G)	8001700008	4.0	43	75	10
D-DB4.2-10P(G)	8001700009	4.2	43	75	10
D-DB4.5-10P(G)	8001700010	4.5	47	80	10
D-DB5.0-10P(G)	8001700011	5.0	52	86	10
D-DB5.2-10P(G)	8001700012	5.2	52	86	10
D-DB5.5-10P(G)	8001700013	5.5	57	93	10
D-DB6.0-10P(G)	8001700014	6.0	57	93	10
D-DB6.2-10P(G)	8001700077	6.2	63	101	10
D-DB6.5-10P(G)	8001700015	6.5	63	101	10
D-DB6.8-10P(G)	8001700085	6.8	69	109	10
D-DB7.0-10P(G)	8001700016	7.0	69	109	10
D-DB8.0-10P(G)	8001700017	8.0	75	117	10
D-DB8.5-10P(G)	8001700018	8.5	75	117	10
D-DB9.8-5P(G)	8001700079	9.8	87	133	5
D-DB10.0-5P(G)	8001700019	10.0	87	133	5
D-DB10.5-5P(G)	8001700020	10.5	87	133	5
D-DB11.0-5P(G)	8001700021	11.0	94	142	5
D-DB11.5-5P(G)	8001700022	11.5	94	142	5
D-DB12.0-5P(G)	8001700023	12.0	101	151	5
D-DB12.5-5P(G)	8001700024	12.5	101	151	5
D-DB13.0-5P(G)	8001700025	13.0	101	151	5

METAL DRILL BIT HSS-CO



DEVON metal drill bit HSS-Co has shiny surface, golden color, accurate size, long service life. Shaped through grinding, suitable for drilling in hard metals, special for stainless steel plates. Matching Tools: Drill, Impact Drill (drilling mode)

- 

135 degree split-point tip combines precise positioning and perfect centering with no derivation
- 

Self-centering function and no need of pilot punching
- 

Special for drilling in steel sheet
- 

Manufactured in line with DIN 338 Every drill bit meets industrial performance and safety standards

HSS-Co 5% Made of M35 steel, 5% cobalt, heat-resisting and wear-resisting

Plastic Box Model	Art No.	Specification			Quantity/Pack(PCS)
		Diameter(mm)	Work Length(mm)	Full Length(mm)	
D-DB1.0-10P(CO)	8001700026	1.0	12	34	10
D-DB1.5-10P(CO)	8001700027	1.5	18	40	10
D-DB2.0-10P(CO)	8001700028	2.0	24	49	10
D-DB2.5-10P(CO)	8001700029	2.5	30	57	10
D-DB3.0-10P(CO)	8001700030	3.0	33	61	10
D-DB3.2-10P(CO)	8001700031	3.2	36	65	10
D-DB3.5-10P(CO)	8001700032	3.5	39	70	10
D-DB4.0-10P(CO)	8001700033	4.0	43	75	10
D-DB4.2-10P(CO)	8001700034	4.2	43	75	10
D-DB4.5-10P(CO)	8001700035	4.5	47	80	10
D-DB5.0-10P(CO)	8001700036	5.0	52	86	10
D-DB5.2-10P(CO)	8001700037	5.2	52	86	10
D-DB5.5-10P(CO)	8001700038	5.5	57	93	10
D-DB6.0-10P(CO)	8001700039	6.0	57	93	10
D-DB6.2-10P(CO)	8001700078	6.2	63	101	10
D-DB6.5-10P(CO)	8001700040	6.5	63	101	10
D-DB6.8-10P(CO)	8001700086	6.8	69	109	10
D-DB7.0-10P(CO)	8001700041	7.0	69	109	10
D-DB8.0-10P(CO)	8001700042	8.0	75	117	10
D-DB8.5-10P(CO)	8001700043	8.5	75	117	10
D-DB9.8-5P(CO)	8001700080	9.8	87	133	5
D-DB10.0-5P(CO)	8001700044	10.0	87	133	5
D-DB10.5-5P(CO)	8001700045	10.5	87	133	5
D-DB11.0-5P(CO)	8001700046	11.0	94	142	5
D-DB11.5-5P(CO)	8001700047	11.5	94	142	5
D-DB12.0-5P(CO)	8001700048	12.0	101	151	5
D-DB12.5-5P(CO)	8001700049	12.5	101	151	5
D-DB13.0-5P(CO)	8001700050	13.0	101	151	5

CERAMIC DRILL BIT



DEVON ceramic drill bit has excellent drilling performance and steady quality. Carbide head of the bit is used for precise drilling.

It is suitable for drilling holes in brittle materials, such as glass, ceramics, granite, brick wall and ceramic tile.

Matching Tools: Drill, Impact Drill (drilling mode)



Suitable for drilling in tiles and ceramics



Suitable for drilling in glass

Plastic Box Model	Art No.	Specification		Quantity/Pack(PCS)
		Diameter(mm)	Full Length(mm)	
D-DB3.0-25P(C)	8001780009	3	60	25
D-DB4.0-25P(C)	8001780010	4	60	25
D-DB5.0-25P(C)	8001780011	5	61	25
D-DB6.0-25P(C)	8001780012	6	63	25
D-DB7.0-10P(C)	8001780013	7	65	10
D-DB8.0-10P(C)	8001780014	8	70	10
D-DB10.0-10P(C)	8001780015	10	80	10
D-DB12.0-10P(C)	8001780016	12	90	10

SPS-PLUS HAMMER DRILL BIT



DEVON SDS-plus hammer drill bit has excellent drilling performance and steady quality. The strong power and long service life ensure the high-efficiency and high-quality work performance of the rotary hammer, bringing good experience for users.


It is suitable for drilling in concrete, reinforced concrete, bricks and granite, etc.

Matching Tools: Rotary Hammer

- 

Suitable for drilling in concrete
- 

Suitable for drilling in brick walls
- 

SDS-plus quick change system
- 

Fast chip removal ensures efficient drilling

Plastic Box Model	Art No.	Specification			Quantity/Pack(PCS)
		Diameter(mm)	Work Length(mm)	Full Length(mm)	
D-HDB4(11)-1C(P)	8001900001	4	50	110	1
D-HDB5(11)-1C(P)	8001900002	5	50	110	1
D-HDB5(16)-1C(P)	8001900003	5	100	160	1
D-HDB6(11)-1C(P)	8001900004	6	50	110	1
D-HDB6(16)-1C(P)	8001900005	6	100	160	1
D-HDB6(21)-1C(P)	8001900006	6	150	210	1
D-HDB8(11)-1C(P)	8001900007	8	50	110	1
D-HDB8(16)-1C(P)	8001900008	8	100	160	1
D-HDB8(21)-1C(P)	8001900009	8	150	210	1
D-HDB10(11)-1C(P)	8001900011	10	50	110	1
D-HDB10(16)-1C(P)	8001900012	10	100	160	1
D-HDB10(21)-1C(P)	8001900013	10	150	210	1
D-HDB12(16)-1C(P)	8001900016	12	100	160	1
D-HDB12(21)-1C(P)	8001900017	12	150	210	1
D-HDB14(16)-1C(P)	8001900021	14	100	160	1
D-HDB14(21)-1C(P)	8001900022	14	150	210	1
D-HDB16(16)-1C(P)	8001900026	16	100	160	1
D-HDB16(21)-1C(P)	8001900027	16	150	210	1

SPS-PLUS HAMMER DRILL BIT

Plastic Tube Model	Art No.	Specification			Quantity/Pack(PCS)
		Diameter(mm)	Work Length(mm)	Full Length(mm)	
D-HDB12(25)-1P(P)	8001900018	12	190	250	1
D-HDB12(35)-1P(P)	8001900019	12	290	350	1
D-HDB14(25)-1P(P)	8001900023	14	190	250	1
D-HDB14(35)-1P(P)	8001900024	14	290	350	1
D-HDB16(31)-1P(P)	8001900028	16	250	310	1
D-HDB16(35)-1P(P)	8001900029	16	290	350	1
D-HDB18(21)-1P(P)	8001900031	18	150	210	1
D-HDB18(31)-1P(P)	8001900032	18	250	310	1
D-HDB18(35)-1P(P)	8001900033	18	290	350	1
D-HDB20(21)-1P(P)	8001900035	20	150	210	1
D-HDB20(31)-1P(P)	8001900036	20	250	310	1
D-HDB20(35)-1P(P)	8001900037	20	290	350	1
D-HDB20(50)-1P(P)	8001900038	20	440	500	1
D-HDB22(25)-1P(P)	8001900039	22	190	250	1
D-HDB22(35)-1P(P)	8001900040	22	290	350	1
D-HDB22(50)-1P(P)	8001900041	22	440	500	1

SDS-PLUS DEMOLITION HAMMER DRILL BIT



DEVON SDS-plus demolition hammer drill bit has sturdy shank and is long in service life, high in efficiency and convenient to change.

It's suitable for chiseling into walls, stones and concretes.

Matching Tools: Rotary Hammer (chiseling model); Demolition Hammer



Suitable for drilling in concrete



Suitable for drilling in brick walls



SDS-plus quick change system

Plastic Box Model	Art No.	Specification	Quantity/Pack(PCS)
		Length(mm)	
D-CHP14-1C(P)	8001900042	140	1
D-CHP14-1C(P)	8001900043	140	1

SOCKET

DEVON socket is produced by solid forging technology.
Matching Tools: Impact Wrench(1/2" square spindle)



Durability, long service life

Plastic Bag Model	Art No.	Specification		Quantity/Pack(PCS)
		Diameter(mm)	Length(mm)	
D-SO19(58)-1C	3810692001	19	58	1
D-SO22(58)-1C	3810634002	22	58	1

SCREWDRIVER BIT

DEVON screwdriver bit is made of S2 material, with high hardness, wear resistance, and impact resistance
Matching Tools: Drill, Impact Drill(drilling mode)



Strong magnetic bit
Hold screws firmly,
not easy to fall off



Shank shape: 1/4" Hex



Head type: PH2

Plastic Bag Model	Art No.	Specification		Quantity/Pack(PCS)
		Diameter(mm)	Length(mm)	
D-SO19(58)-1C	3810692001	19	58	1
D-SO22(58)-1C	3810634002	22	58	1

IMPACT SCREWDRIVER BIT

DEVON impact screwdriver bit adopts advanced heat treatment technology to ensure hardness. It is designed for screw tightening and loosening under high-torque and high-intensive working environment.
Matching Tools: Impact Driver, Drill, Impact Drill(drilling mode)



Strong magnetic bit Hold screws firmly, not easy to fall off



Shank shape: 1/4" Hex



Head type: PH2



Impact control to extend product life

Plastic Bag Model	Art No.	Specification	Quantity/Pack(PCS)
		Length(mm)	
D-ISB65-P	8001730003	65	10
D-ISB110-P	8001730008	110	10

RECIPROCATING SAW BLADE



DEVON reciprocating saw blade is imported from Switzerland and has good cutting performance and stable product quality.

The high efficiency and long service life ensure the efficient and high-quality work performance, bringing good experience for users.

Different materials and the expected performances are essential to our selection in saw blades. It's suitable for cutting pipes, profiles and wood.

Matching Tools: Reciprocating Saw



Suitable for drilling in tiles and ceramics



Suitable for drilling in glass

Plastic Box Model	Art No.	Specification				Quantity/Pack(PCS)
		Full Length(mm)	Width(mm)	Thickness(mm)	Tooth Pitch(mm)	
D-RSB-S922BF	8002040013	150(6")	19	0.9	1.8(14TPI)	Thick metal (3-8mm), Solid tube/ profile (diameter<100mm) Fast cutting
D-RSB-S922EF	8002040014	150(6")	19	0.9	1.4(18TPI)	Metal sheet (1.5-4 mm), Tube/ profile (diameter<100mm)
D-RSB-S1122BF	8002040015	225(9")	19	0.9	1.8(14TPI)	Thick metal (3-8mm), Solid tube/ profile (diameter < 175mm), Flexible, flush and fast cutting
D-RSB-S1122EF	8002040016	225(9")	19	0.9	1.4(18TPI)	Metal sheet (1.5-4mm), Tube/ profile (diameter < 175mm) Flexible and flush cutting
D-RSB-S711DF	8002040017	150(6")	19	1.25	4.3(6TPI)	Wood with nail/ metal, Aluminum plate (<100mm), Solid plastic / fiberglass reinforced plastic (<50mm) Special for curve cutting
D-RSB-S1411DF	8002040018	300(12")	19	1.25	4.3(6TPI)	Wood with nail/metal, Aluminum plate (<250mm), Fiberglass reinforced plastic/epoxy resin (<60mm)



DIAMOND SAW BLADE

DEVON diamond saw blade is made from single crystal and pure high-strength diamond, adopts ASP hot-burning and hot-pressing technology, and manufactures to the highest standard of European safety certification EN13236, which ensures high quality and safety use. It is suitable for cutting and slotting construction materials, such as concrete, sand stone material, wall bricks etc.

Matching Tools: Marble Cutter



Fast cutting experience



Long service life

Blister Model	Art No.	Type	Specification					Quantity/Pack(PCS)
			Diameter (mm)	Arbor Diameter (mm)	Segment Height (mm)	Thickness of Disc (mm)	Tooth Pitch (mm)	
D-CD114-B(CO)	8001800001	Concrete	114	20/16	12	2	1.2	1

CIRCULAR SAW BLADE



DEVON circular saw blade uses premium carbide tip with high efficiency and long durability. With built-in anti-vibration design, it can effectively reduce vibration and noise. It's suitable for cutting chipboards, plywood, and other various solid wood materials.

Matching Tools: Circular Saw



Long service life

Blister Model	Art No.	Specification				Quantity/Pack(PCS)
		Diameter (mm)	Arbor Diameter (mm)	Segment Height (mm)	Kerf (mm)	
D-CSB128-10G(W)	8002000001	128	20	16	1.6	1
D-CSB165(24)-1(W)	3810382004	165	20	24	1.6	1
D-CSB185(40)-1(W)	3810399010	185	20	40	1.6	1
D-CSB190(40)-1(W)	3810394008	190	20	40	1.6	1
D-CSB235(60)-1(W)	3810479001	235	25.4	60	2.6	1



GRINDING WHEEL

DEVON grinding wheel uses high-quality alumina abrasives and strong bonding agents to ensure excellent performance and long life when cutting or grinding metal or stainless steel. The fiber net in the inner layer will protect user during operation.

Matching Tools: Angle Grinder, Cut-off Saw



Long service life

Type: grinding wheel and cutting wheel

Grinding Wheel: mainly used to grind metals, matching with angle grinder

Cutting Wheel: mainly used to cut metals, matching with angle grinder or cut-off saw

Blister Model	Art No.	Specification			Quantity/Pack(PCS)
		Diameter (mm)	Thickness (mm)	Arbor Diameter (mm)	
D-GW100G-5S(M)	D-GW100G-5S(M)	100	6	16	5
D-GW125G-5S(M)	D-GW125G-5S(M)	125	6	22.2	5
D-GW125C-50S(S)	D-GW125C-50S(S)	125	1.2	22.2	5
D-GW100C-5S(M)	D-GW100C-5S(M)	100	2	16	5
D-GW102G-10S(S)	D-GW102G-10S(S)	102	2.8	16	10
D-GW105C-10S(S)	D-GW105C-10S(S)	105	1.2	16	10
D-GW355C-5S(M)	D-GW355C-5S(M)	355	3	25.4	5

ACCESSORY SET



DEVON accessory sets are made from premium materials, with various combinations to meet customers' demands



Multiple accessory sets meet different work requirements

Model	Art No.	Description	Quantity/Pack(PCS)
D-SBSD8C	8001730005	100mm electroplating magnetic slim bit (8): PH0/PH1/PH2, SL3/SL4/SL5, T10/T15	8
D-DBSA-15P	8002200001	hammer drill bit (4): 6/8/10/12mm×160mm; twist drill bit (4): 3/4/5/6mm; woodworking drill bit (4): 4/5/6/8mm ; double-ended screwdriver bit (1): 110mm; demolish hammer drill bit (2): 140mm flat chisel, 140mm point chisel	15
D-DBSB-4P	8002200006	hammer drill bit (4): 6/8/10/12mm X 160mm	4
D-DBSC-5P(M)	8002200007	impact masonry drill bit (5): 4/5/6/8/10mm	5
D-DBSC-5P(G)	8002200008	twist drill bit (5): 4/5/6/8/10mm	5
D-DBSC-5P(W)	8002200009	woodworking drill bit (5): 4/5/6/8/10mm	5
ACC75P	8002200010	ceramic drill bit (2): 6/8mm impact masonry drill bit (2): 6/8mm woodworking drill bit (2): 6/8 mm twist drill bit (2): 5/6mm 1-inch bit (12): PH1/PH1/PH2/PH2/PH3/PH3, SL5/SL5/SL6/SL6/SL7/SL7 socket (4): 5/6/8/10mm magnetic extension rod (1): 60mm expansion tube+ expansion screw (40): 8mm, 6mm	75
D-SBSA-15P	8002200016	2-inch bit (5): PH1/PH2, SL4.5/SL5.5/SL6 1-inch bit (10): PH1/PH2, PZ1/PZ2/PZ3, T10/T15/T20/T25/T30	15
D-SBSC-32P	8002200017	1-inch bits(30): Ph1/PH2/PH2/PH3, PZ1/PZ2/PZ2/PZ3, SL3/SL4/SL5/SL6, H3/H4/H5/H6, T10/ T15/T20/T25/T27/T30/T40, TT10/TT15/TT20/TT25/TT27/TT30/TT40 magnetic extension rod (1): 60mm socket adapter (1): 1/4"	32
ACC24P	8000000165	1-inch bits (19):PH0/PH1/PH2/PH2/PH3, SL3/SL4/SL5/SL6/SL6/SL7, PZ0/PZ1/PZ2/PZ3, H2/H3/H4/H5 socket (4): 5/6/7/8mm magnetic extension rod (1): 60mm	24
D-GWSA-2S	2825236001	grinding wheel(2): 100mm grinding wheel, 105mm cutting wheel	2

MEGNETIC BIT HOLDER



DEVON magnetic bit holder is slim and provides better sight. It's suitable for long screw, deep hole, narrow space and other work conditions unsuitable for hand holding
Suitable for DEVON slim screwdriver bits with greater magnetism and stable performance



Strong magnetic bit Hold screw firmly, not easy to fall off

Plastic Bag Model	Art No.	Specification		Quantity/Pack(PCS)
		Diameter (mm)	Length (mm)	
D-BG-1C	8001730004	10	25	1

CHUCK



DEVON chuck is characterized by key-typed metal three-clawed bit for stable holding, less skidding and convenient operation.

It's suitable for drilling holes in metal and other works requiring large torque.

Matching Tools: Rotary Hammer (SDS-plus)



Long service life

Color Box Model	Art No.	Specification	Quantity/Pack(PCS)
		Diameter (mm)	
D-CS13-1G	8002200003	1.5-13	1

WORK TABLE



X-Board work table: large size table, comfortable operation. Folding storage, convenient transportation. High strength support feet, bearing 150kg. Variety of accessories, support expansion function.

Model	Art No.	Specification			Quantity/Pack(PCS)
		Length(mm)	Width (mm)	Height(mm)	
D-RT710-1G	8002200044	610	710	810	1



DUST EXTRACTION ATTACHMENT

Work without dust using the DEVON Dust Extractor for DEVON 20V Rotary Hammers. This attachment connects quickly and securely for reliable dust collection. Replaceable brush rings let you optimize performance for various bit sizes, while the tough, rubber seal maximizes suction to isolate and trap dust particles.

Model	Art No.	Specification		Quantity/Pack(PCS)
		Maximum diameter (mm)		
D-CSB128-10G (W)	8002000001	68		1



TOOL BOX / TOOL BAG

DEVON tool box and tool bag, made from premium materials, are sturdy and durable and provide storage and protection for tools, accessories and various equipments.



Tool bag: realizes easy and convenient carriage



Tool box: provides easy and convenient carriage and effective protection

Model	Art No.	Specification			Description	Quantity/Pack(PCS)
		Length(mm)	Width (mm)	Height(mm)		
D-B18-1C	8002200013	330	270	230	Tool bag: thick material for larger load-bearing, reasonable design, convenient storage	1
D-B18-1S	8002200004	463	380	175	Tool box: built-in three-tired sponange cushion for shatter-resistance and pressure-resistance and all-round protection	2
D-TB136-1	2520908002	442	357	151	Tool box: imported with original packaging, double-handle design, convenient to pile up and carry around	1

GLOBAL MANUFACTURING



Chervon Europe Factory
in Steinheim, Germany

Chervon Vietnam
Factory in Binh Duong
province, Vietnam


CHERVON Auto
in Nanjing, China

Chervon Industry
in Nanjing, China

120
PRODUCTION
LINES

4
PRODUCTION
SITES

>16 MILLION
ANNUAL
PRODUCTION
CAPACITY

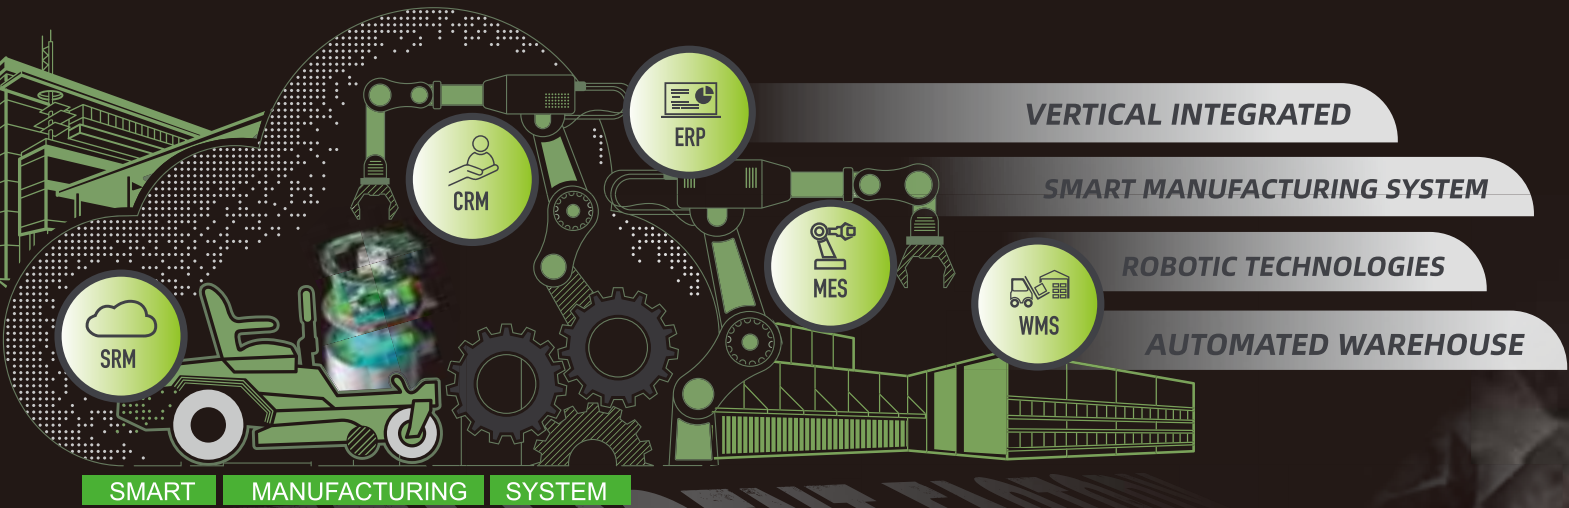

3,600+ patents granted world-wide
as of the end of 2022



R&D INNOVATION



R&D

QUALIFICATIONS AND HONORS



POWER TOOL



OUTDOOR POWER EQUIPMENT

MEMBERS OF NATIONAL/INTERNATIONAL STANDARD COMMITTEES

IEC TC 116 all work groups(WG7,WG8,WG9,WG11,JWG12)
UL STP 745, 2595, 62841, 82, 2743, 1576
GB SAC/TC 68 and SAC/TC 68 SC1
ISO TC 23 SC 17 WG4/WG5 and TC23 SC13 WG13

CERTIFIED LABORATORY



CNS(China National Accreditation Service for Conformity Assessment)



VDE Qualified Laboratory



TUV Rheinland Qualified Laboratory



UL Qualified Laboratory

Global supplier of power tool and outdoor power equipment

No. 1
in China

Global
leader

BETTERTOOLS

Continuous
innovation

BETTERWORLD

IDEA

VISION AND MISSION

**Better Tools.
Better World.**

Providing **superior products** to users worldwide through **continuous innovation**, we are determined to become a **global leader** in power tools and outdoor power equipment in the lithium-ion, intelligent and digital era.



DEVON[®]

**BETTER TOOLS
EASIER WORK**

Dealer Contact Information

<https://www.devon.com.cn/>

Specification for reference only. Subject to product appearance, design and technical modifications without prior notice.

2023 V1.0

DEVON大有官方旗艦店 DEVON.COM.HK