

# Setup Instructions

## Casonara 100L Backlit Counter



### GENERAL INFORMATION

Thank you for choosing All4Displays!

Please check our **Wavelight** playlist on the All4Displays YouTube channel for quick instructional videos on this display style.

**WARNING: Do not plug in the LED light arrays until they are fully extended on the frame.**

For additional information please feel free to call us at 1.844.947.4777 or visit our website at All4Displays.com.

### TOOLS


No tools required

### PARTS

(A) 12x frame poles:




(B) 8x corner assemblies



(C) 2x cable harnesses



(D) 4x LED light arrays

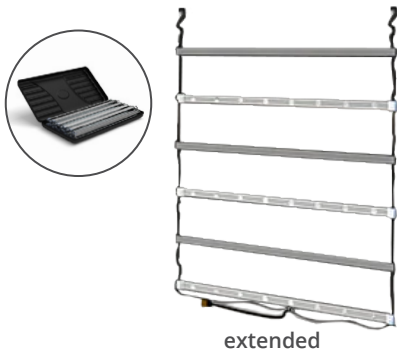

(E) 2x pvc panels



(F) 1x fabric graphic



(G) 4x column feet




(H) 2x power supply boxes




### STEP 01

Assemble the frame poles with bungee cords (A) by pressing button and pushing together.

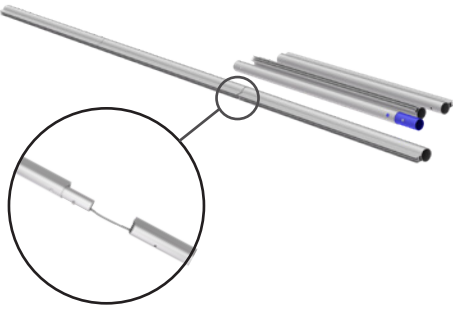


### STEP 02

Connect all corner assemblies (B) to frame poles (A) to make the top and bottom frame sections. Match colors on the pipes when connecting.

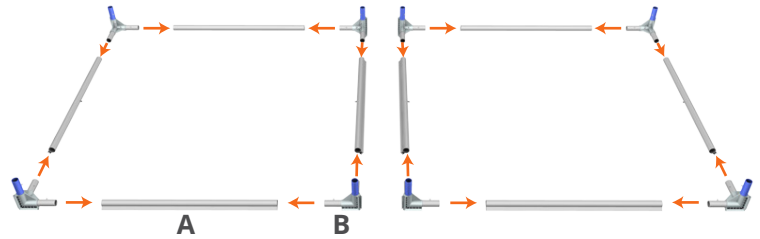


### STEP 03

Use the remaining frame poles (A) to connect the top and bottom frame sections.

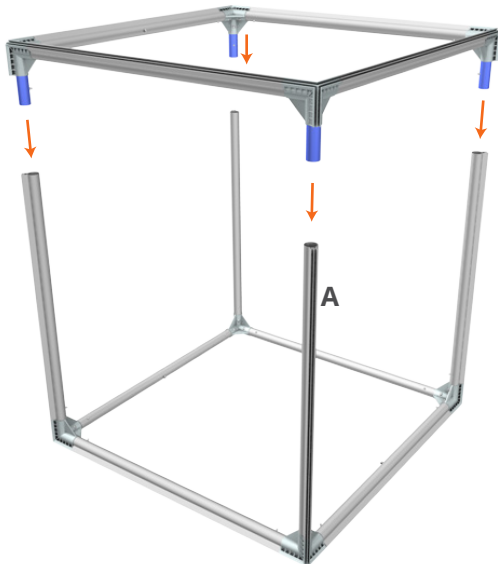

### STEP 04

Attach the cable harnesses (C) to the holes in the corner assemblies at the top of the frame. When complete, the harnesses should form an X.

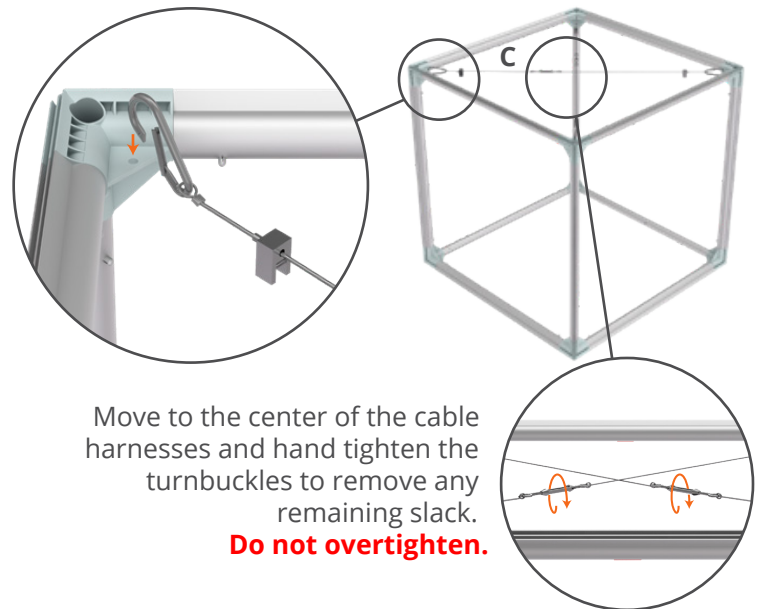

### STEP 05

Remove the LED light arrays (D) from the case and hook them onto the cable harness clips at the top of the frame.

Carefully unroll the light arrays. Repeat until all four light arrays are attached.

The LED light arrays hang under their own weight in the final upright position.



**STEP 06**


Fit the pvc panels (E) onto the top of the frame with the wedge side face down. Position and align the panels until they sit squarely in the frame.

**STEP 07**


Drape the fabric graphic (F) over the frame and gently pull down towards the bottom of the counter frame on all sides.

**STEP 08**

To complete the installation of the fabric graphic, gently place the counter on its side.

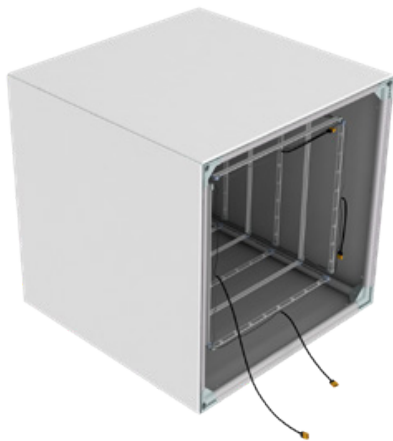**STEP 09**

Start in one corner of the frame and push the silicone edge of the fabric graphic into the outside bottom channel. Insert the silicone edge for about 6 inches in both directions from the corner. Repeat on all corners.

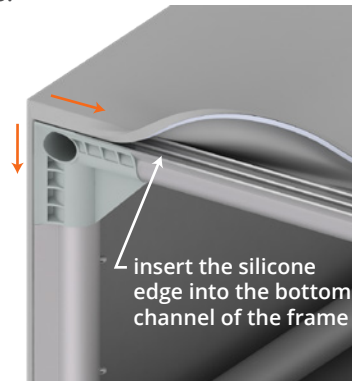**STEP 10**

Continue inserting the silicone edge of the fabric graphic into the frame working towards the center of the frame on each side. Do not over pull or stretch.


**STEP 11**

Insert feet (G) into all 4 corners of the frame base.



**STEP 12**

Attach up to 2x LED Light Arrays (D) to each power supply box (H). Stand counter into upright position over the top of the power supply box with power cord showing.

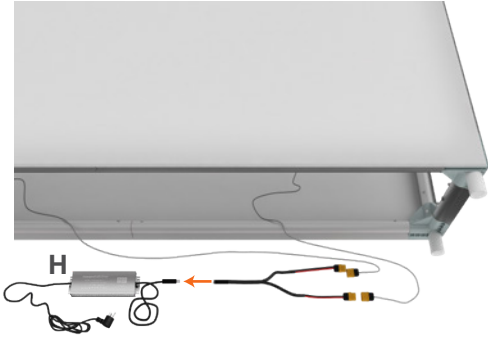**STEP 13**

Move counter into position and plug power cord into outlet to illuminate the display. Complete.

