

ROMAN BLIND FITTING INSTRUCTIONS

Your new Roman Blind has been custom built for you from the highest quality materials please follow the installation instructions provided.

HARDWARE

Please note : Screws are not supplied for bracket fixings and are dependent on the surface to which you are fixing please see chart below for recommended guide :

| FIXTURE GUIDE | RECOMENDED (Philips head) |
|---------------|---------------------------------------|
| Wood | 20mm 8 gauge |
| Steel | 6mm 6 gauge |
| Ceiling | Toggle Bolt |
| Plasterboard | Wall mates |
| Aluminium | 6mm 8 gauge or tech screw |
| Brick | Green plug & 38mm 8 gauge self tapper |

1. Depending on if your blind is face fit or recess fit place the brackets in position, and with a pencil mark the surface of the wall or window recess for drilling screw holes. Brackets should be positioned at each end of the head rail and spread intermediately across the width as



Brackets

required approx 110m apart.

NOTE If you are fixing your Romans within the recess make sure you leave adequate distance from the window surface for your blind to gather when pulled up.

2. When you are happy that you have correct positions for the brackets pre drill the screw holes and fix brackets securely.
3. On the top of the head box you will see a lip/groove which locks into place on the front edge of the bracket, then push the head rail backwards and the rear of the head rail fully up to lock the blind into the brackets securely.

4. Secure the safety cleat supplied, firmly to the wall at the appropriate position to keep tension on the control chain and avoid a choking hazard.

It is important to keep chains and cords safely away from children your new blind will have a safety warning tag attached please read carefully and do not remove.



Safety Cleat

5. To operate your new blind use chain control to lift and lower, using a steady tension and movement and avoid jerking or tugging of the chain.
6. Your blind is now installed and ready. We hope it brings you and your home many years of great functionality and beauty. We thank you for your purchase.

IMPORTANT INFORMATION



WARNING

ALL WINDOW COVERINGS WITH CORD OR CHAIN

Installation instructions

To avoid strangulation hazard, all internal window coverings with cord/ chain controls must have a child safety device installed where the cord has the possibility of forming a loop of 220mm or longer and it is at a height of less than 1600mm above floor level

To avoid creating a possible strangulation hazard for children , the corded internal window covering must be installed in such a way that the loose cord cannot form a loop of 220mm or longer at a height of less than 1600mm from floor level.

When using a cleat (Style 1) to secure the cord it must be at least 1600mm from floor level because a child is capable of unwinding a cord from a cleat. Please wind cord in a figure 8 dimension as indicated on Style 1 diagram.

A cord guide (Style2) may be installed lower than 1600mm above floor level if the cord is sufficiently secured or tensioned to prevent a loop 220mm or longer from being formed. If the cord is installed lower than 1600mm from floor level it must be designed to prevent a child from being able to remove the cord.

Making Blinds and Curtains Safer for Children

Blinds and curtain cords can be made safer in the following way:

Attach a Safety Device (enclosed)


Attach a cleat (Style 1) to the wall or window frame 1600mm or higher from the floor away from children or pets and wrap around the cleat.

- 1) Affix cleat with screws as shown
- 2) Wind loose cord around safety cleat


Attach a cord guide (Style 2)

- 1) Affix cord guide with screws as shown
- 2) Secure cord in cord guide at all times

Style 1 - Cleat

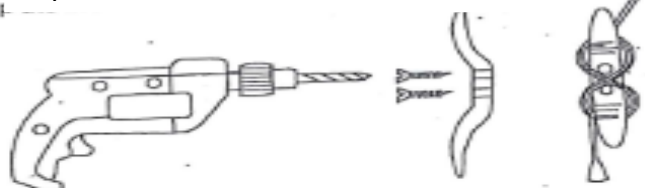

Style 2 - Cord guide

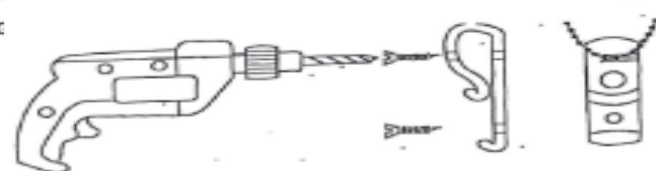

'WARNING: CURTAIN AND BLIND CORDS HAVE CAUSED THE DEATH OF YOUNG CHILDREN AND MUST BE INSTALLED SO THAT THEY ARE NOT A STRANGULATION HAZARD. FOLLOW THE INSTALLATION INSTRUCTIONS'.