

3CCT & 5CCT LED Downlight

DESCRIPTION

3CCT & 5CCT LED recessed downlights are designed to replace 4" or 6" CFL or incandescent downlights in many existing housings. Field adjustable CCT allows to choose your most favorite environment color temperature without changing the lamp. 3 color covers and smooth/baffle trim options give the flexibility to customize the aesthetic look of the fixture.

FEATURES

- 3CCT & 5CCT selectable
- Smooth trim and baffle trim options
- 3 color cover trims options
- Damp locations
- E26 base socket adapter included
- Lifespan > 50,000hrs

ELECTRICAL


- Input Voltage: 120-277 VAC
- Triac Dimmable
- Power Factor: 0.9
- THD: <20%

CONSTRUCTION

- Aluminum housing
- PC lens

LISTINGS

- ETL Listed
- Energy Star

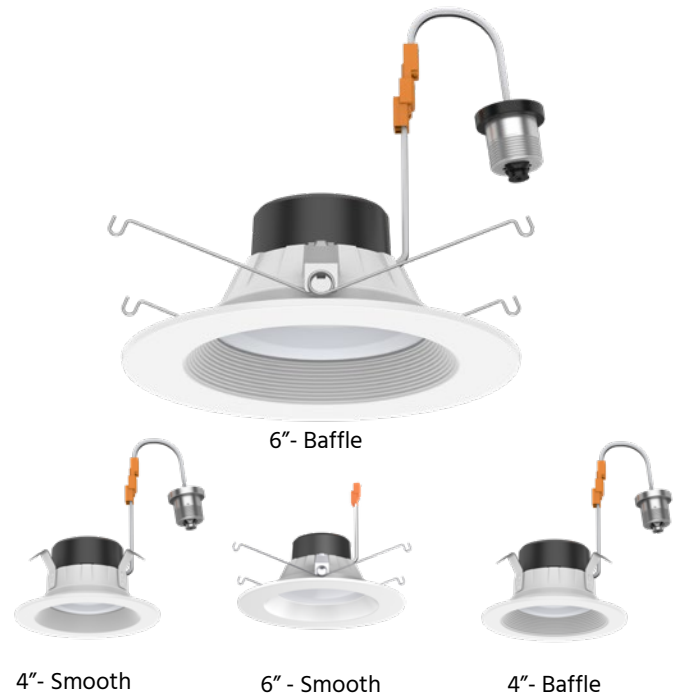

APPLICATIONS

- Ideal for retrofit applications at Home, Supermarket, Corridors, Offices, Hospitality, Retail, etc.

PERFORMANCE SUMMARY

Item #	Wattage	Lumens	LPW	Volt	CCT	CRI	DIM	Beam Angle
DL347-4-10W-P3	10W	830LM	83LMW	120-277V	3000K/4000K/5000K Selectable	>80/90	Triac	100°
DL347-6-10W-P3	10W	860LM	86LMW	120-277V	3000K/4000K/5000K Selectable	>80/90	Triac	100°
DL347-6-15W-P3	15W	1580LM	105LMW	120-277V	3000K/4000K/5000K Selectable	>80/90	Triac	100°
DL347-4-10W-P5	10W	830LM	83LMW	120-277V	2700K/3000K/3500K 4000K/5000K Selectable	>80/90	Triac	100°
DL347-6-10W-P5	10W	860LM	86LMW	120-277V	2700K/3000K/3500K 4000K/5000K Selectable	>80/90	Triac	100°
DL347-6-15W-P5	15W	1580LM	105LMW	120-277V	2700K/3000K/3500K 4000K/5000K Selectable	>80/90	Triac	100°

Remarks: All above efficacy and lumens are subject to CRI80 @4000K, CRI90 is less 10-15%, please check IES files for accurate data.

PRODUCT DETAILS




3CCT Selectable
(3000K/4000K/5000K)




5CCT Selectable
(2700K/3000K/3500K/4000K/5000K)

ADDITION ACCESSORIES


Color trims (Field Installable)



Black

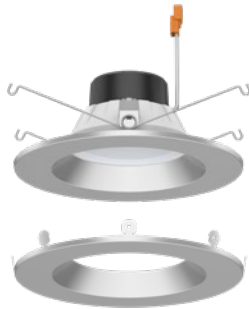


Silver

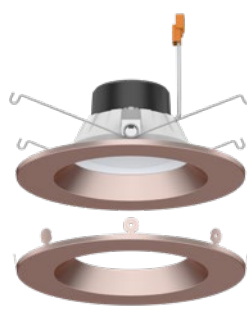

Golden

PRODUCT DIMENSION

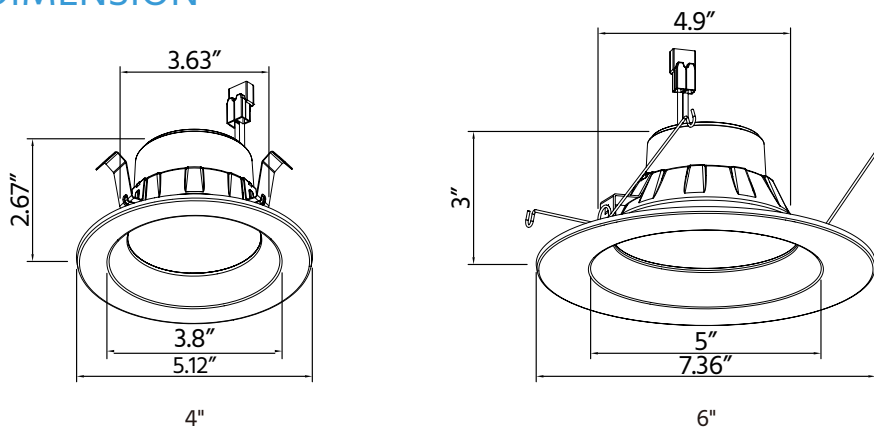

PACKING INFO

Model No.	Product Size(inch)	Carton Size (cm)	PCS/CTN	Product Weight (Kg)		Package weight (Kg)		20GP (PCS)	40HQ (PCS)
				N.W/PC	G.W/PC	N.W/CTN	G.W/CTN		
DL347-4-10W	4"	56*28*24.5	24	0.16	0.22	3.85	6.3	17880	41520
DL347-6-10W	6"	59*40*36	24	0.25	0.36	6	10	7584	18528
DL347-6-15W	6"	59*40*36	24	0.25	0.36	6	10	7584	18528
4" Cover	-	29.5*29.5*16	96	0.03	0.035	2.88	4.2	181248	433920
6" Cover	-	40.5*29.5*22	96	0.04	0.048	3.84	5.6	107232	244800