

## JustRight LED


## Bi-directional Adjustable LED

LED Overbed Light emulates traditional bi-directional fluorescent fixtures used throughout hospitals and general medical/nursing industry.

### General

Two diffuser panels direct light down, up, or in both directions; 40W downlight, 20W uplight, or 60W altogether. A convenient indicator nightlight is provided for easily locating pull chain switches at night. Two pull chain switches provided for controlling nightlight and switching between lighting modes. Each pull chain is provided with a string extension to customize the chain length and providing easier access for bed occupants with limited mobility.


The overall fixture can be further dimmed down to 10% using standard 0-10v DC dimming systems. 120-347V universal power supply and adjustable color temperature are standard. Custom configurations are available. Contact us for details. Backed up by five (5) year extendable limited warranty.

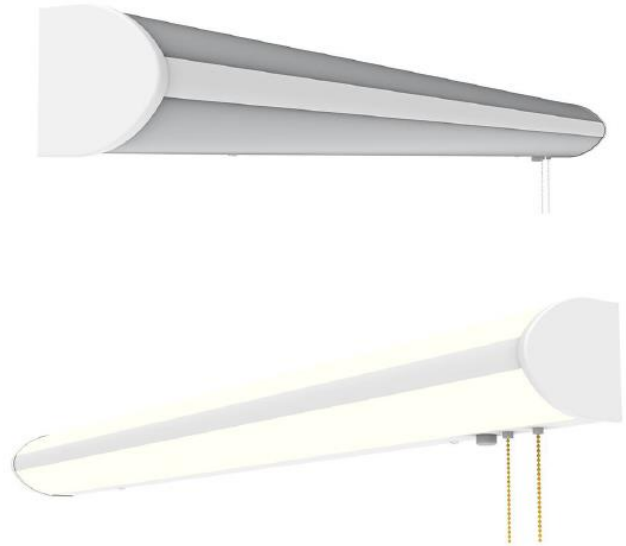

Independently control upper and lower light panels



Indicator nightlight to easily locate pull chain location in the dark

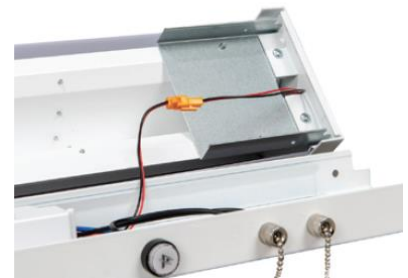

Easily disconnect lens assembly from Backplate during installation

### Key Features

- Wall Flush Mounted
- Up Lighting, Down Lighting, Up+Down Lighting (\*)
- Extruded aluminum painted white
- Parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel
- Polycarbonate milky diffuser is snapped into housing
- Surge protector
- Class II/P driver, 0-10V dimming as standard
- 120-347VAC universal power supply
- Light Color (CCT) Adjustable
- 50,000+ Hours LED Life Expectancy
- Power factor: >0.9
- 5 Year Extendable Warranty
- Damp locations
- UL, cUL listed
- Ambient Temperature: -30 ~ 40 °C (-22°F to +104°F)

\*Contact plant for custom modifications and accessories




Scan QR Code to get more information about our Products, IES Files and Photometric Reports. All information is subject to change without notice. ® are Registered Trademarks of their respective owners. ©2023 BDS Industrial Solutions Inc. All rights reserved. Rev. 05/23

# Overbed Light

# OBL



Back panel provides knockout options at center and towards both ends

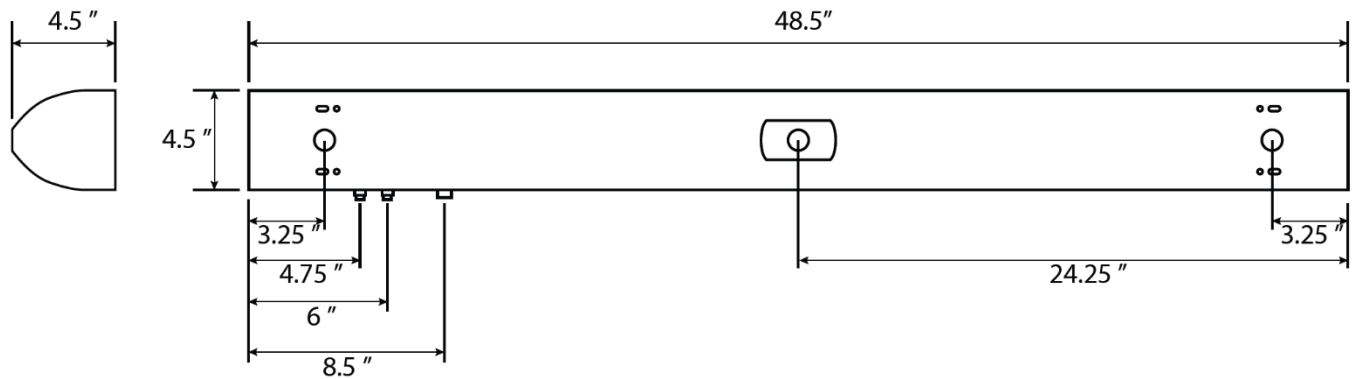

ORDER CODE (STANDARD*)		OBL-4FT-ZV-AK
Luminaire Type	OBL	Overbed LED Light Fixture
Luminaire 4000K	4FT	4FT, White color
Size Configuration	ZV	120-347V
Input Voltage (VAC)	AK	CCT Adjustable (2700-400K)
Light Color		60W (20W upwards / 40W downwards)
Power (W)		7,690Lm
Delivered Lumen (Lm)		123Lm/W
Efficiency (Lm/W)		H108.5 V219.8
Beam Angle		>90
Power Factor (PF)		>80
Color Rendering Index (CRI)		



Scan QR Code to get more information about our Products, IES Files and Photometric Reports.  
 All information is subject to change without notice. © are Registered Trademarks of their respective owners.  
 ©2023 BDS Industrial Solutions Inc. All rights reserved. Rev. 05/23

[info@bdsindustrial.com](mailto:info@bdsindustrial.com) | 604-435-1879 | [www.bdsindustrial.com](http://www.bdsindustrial.com)

