

JustRight LED

LED vapor tight fixtures are wet location rated commercial strip lights that are sealed against dust and moisture. For specialty applications that require sealed and gasketed components, vapor tight fixtures are the perfect choice to provide energy efficient light. Constructed with impact-resistant lenses and corrosion-proof housing, these industrial strip lights are protected against extreme weather and rust in the harsh environments.



General

Polycarbonate housing and lens with stainless steel hardware make this fixture the right choice for most general applications. User can select Wattage output at time of installation, thus reducing number of models required for a project.

120-347V universal power supply and adjustable color temperature are standard. Custom configurations are available. Contact us for details. Backed up by five (5) year extendable limited warranty.



120-347V



Key Features

- Surface or Suspended Mounted
- Stainless hardware
- Polycarbonate housing
- Polycarbonate lens
- Quick release latches
- Wiring knock outs on either end of fixture
- Surge protector
- Class II/P driver, with 0-10V or Triac dimming as standard
- 120-347VAC universal power supply
- Wattage and Light Color (CCT) Adjustable
- 50,000+ Hours LED Life Expectancy
- Power factor: >0.98
- 5 Year Extendable Warranty
- Damp and Wet locations
- UL, cUL listed
- Ambient Temperature: -20 ~ 55 °C (-4°F to +131°F)

Applications


- Car Washes / Food Processing
- Gas Stations / Laboratories
- Parking Garages / Utility
- Industrial Facilities
- Refrigerators / Freezers
- Warehouses / Supermarket

***Contact plant for custom modifications and accessories**




Scan QR Code to get more information about our Products, IES Files and Photometric Reports.
All information is subject to change without notice. ® are Registered Trademarks of their respective owners.
©2023 BDS Industrial Solutions Inc. All rights reserved. Rev. 05/23

Light Distribution

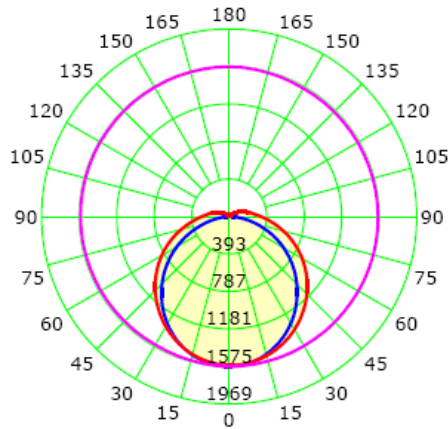

Mounting

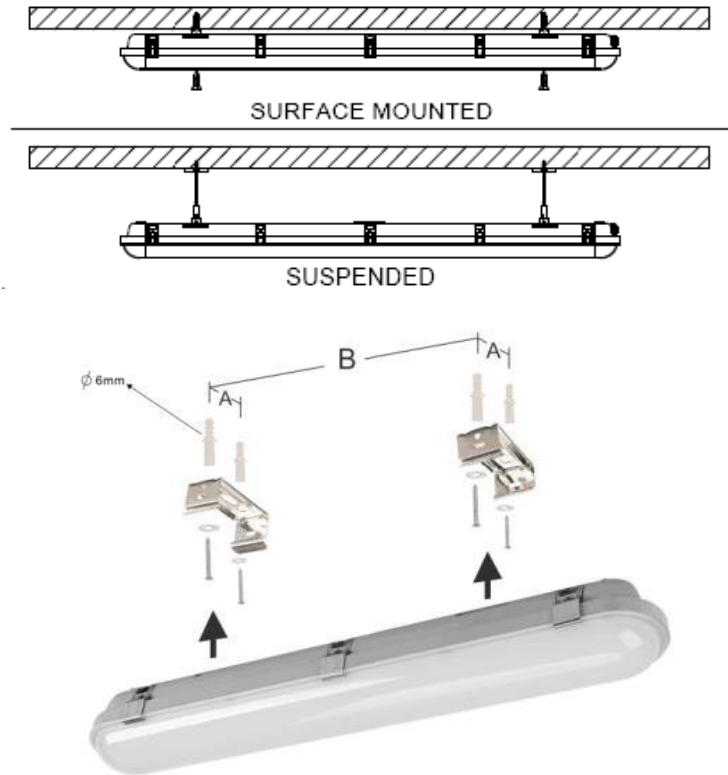

Specifications

Model	Wattage	CCT	CRI	Voltage	Efficacy	Lumens	Dimensions
VTL-2FT-25W	25/20/15W	3500-5000K	80+	120-347V	130lm/W	3,250lm	23.2" x 4.9" x 3.6"
VTL-4FT-40W	40/30/20W	3500-5000K	80+	120-347V	130lm/W	5,200lm	47.2" x 4.9" x 3.6"
VTL-4FT-60W	60/50/40W	3500-5000K	80+	120-347V	130lm/W	7,800lm	47.2" x 4.9" x 3.6"
VTL-8FT-80W	80/70/60W	3500-5000K	80+	120-347V	130lm/W	10,400lm	94.5" x 4.9" x 4.0"
VTL-8FT-100W	100/90/80W	3500-5000K	80+	120-347V	130lm/W	13,000lm	94.5" x 4.9" x 4.0"

Ordering Information

sample order: VTL-4FT-40W

VTL - - - - -					
MODEL	WATTAGE	VOLTAGE	LIGHT COLOR	LENS	ACCESSORIES
2FT (2' long)	25W (for 2')	Blank	Blank	Blank	Blank (No Accessories)
4FT (4' long)	40W (for 4')	(120-347V)	(3500-5000K)	(Diffused)	WC (Wire cage)
8FT (8' long)	60W (for 4')	* (Custom)	* (Custom)	CL (Clear)	MS (Motion Sensor)
	80W (for 8')			XL (No Lens)	EB (Emergency Backup)
	100W (for 8')			* (Custom)	* (Custom)

*Contact plant for custom modifications and accessories



Scan QR Code to get more information about our Products, IES Files and Photometric Reports.
All information is subject to change without notice. ® are Registered Trademarks of their respective owners.
©2023 BDS Industrial Solutions Inc. All rights reserved. Rev. 05/23

info@bdsindustrial.com | 604-435-1879 | www.bdsindustrial.com

