






ROUND SLINGS POLYESTER – ENDLESS

Rated Capacity (lbs.)

Size	STD Color	Approx. DIA/Inch	Approx. WT/Foot	 Vertical	 Choker	 Basket
1	PURPLE	0.60	0.30	2,600	2,100	5,200
2	GREEN	0.80	0.40	5,300	4,200	10,600
3	YELLOW	1.00	0.50	8,400	6,700	16,800
4	TAN	1.20	0.60	10,600	8,500	21,200
5	RED	1.30	0.80	13,200	10,600	26,400
6	WHITE	1.40	0.90	16,800	13,400	33,600
7	BLUE	1.55	1.20	21,200	17,000	42,400
8	ORANGE	1.75	1.50	25,000	20,000	50,000
9	ORANGE	1.95	2.00	31,000	24,800	62,000
10	ORANGE	2.35	2.80	40,000	32,000	80,000





WEB SLINGS EYE & EYE Class 7 - 1 & 2-PLY TYPE I,II, III & IV

Rated Capacity (lbs.)

EYE & EYE TYPE I, II, III & IV	 Vertical	 Choker	 90°	 60°	 45°	 30°
EE1-91	1,600	1,250	3,200	2,750	2,250	1,600
EE2-91	3,100	2,450	6,200	5,350	4,350	3,100
EE1-92	3,100	2,450	6,200	5,350	4,350	3,100
EE2-92	6,200	4,950	12,400	10,700	8,750	6,200
EE1-93	4,700	3,750	9,400	8,100	6,600	4,700
EE2-93	8,800	7,000	17,600	15,200	12,400	8,800
EE1-94	6,200	4,950	12,400	10,700	8,750	6,200
EE2-94	11,000	8,800	22,000	19,050	15,550	11,000
EE1-96	9,300	7,400	18,600	16,100	13,150	9,300
EE2-96	16,500	13,200	33,000	28,550	23,300	16,500


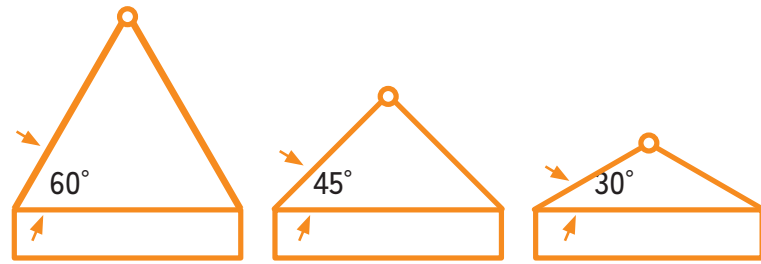


WIRE ROPE SLINGS 6 x 19 & 6 x 37 – EIPS

Rated Capacity (lbs.)

Rope Dia.	 Vertical	 Choker	 Vertical Basket	 60°	 45°	 30°
1/4"	1,300	960	2,600	2,200	1,820	1,300
3/8"	2,800	2,200	5,800	5,000	4,000	2,800
1/2"	5,000	3,800	10,200	8,800	7,200	5,000
5/8"	7,800	5,800	15,600	13,600	11,000	7,800
3/4"	11,200	8,200	22,000	19,400	15,800	11,200
7/8"	15,200	11,200	30,000	26,000	22,000	15,200
1"	19,600	14,400	40,000	34,000	28,000	19,600
1-1/8"	24,000	18,200	48,000	42,000	34,000	24,000
1-1/4"	30,000	22,000	60,000	52,000	42,000	30,000
1-1/2"	42,000	32,000	84,000	74,000	60,000	42,000

CHAIN SLINGS GRADE 100 ALLOY STEEL

Rated Capacity (lbs.)

Size of chain (in.) (mm.)		 Single	 Double Chain Slings			 Triple and Quad.	 Triple and Quad.
9/32	7	4,300	7,400	6,100	4,300	11,200	9,100
3/8	10	8,800	15,200	12,400	8,800	22,900	18,700
1/2	13	15,000	26,000	21,200	15,000	39,000	31,800
5/8	16	22,600	39,100	32,000	22,600	58,700	47,900
3/4	20	35,300	61,100	49,900	35,300	91,700	74,900
7/8	22	42,700	74,000	60,400	42,700	110,900	90,600
1	26	59,700	103,400	84,400	59,700	155,100	126,600

RIGGING HARDWARE CAPACITIES

Rated Capacity (lbs.)

Size in Inches	Carbon SPA Shackle	Shoulder Eye Bolts Vertical 45 Deg.		Turnbuckle Eye/Jaw	WIRE ROPE CLIPS		
					Min. Clips	Turnback in Inches	Torque in Ft. Lbs.
1/4"	1,000	500	125	500	2	4-3/4"	15
5/16"	1,500	900	225	800	2	5-1/4"	30
3/8"	2,000	1,300	325	1,200	2	6-1/2"	45
1/2"	4,000	2,400	600	2,200	3	11-1/2"	65
9/16"	-----	-----	-----	-----	3	12"	95
5/8"	6,500	4,000	1,000	3,500	3	12"	95
3/4"	9,500	5,000	1,250	5,200	4	18"	130
7/8"	13,000	7,000	1,750	7,200	4	20"	225
1"	17,000	9,000	2,250	10,000	5	26"	225
1-1/8"	19,000	12,000	3,000	-----	6	34"	225
1-1/4"	24,000	15,000	3,750	15,200	7	37"	360

ASME SAFETY STANDARDS FOR LIFTING

OSHA REGULATORY STANDARDS

B30.2 Overhead and Gantry Cranes

B30.9 Slings

B30.10 Hooks

B30.20 Below-the-Hook Lifting Devices

B30.21 Manually Lever Operated Hoists

B30.23 Personnel Lifting Systems

B30.26 Rigging Hardware

Location & Contact Information

Warehouse Address:
Maskell Rigging
2195 Railroad St. Corona,
CA 92878

Mailing Address:
PO BOX 2648 Corona, CA
92878

Phone: (951) 900-7460

Fax: (951) 900-7470

Toll Free: (888) 715 - RIGG (7444)

website: www.maskell-rigging.com



Catalog Download

For reference material only. Check rated capacity on rigging hardware before each lift.
Always verify manufacturer's information prior to use.

www.maskell-rigging.com

Leading in quality service since 1975.