

Ma*i*[®]
CLIMBER
»XL
FULL-BODY WORKOUT

AS SEEN ON
TV




UPPER PULLEYS (#56) KIT
SKU 400-002-385

PART #56
REPLACEMENT MANUAL

PART #56 REPLACEMENT MANUAL


STEP 1

Place pistons (34) in the cylinder bracket (45).

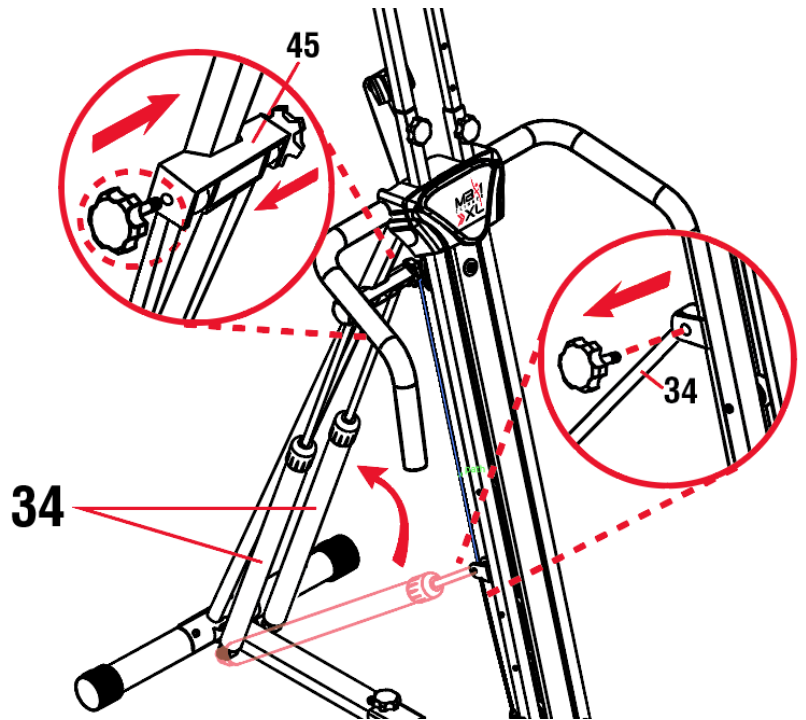


STEP 2

Remove the upper handlebars (11) by removing the knob (49).

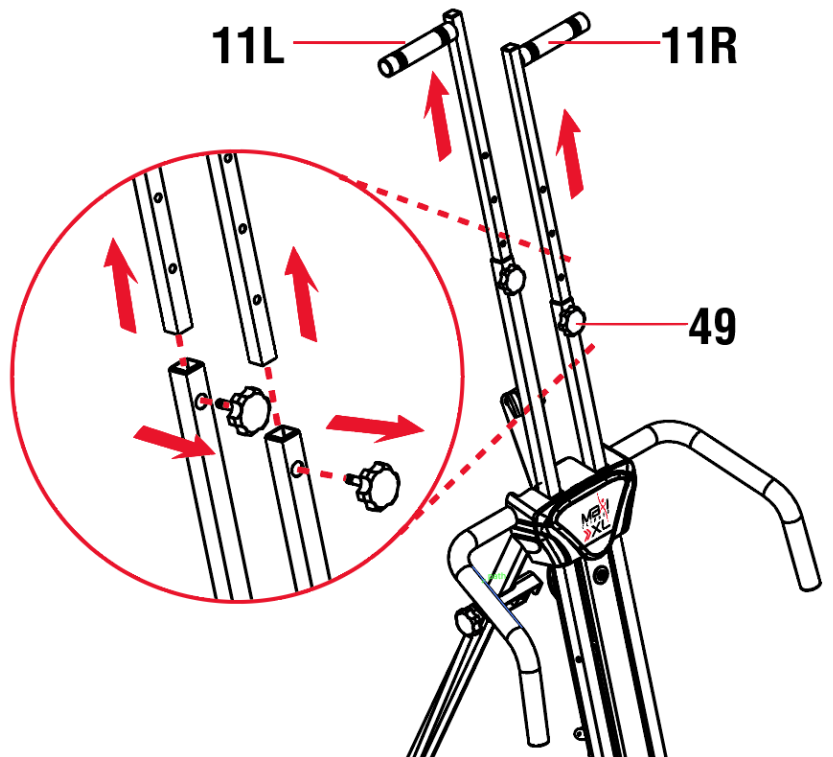


STEP 3

Remove the front cover (57).

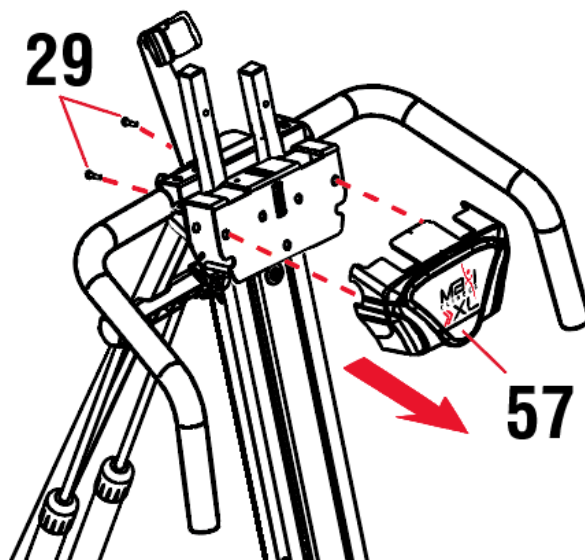


STEP 4

Take off the steel cable (26) from the adjusting tubes (9 and 10).

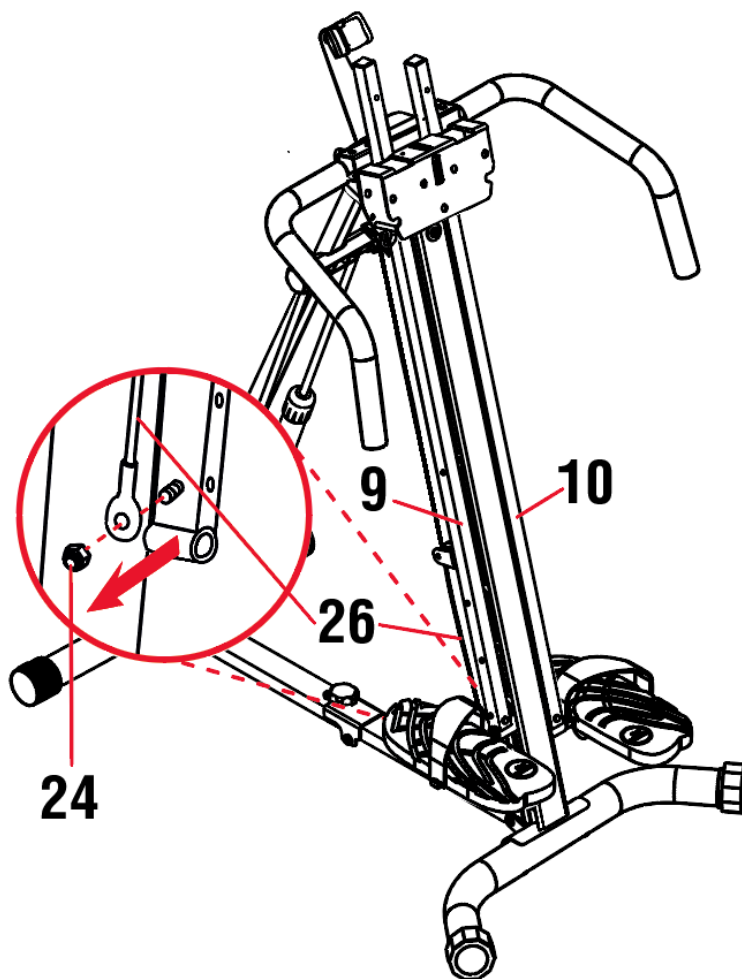


STEP 5

Remove the curved stabilizer (1) by untightening the screws, nuts and washers (17, 18 and 72).

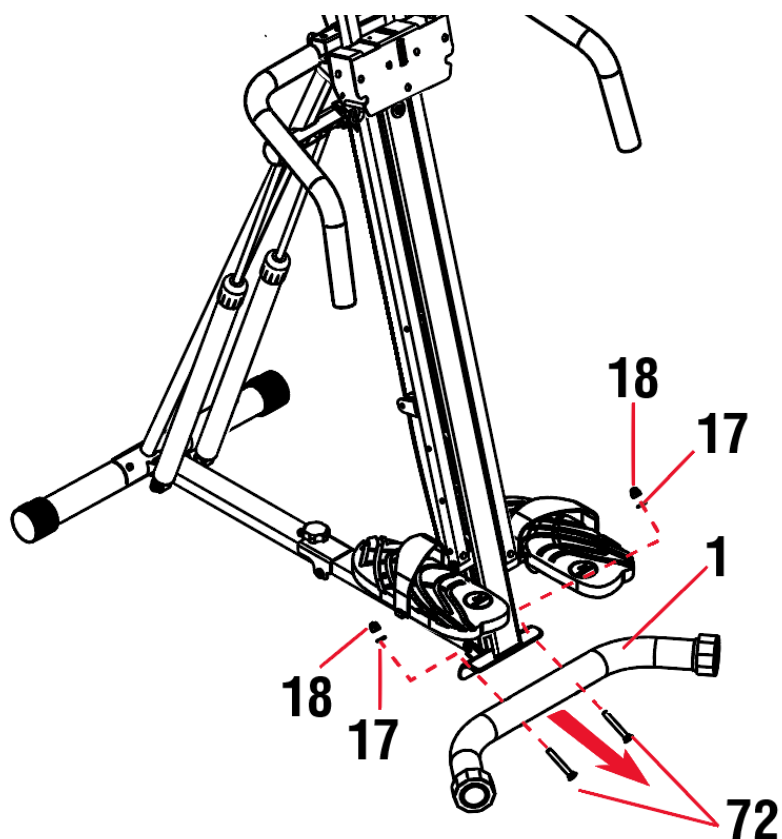

STEP 6


Untighten the screws, nuts, washers and cushions from the bottom of the machine (19, 20 and 21).

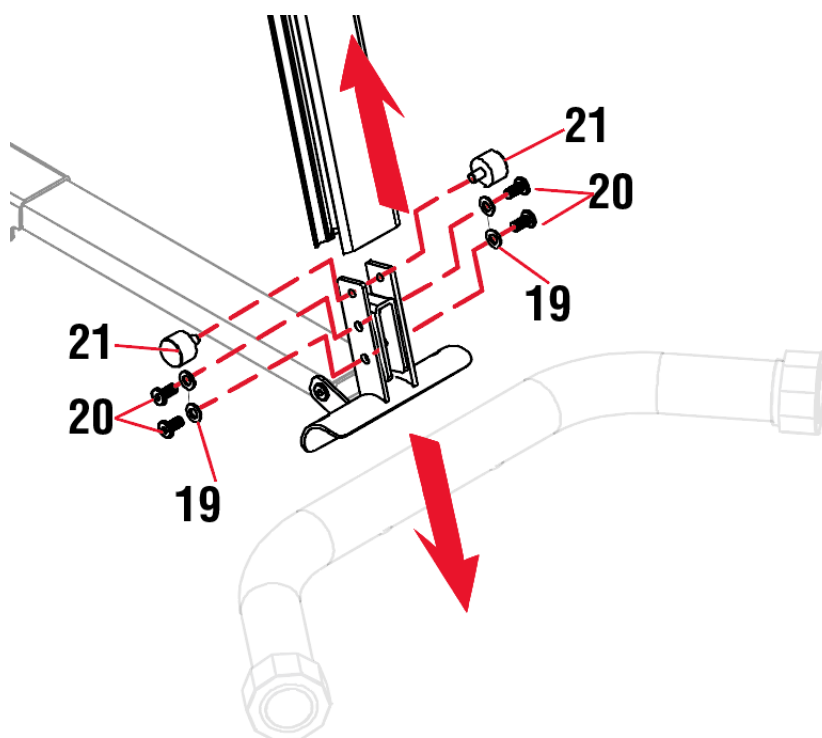

STEP 7


Take off the connecting sheet of rear stabilizer (4) and the U bracket will slide off (3).

*At the reassembly, we suggest to laid on your side the machine to put the U bracket (3) in its place.

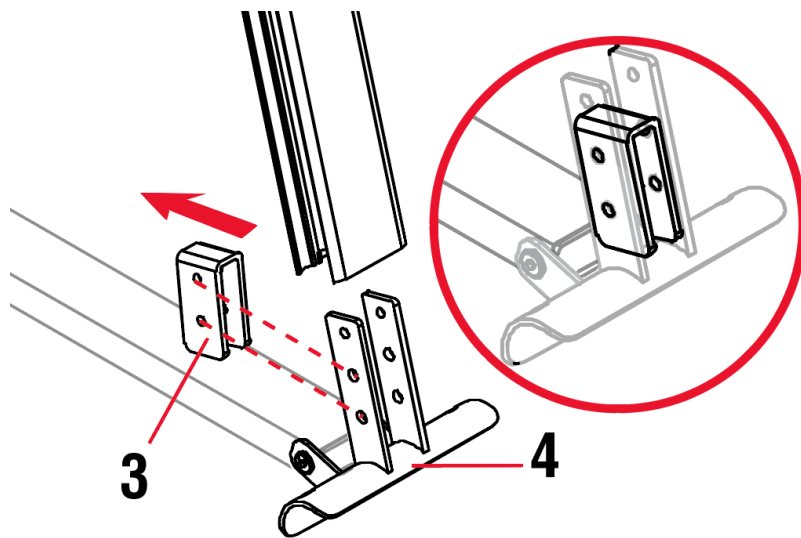


STEP 8

Slide the adjusting tubes (9 and 10) towards the bottom of the machine until they are completely separated from the main frame.

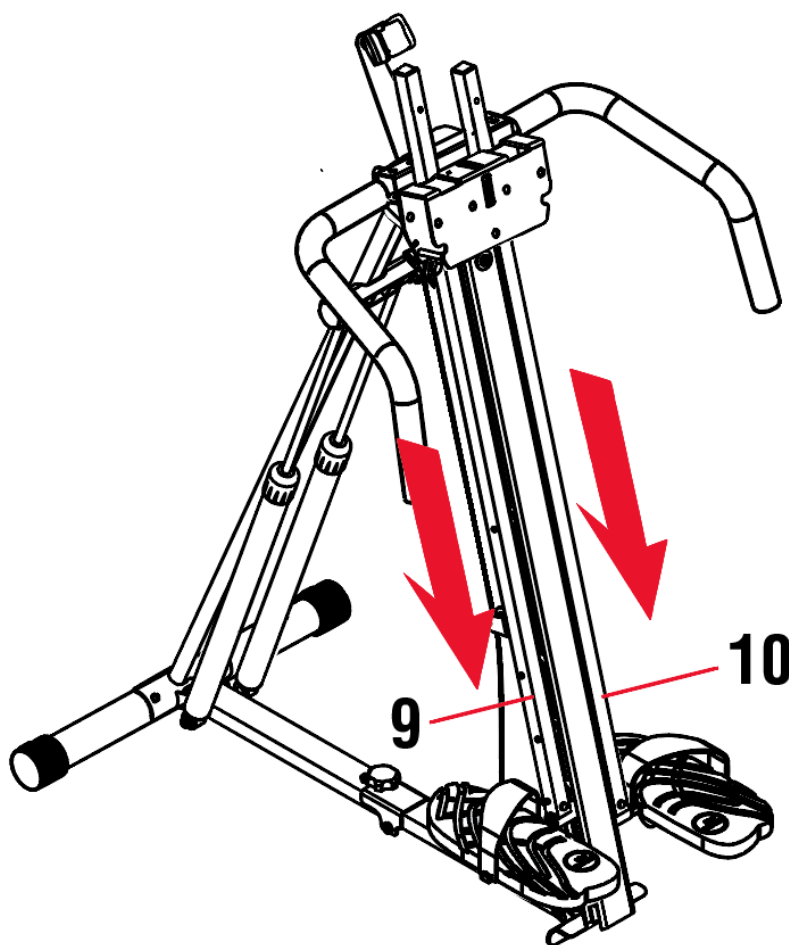

STEP 9

Remove the screws, nuts and washers (19, 24 and 42) that hold the guiding wheels (56). Replace the new guiding wheels (56). Do not overtighten the screw to avoid excessive wear on the guiding wheels.

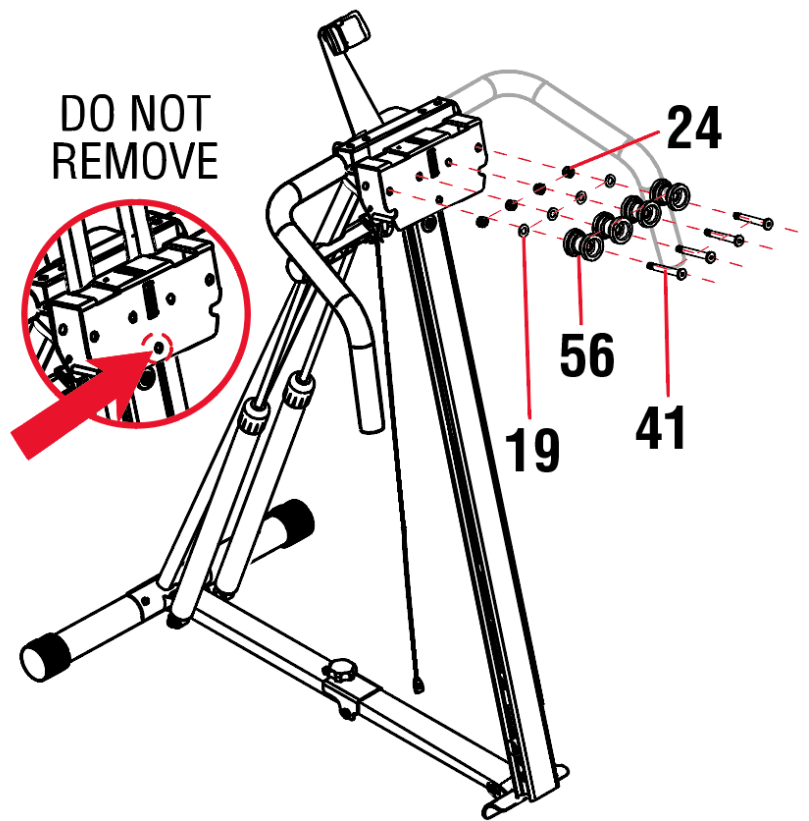

For reassembly repeat steps 1 to 8 in reverse order.