




LMD-23

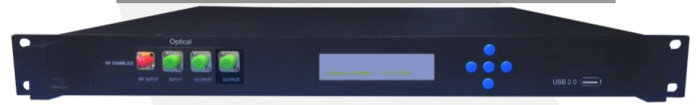

DEVICE

23 Gb/s C+L Band Lightwave Modulator

OVERVIEW

The Optilab LMD-23 is a high performance digital light wave transmitter designed for broad bandwidth applications up to 23 Gb/s. This rackmount unit includes an internal Lithium Niobate (LN) optical intensity modulator, and an ultra-broadband RF driver with matched impedance, as well as a built-in Automatic Bias Control (ABC) board which allows a stable operation over long operating periods of time. The external laser source can be any polarization maintaining device, such as a fiber laser, tunable laser, or fixed wavelength Distributed Feedback (DFB) laser, making it a versatile solution. It is compliant with standards such as OC- 192, STM-64, and 10G Enet, and optical links can be established quickly and efficiently with its intuitive front panel. For a higher output power version, an optional internal booster EDFA is also available for increased transmission range. Contact Optilab for more information.


FEATURES

- 20 GHz Modulator
- Internal Modulator Driver
- Built-in Automatic Bias Control
- 1 year warranty
- Accepts C, L, & C+L band laser input
- Accepts Tunable Laser Input
- Variable Gain Adjustment

USE IN

- Satellite Communication
- RF/IF Signal Distribution
- Wideband RFoF transmission
- C+L band Lightwave Modulation
- NRZ Optical Communications
- OC-192, STM-64, and 10G Enet

FUNCTIONAL DIAGRAM

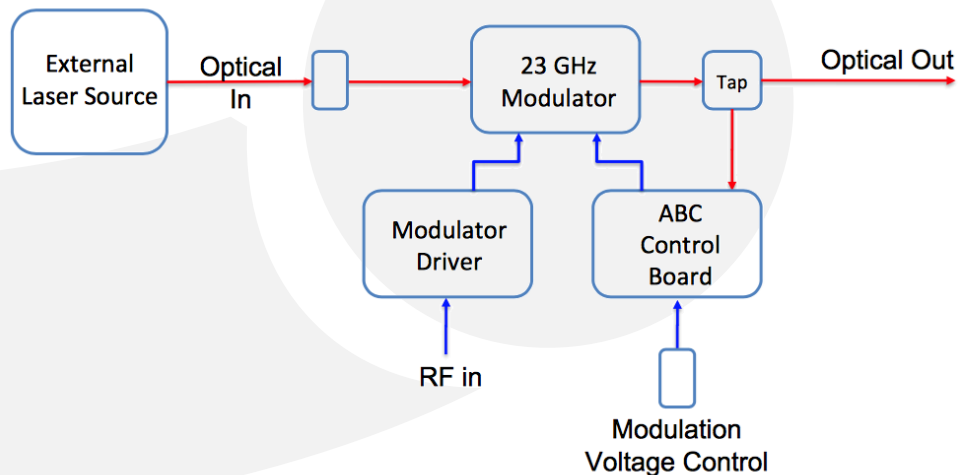



LMD-23

SPECIFICATIONS

Operating Wavelength	1530 nm to 1600 nm (C+L option)
Laser Source	User's External Input
Optical Input Level	+20 dBm max.
Vpp Modulation Adjustment	4.5 – 7.5 V
RF Return Loss	> 15 dB @ 10 GHz, > 12 dB @ 15 GHz
Impedance	50Ω
Digital Bandwidth	50 Mb/s to 23 Gb/s
Input RF Voltage	> 0.5 Vpp
Optical Output Level	> 6 dBm @ +13 dBm optical input

GENERAL

MODULATOR

Modulator Bandwidth	20 GHz typ.
Modulator Bias Mode	Automatic Bias Control
Extinction Ratio	> 15 dB @ 10 Gb/s
Modulator Voltage Range	7.0 Vpp @ 12.5 Gb/s

DRIVER

Modulator Driver Type	High Gain, Single-ended, 20 GHz
Rise/Fall Time	40 ps max.
Optical Return Loss	50 dB min.

MECHANICAL

Operating Temperature	0 °C to +40 °C
Storage Temperature	-10 °C to +70 °C
Power Supply Requirements	80 V -240 V AC, 48 – 70 Hz, 1A
Optical Connectors	FC/APC (Input/Output)
Fiber Type	PANDA Input, SMF-28 Output
RF Input Connector	SMA Connector Female, 50Ω
Control	Modulation Voltage
Alarms	LED: Optional Input Power Detect
Dimensions	1U Rack: 19" x 16" x 1.75"

ORDERING OPTIONS

LTD-x-23-yy

x C: 1530 – 1565 nm, L: 1565 – 1610 nm, C+L: 1530 – 1600 nm
yy None: SM output, PM: PM output

