

# LTC-40



## 40 GHz Lightwave Transmitter Modulator for RFoF

### OVERVIEW

The Optilab LTC-40 is a high performance Lightwave Transmitter Modulator designed for analog photonics applications from DC to 40 GHz. This unit includes a 30 GHz optical intensity modulator and an Automatic Bias Control (ABC) board with four different operating modes. The integrated internal DFB laser makes it a versatile solution for RFoF system integration. Contact Optilab for more information.


### FEATURES


- 1520 nm to 1610 nm wavelength range
- Automatic Bias Control w/ 4 mode operation
- Internal DFB laser up to 50 mW
- Customizable Options:
  - Low Drive Voltage
  - PM output
  - High Extinction Ratio (> 30 dB)
  - Temp. Qualified (-55°C to +75°C)

### USE IN

- Sub-nanosecond pulse generation
- Optical communications to 40 Gb/s
- 32 GHz RFoF transmission
- Analog photonics
- RF/IF signal distribution
- Satellite communication

### FUNCTIONAL DIAGRAM

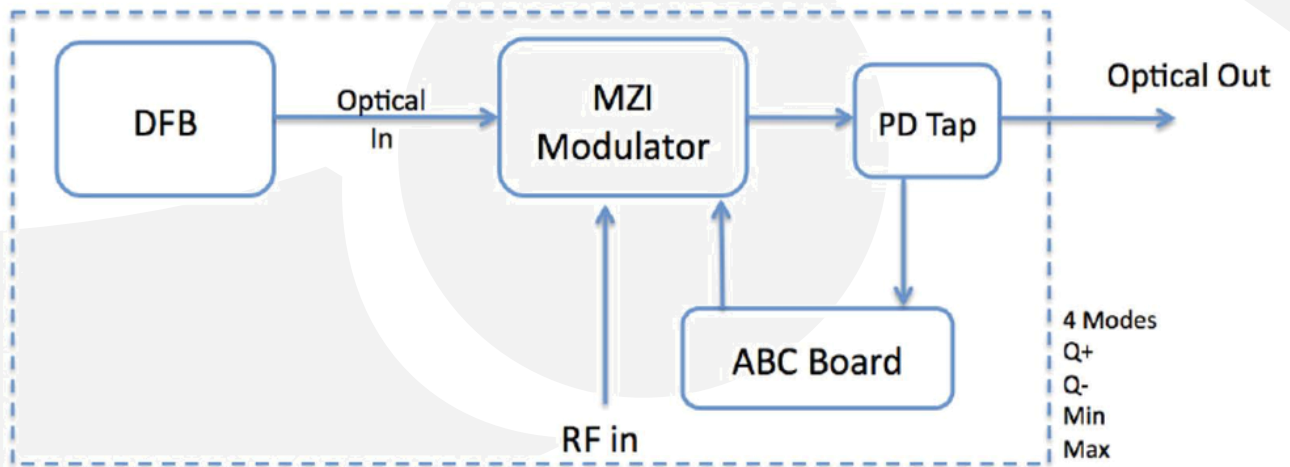

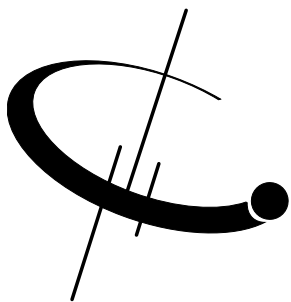

# LTC-40

## SPECIFICATIONS

Operating Wavelength	1520 nm to 1610 nm
Laser Source	Internal DFB laser, 1550 ± 10 nm; other wavelengths and narrow linewidth < 1 MHz are available
Laser Power Level	20, 30, 40, 50 mW
RF Return Loss	> 15 dB @ 20 GHz; > 5 dB @ 40 GHz
Impedance	50Ω
Operating Frequency Range	DC to 40 GHz
Input RF Voltage	27 dBm max.
Optical Output Level	6.5 dBm typ. With 20 mW DFB
S21 Bandwidth	3 dB, 28 GHz typ.
Modulator Bias Mode	4 Automatic bias control modes, selectable by software
Extinction Ratio	25 dB typ.; > 30 dB (HE version)
Modulator Voltage $V_{PI}$	3 V typ. @ 10 GHz typ

## GENERAL

IIP3 @ 7 GHz	32 dBm typ.; 29 dBm typ. (LD version)
1 dB Compression Point @ 10 GHz	16.5 dBm typ.; 14.5 dBm typ. (LD version)


## ANALOG


Operating Temperature (standard)	-30 °C to +60 °C
Operating Temperature (TQ version)	-55 °C to +75 °C
Storage Temperature	-60 °C to +90 °C
Power Supply Requirements	AC Power Cord
Optical Connector	FC/APC
Fiber Type	SMF-28 output; PANDA output (PM version)
RF Input Connector	K connector
Power Connector	4 Pin Molex (AC Option Available)
Remote Control	USB 2.0 software included
Alarm	LED bias mode status
Dimensions	241 mm x 152 mm x 41 mm

## MECHANICAL

## BIAS CONTROL MODE



Mode	Operation Conditions
Q+	Set to quadrature point of positive slope for linear analog modulation
Q-	Set to quadrature point of negative slope for linear analog modulation
Min.	Set to min. point of operation for pulse generation or digital modulation
Max.	Set to max. point of operation for pulse generation or digital modulation






# LTC-40


## TYPICAL S21 AND S11 BANDWIDTH

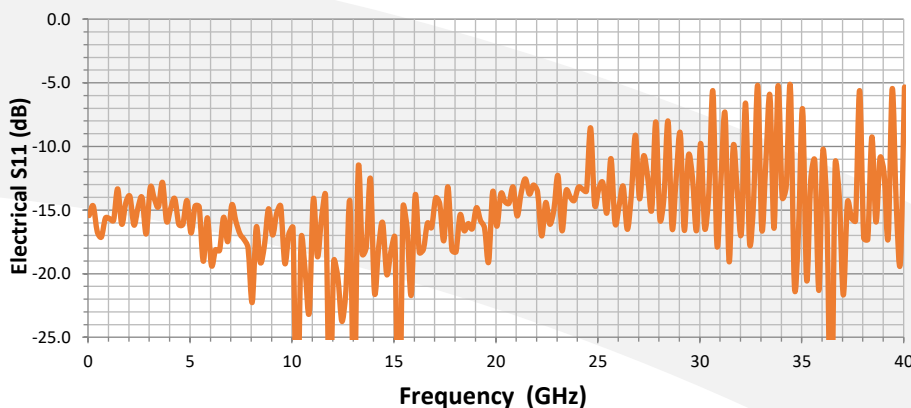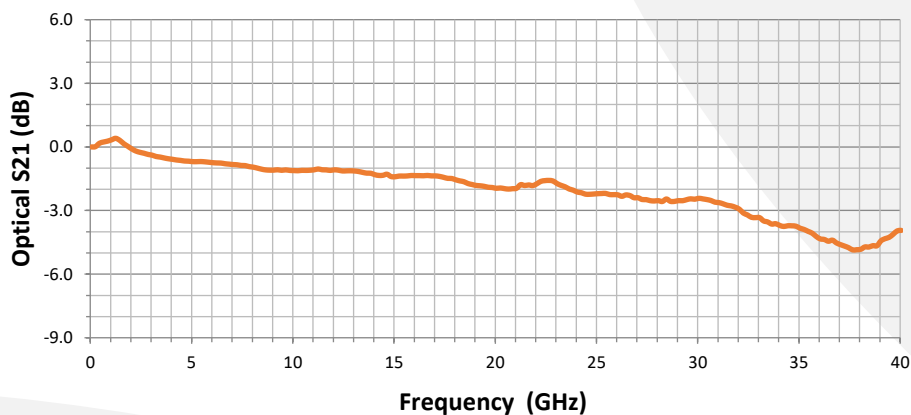

## BIAS SETTING MODES FOR LTC

Based on sophisticated phase measurement of this small dither signal, LTC-40 provides four selectable operating modes: quadrature (Quad +), inverted quadrature (Quad -), minimum (Min), or maximum (Max) points.

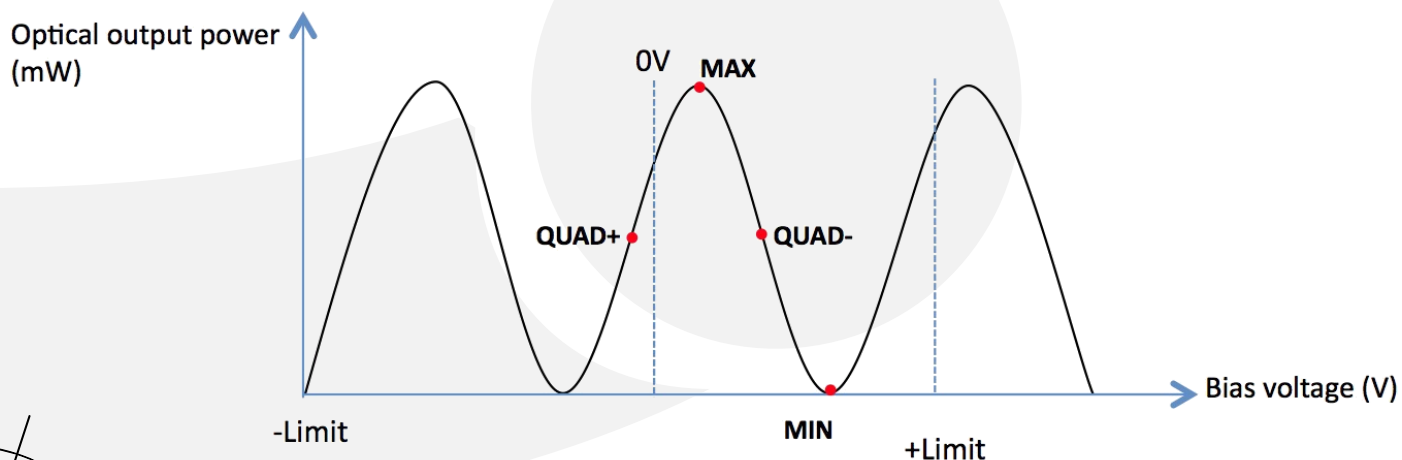

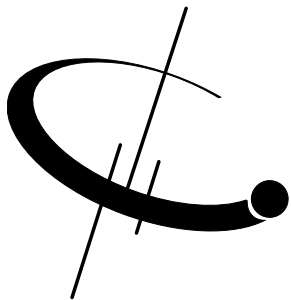

# LTC-40

## ORDERING OPTIONS

### LTC-40-XX-YY

**XX** PM: Polarization Maintaining  
HE: High Extinction Ratio

**YY** DC: DC +/- 5V Power Supply (Option 1)  
AC: AC 100/240 VAC (Option 2)

Option 1 : DC +/- 5V



Option 2 : 100/240 VAC

