



RFLL-20-H



DEVICE

20 GHz RF over Fiber Lightwave Link

OVERVIEW

The Optilab RFLL-20-H RF over Fiber Lightwave Link is composed of a MD-20-M modulator driver, LTC- 20-M lightwave transmitter module and a PD-30-M receiver to form a high-performance RFoF link for up to 20 GHz applications.

FEATURES

- RFoF Link up to 20 GHz Bandwidth
- USB Monitor and Control Interface
- High Dynamic Range
- Low Noise Figure
- High Linearity Receiver

USE IN

- Satcom microwave antenna signal distribution
- Broadband delay-line and signal processing
- Phased and interferometric array antenna
- RF/IF Signal Distribution
- RF to 20 GHz Transmission over Fiber

LINK PERFORMANCE SUMMARY


Analog Bandwidth	20 GHz
Link Gain vs Bandwidth	-4 dB/5 GHz typ., -7 dB/15 GHz typ., -11 dB/20 GHz typ.
Input 1 dB Comp.	-6.0 dBm @ 1 GHz
Gain Flatness	± 0.5 dB over 1 GHz
Noise Figure	14.4 dB @ 10 GHz, 16.6 dB @ 20 GHz
SFDR	-105 dBm x Hz ^{2/3}
Group Delay	± 69.6 ps





RFL-20-H

CONFIGURATION DIAGRAM

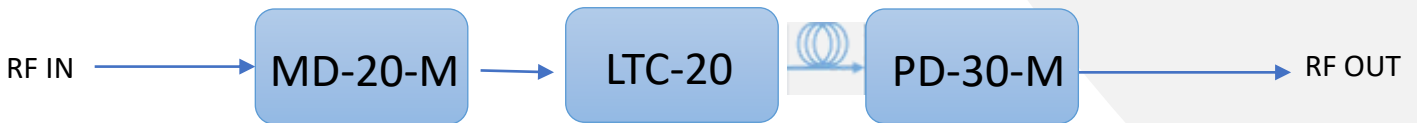

MD-20-M, 20 GHz MODULATOR DRIVER WITH ADJUSTABLE DC BIAS

The Modulator Driver (MD) is a 20 GHz Bandwidth RF Amplifier in a compact and user-friendly module that provides a high-quality, single-ended voltage to drive an optical modulator.


LTC-20-M, 20 GHz LIGHTWAVE TRANSMITTER MODULE FOR RFOF

The high performance Lightwave Transmitter Module designed for analog photonics applications from DC to 20 GHz.

PD-30-M, 30 GHz LINEAR INGaAs PIN PHOTODETECTOR, MODULE

The bandwidth PIN receiver module designed for RF over Fiber, antenna remoting, and broadband RF transmission applications.


LINK GAIN

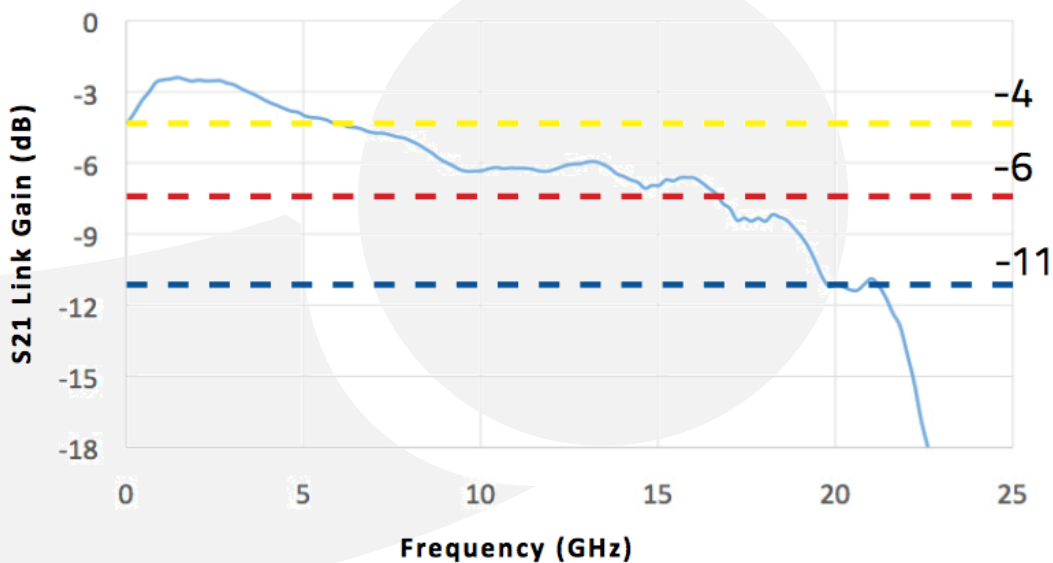




RFL-20-H


S21 BANDWIDTH

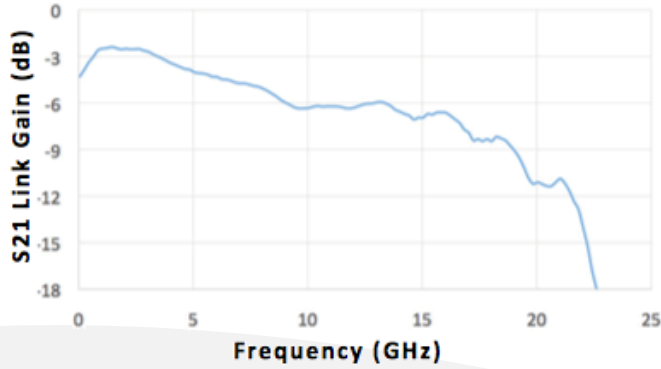


S11 RESPONSE

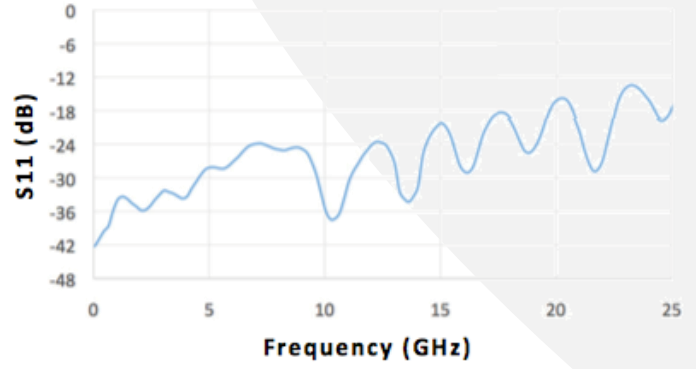


NOISE FIGURE

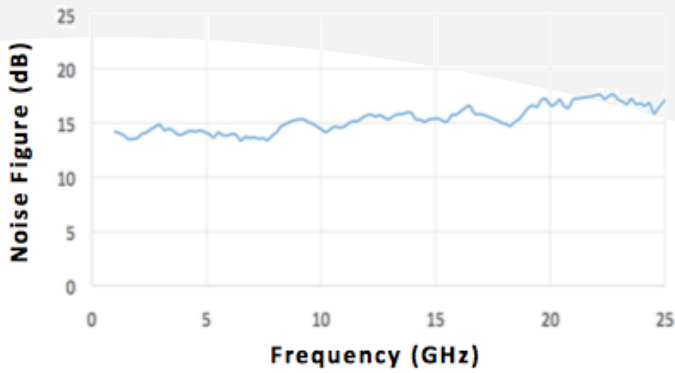


GROUP DELAY

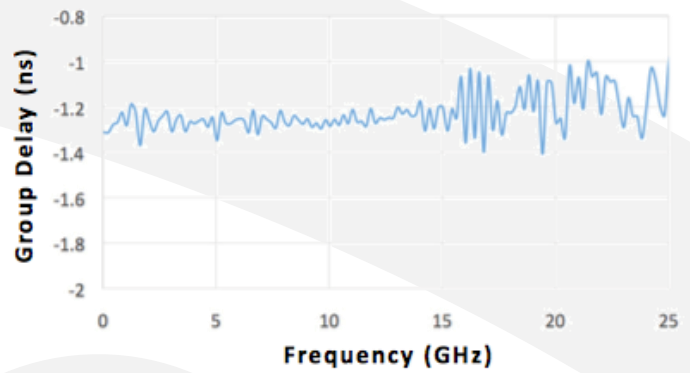

1 DB COMPRESSION

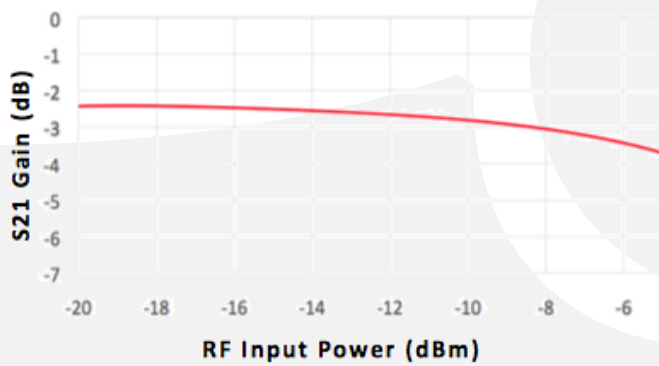

S22 ELECTRICAL

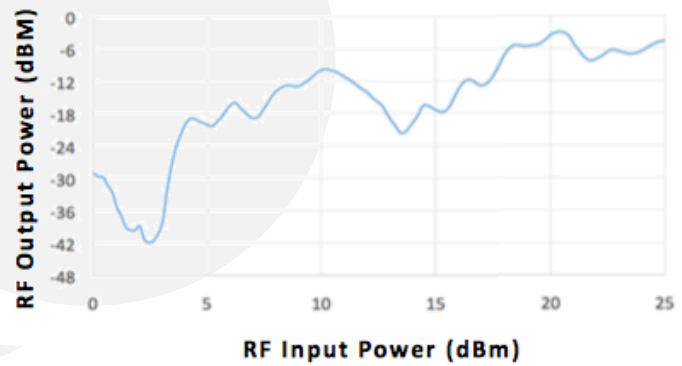



RFL-20-H

GENERAL SPECIFICATIONS

MD-20-M	Power Supply Requirements	+12 V DC, 1 A max.
	Dimensions	160 mm x 65 mm x 32.5 mm
	Accessories Included	Cables
PD-30-M	Power Supply Requirements	± 5 V DC, 500 mA max.
	Dimensions	82 mm x 60 mm x 26.5 mm
	Accessories Included	USB Adaptor and Cables
LTC-20-M	Power Supply Requirements	AC Power Cord
	Dimensions	241 mm x 152 mm x 41 mm
	Accessories Included	Cables
RF	S11 Reflection	From DC to 17 GHz < -18, From 17 GHz to 25 GHz < -12 dB
	S22 Reflection	From DC to 9 GHz < -12 dB, From 9 GHz to 17 GHz < -9 dB, From 17 GHz to 25 GHz < -3 dB

CONTROL SOFTWARE (OPTIONAL)

A LabView™ based control software is used to set the RF over Fiber system parameters and monitors system performance.

