



## INSTALLATION INSTRUCTIONS

**PART No.**

**FB27222**

'46-'75 CJ-5

**Front & Rear Lubeable Shackles**

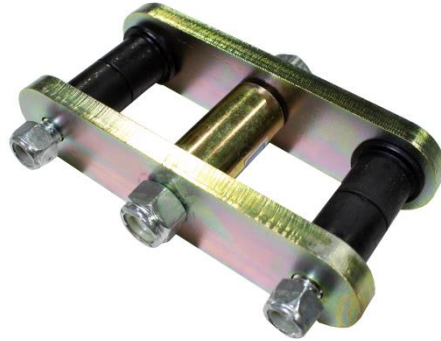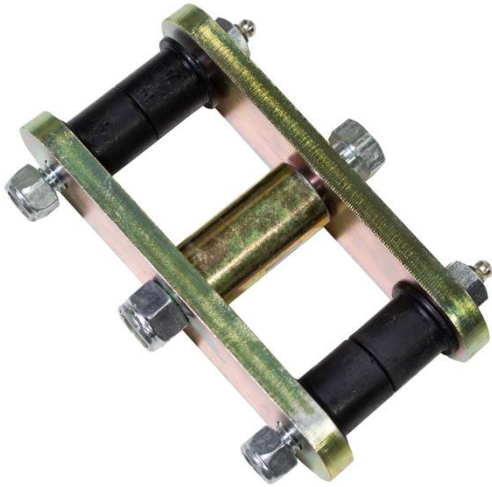

### REQUIRED TOOLS

Ratchet  
(2) 3/4" Socket

### KIT CONTAINS

Steel Plate  
7/16" Zinc Plated Steel Bolt w/ Grease Fitting  
.45" Steel Bushing  
.5" Steel Bushing  
1/2" Hex Nut  
1/2" Zinc Plated Steel Bolt  
Poly Bushing  
7/16" Nylock Nut

### QTY

4  
4  
4  
2  
4  
2  
8  
2



- 1) The Greasable Bolts will need to be tightened to 30ft-lbs
- 2) The Steel center bolt will need to be tightened to 55ft-lbs
- 3) Each bolt will need to be re-tightened after 100 miles of use

