

INSTALLATION INSTRUCTIONS

PART No.

FB27226

'76-'86 CJ-7

VIDEO AVAILABLE

Rear Lubeable Shackles



Ratchet Steel Plate 4
(2) ¾" Socket ½" Zinc Plated Steel Bolt w/ Grease Fitting 5." Steel Bushing 2
½" Hex Nut 6
½" Zinc Plated Steel Bolt 2
Poly Bushing 8






INSTALLATION INSTRUCTIONS

PART No.

FB27226 '76-'86 CJ-7

Rear Lubeable Shackles

- 1) The Greasable Bolts will need to be tightened to 30ft-lbs
- 2) The Steel center bolt will need to be tightened to 55ft-lbs
- 3) Each bolt will need to be re-tightened after 100 miles of use

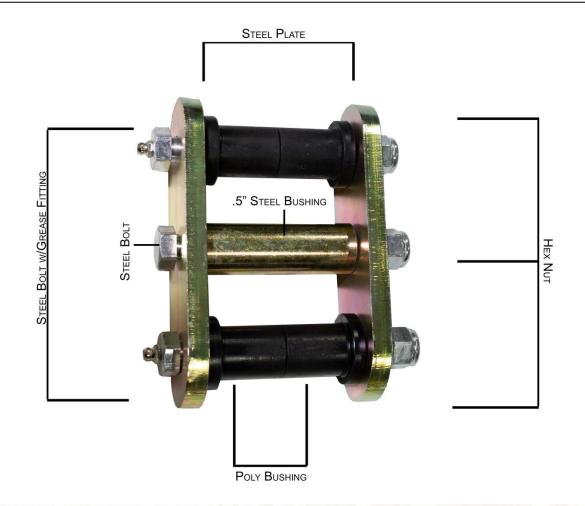



INSTALLATION INSTRUCTIONS

PART No.

FB27226 '76-'86 CJ-7

Rear Lubeable Shackles

