



## INSTALLATION INSTRUCTIONS

**PART No.**

**FB47169**

**07-18 JK Wrangler  
Tailgate Spare Tire Bump Stop**



### REQUIRED TOOLS

Ratchet  
Sockets  
Cutting Utility

### KIT CONTAINS

Tailgate Bump Stop

### QTY

2

## INSTALLATION INSTRUCTIONS

**PART No.**

**FB47169**

**07-18 JK Wrangler**

**Tailgate Spare Tire Bump Stop**

**1) PREPARE**

Remove your vehicle's existing tire from the tire carrier by loosening its lug nuts.



**2) REMOVE**

Firmly grip the existing bump stops and pull them out and away from the tailgate.




**3) INSTALL**

Insert your new Fishbone Offroad bump stops into the tailgate while simultaneously turning it to ensure a snug fit.



**4) TRIM**

Attempt to resecure your spare tire. If the bump stop prevents you from doing, or makes it very difficult, carefully trim away extra material while following the trim lines. Repeat on the opposite side.

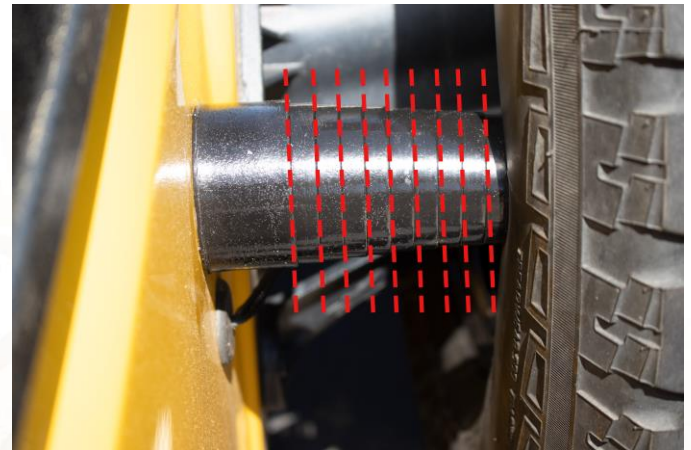

**ENJOY YOUR FISHBONE OFFROAD TAILGATE BUMP STOPS**