



UL LLC
1075 W Lambert Rd Suite B
Brea, CA 92821

Outdoor Distribution Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-10-2014

Prepared For

SPJ LIGHTING Inc.
ARCHITECTURAL LANDSCAPE & OUTDOOR LIGHTING

Catalog Number
A36-SM (2700K)

Order Number

13547756

Test Number

13547756.05A

Revised:

2021-03-31

Test Date

2020-12-08

Prepared By

Austin Duff, Technician

Approved By

Eric Gaudreau, Engineering Leader

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Luminaire Description: White decorative housing and clear glass lens
Lamp: 14 LEDs
Mounting: Bollard
Ballast/Driver: FORZLUX PS14-350C-DUALDIM-UNV-P

Luminaire



Luminaire Characteristics

Luminous Length: 5.00 in.
Luminous Width: 5.000 in.
Luminous Height: 7.00 in.

Summary of Results

Roadway Classification: Type VS, Very Short
Cutoff Classification: Semicutoff
BUG Rating: B0 U3 G1

Test Conditions

Test Temperature: 24.8 °C
Voltage: 120.1 VAC
Current: 0.1036 A
Power: 12.14 W
Power Factor: 0.976
Frequency: 60 Hz
Current THD: 14.5 %

Tested in 30 planes left side, 30 planes right side, left and right averaged
Vertical test increments are 2.5 degrees
Test distance exceeds five times the greatest luminous opening of luminaire

Laboratory results may not be representative of field performance
Ballast factors have not been applied



Distribution - Goniophotometer


Distribution Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
24.8 °C	120.1 VAC	0.1036 A	12.14 W	0.976	60 Hz	14.5 %

Summary of Results


IES Roadway Classification: Type VS, Very Short	Total Lumen Output: 790 Lumens
Cutoff Classification: Semicutoff	Luminaire Efficacy: 65.0 lm/w
BUG Rating: B0 U3 G1	Maximum Candela: 330 Candela

ISO FootCandle Plot at 3 Feet

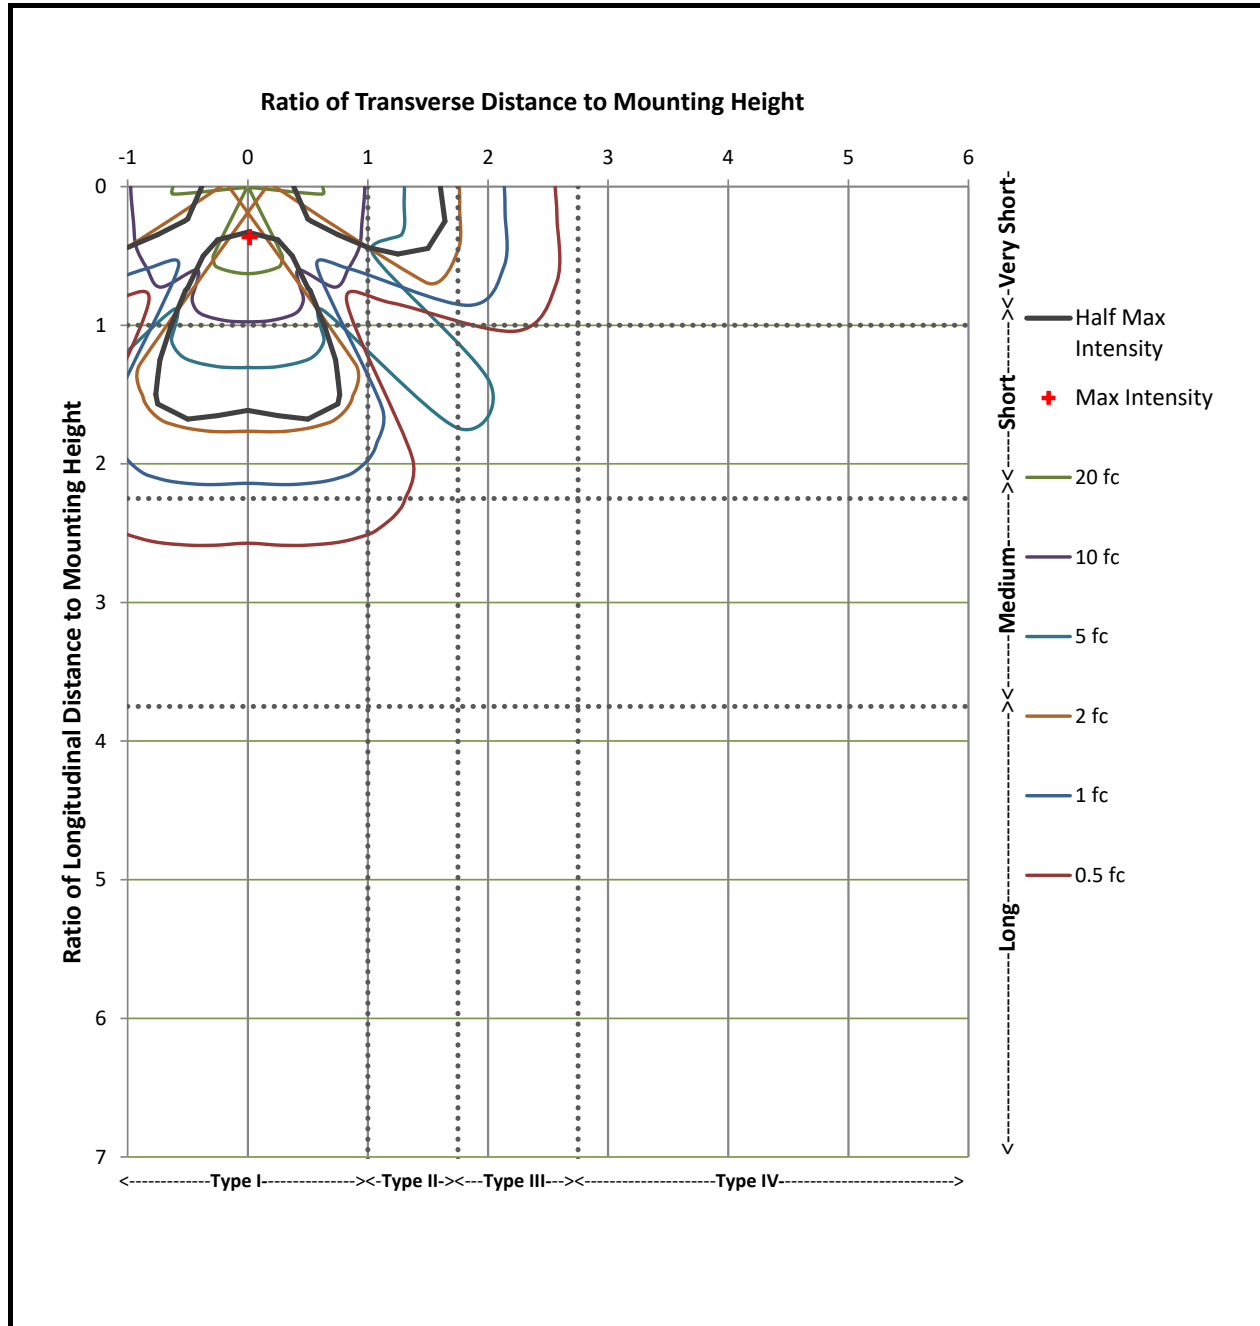



Maximum Plane and Cone Plots of Candela

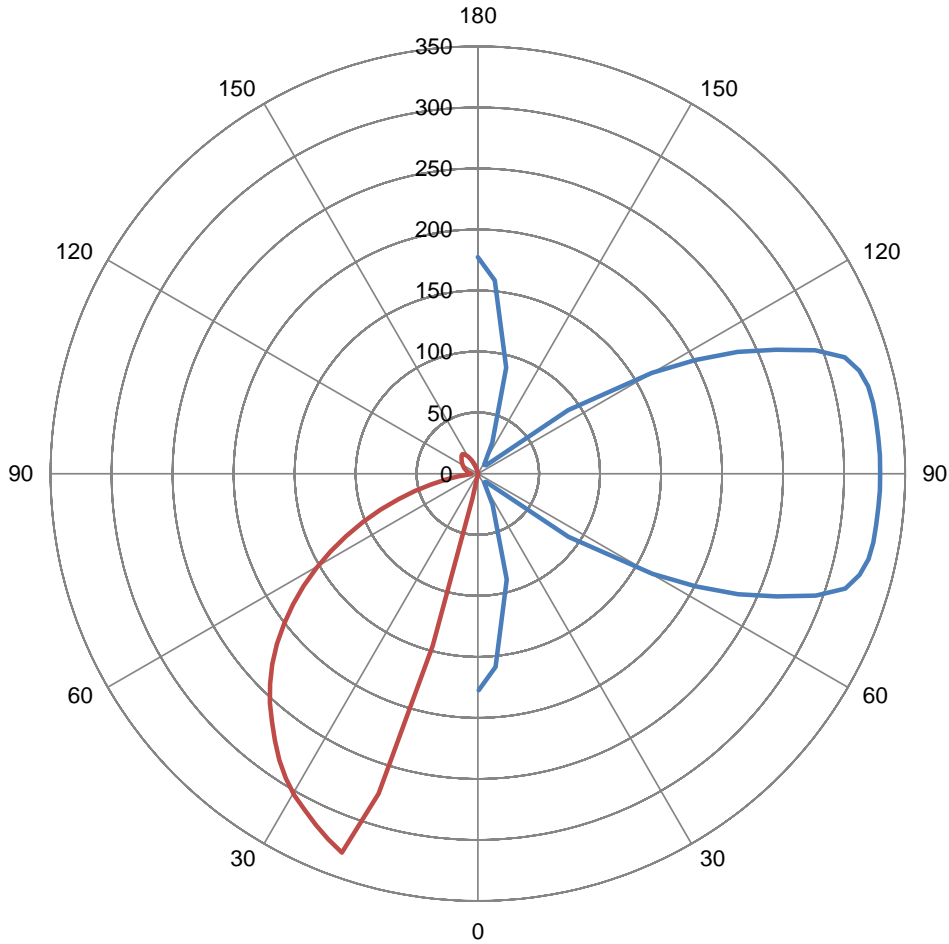

Vertical Plane Through

87.5 ° Lateral

Lateral Cone Through

20 ° Vertical

Maximum Intensity (Candlepower):


330 Candela

Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	0.0	0.0%	60-65	52.3	6.6%	120-125	9.2	1.2%
5-10	0.3	0.0%	65-70	42.3	5.4%	125-130	8.8	1.1%
10-15	1.9	0.2%	70-75	31.8	4.0%	130-135	8.3	1.0%
15-20	15.1	1.9%	75-80	22.0	2.8%	135-140	7.7	1.0%
20-25	38.7	4.9%	80-85	14.4	1.8%	140-145	6.6	0.8%
25-30	54.4	6.9%	85-90	10.3	1.3%	145-150	5.2	0.7%
30-35	61.9	7.8%	90-95	10.1	1.3%	150-155	3.8	0.5%
35-40	66.1	8.4%	95-100	10.6	1.3%	155-160	2.4	0.3%
40-45	68.6	8.7%	100-105	10.6	1.3%	160-165	1.3	0.2%
45-50	68.7	8.7%	105-110	10.4	1.3%	165-170	0.5	0.1%
50-55	65.7	8.3%	110-115	10.0	1.3%	170-175	0.1	0.0%
55-60	60.1	7.6%	115-120	9.6	1.2%	175-180	0.0	0.0%



IES "BUG" Rating
 (Back Light, Uplight, Glare)
 Per IES TM-15-11

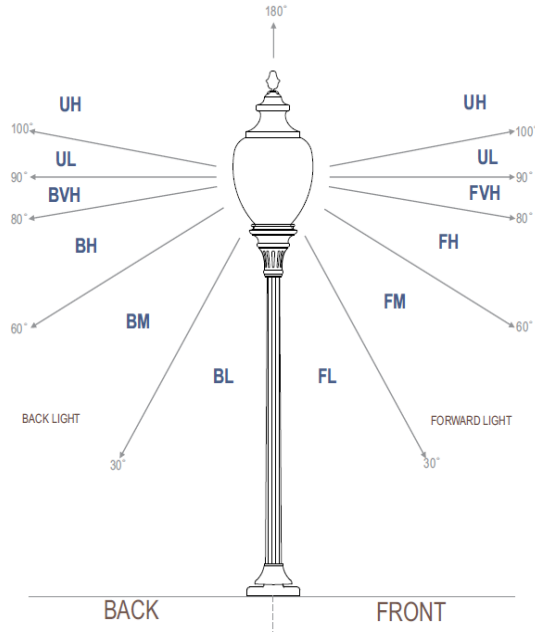

Luminaire Classification System (LCS)

LCS	Zone	Lumens	Luminaire %
FL	(0-30)	55.2	7.0%
FM	(30-60)	195.5	24.8%
FH	(60-80)	74.2	9.4%
FVH	(80-90)	12.3	1.6%
BL	(0-30)	55.2	7.0%
BM	(30-60)	195.5	24.8%
BH	(60-80)	74.2	9.4%
BVH	(80-90)	12.3	1.6%
UL	(90-100)	20.7	2.6%
UH	(100-180)	94.6	12.0%
Total		789.7	100.0%
BUG Rating	B0 U3 G1		

