PRODUCT: SPJ-PCL-A36-SM WEIGHT: 88 lbs. CONCRETE COLOR: CONCRETE TEXTURE: ○ COAST ○ ETCHED ○ CONCRETE OPOLISHED **Wet Listed** QUANTITY: ___ O CARBON O BARK SEALER: STD. SEALER 4200 GENERAL PRODUCT NOTES: E = EXPOSED FINISHED SURFACE — 7 3/16**"** – **→** 4 1/2" INSTALLATION IS REQUIRED BY OTHERS. ALL EDGES TO BE EASED. 1 5/16" -MANUFACTURING TOLERANCE ±1/4". 2700K STANDARD ELECTRICAL TEMPERATURE: 120-277V (4) 1/2"DIA. (FS-2) S.S. INSERTS 2 1/8" 5 5/16" 1/16" _7/8"DIA. THRU HOLE **BOTTOM VIEW** PLAN VIEW LED BOARD POLYURETHANE CONDUIT 36" FIBERGLASS REBAR PIPE REDUCER -WEATHER BOX (CONTAINS LED -DRIVER)

PERSPECTIVE VIEW

SECTION VIEW


ELEVATION VIEW

	SPJ LIGHTING Inc. ARCHITECTURAL LANDSCAPE & OUTDOOR LIGHTING	PLAN TYPE	CONSTRUCTION PLAN	11/3/20)16_ST-BOL-A36-SI	M 1
		PRODUCT	SPJ-PCL-A36-SM LIGHTED BOLLARD SURFACE MOUNT	SCALE 1 1/4" = 1'	DRAWN BY: W.R.	OF
ı		PROJECT NAME		PC. NO.	QC ITEM NO.	2




Wet Listed



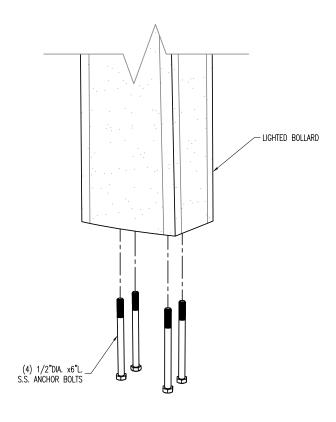

PERSPECTIVE VIEW N.T.S.

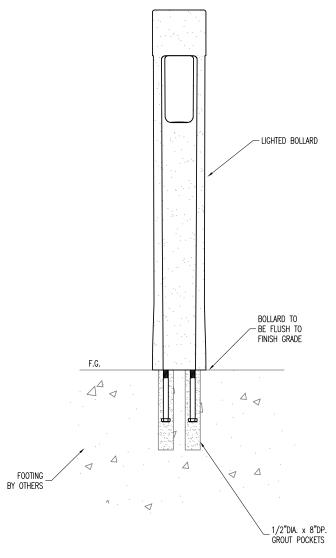

INSTALLATION VIEW N.T.S.

SPJ LIGHTING Inc.
ARCHITECTURAL LANDSCAPE & OUTDOOR LIGHTING

			DATE	FILE NO.	SHEET
	PLAN TYPE	INSTALLATION VIEW	11/3/20016a_ST-BOL-A36-SI		IIN 2
	PRODUCT		SCALE	DRAWN BY:	_
à		SPJ-PCL-A36-SM LIGHTED BOLLARD BELOW GRADE	1 1/4" = 1'	W.R.	OF
	PROJECT NAME		PC. NO.	QC ITEM NO.	2