





Residential Downlight Light Engine (Module and Driver)

Features & Benefits

- Replaces up to 100W incandescent or 2x26W CFLs
- 1.62" square module is ideal size for recessed downlights
- Constant current design produces 96 LPW system efficacy
- Dimmable down to 5% with triac or ELV dimmers
- Patented intelligent thermal design uses metal core board (MCPCB)
- Easily configured into existing and new luminaires
- Available in a variety of color temperatures

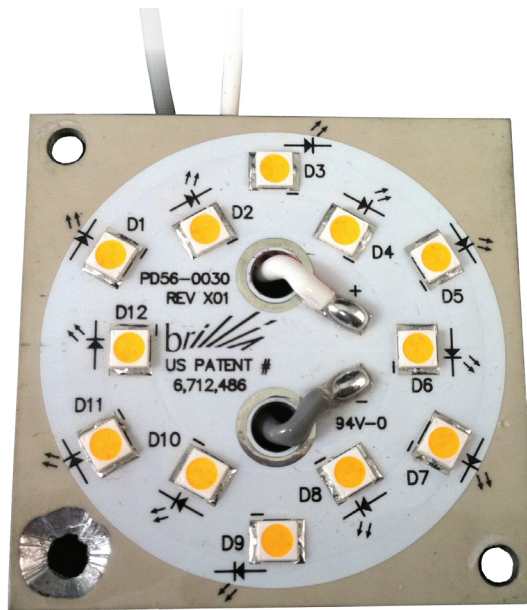

Physical Dimensions

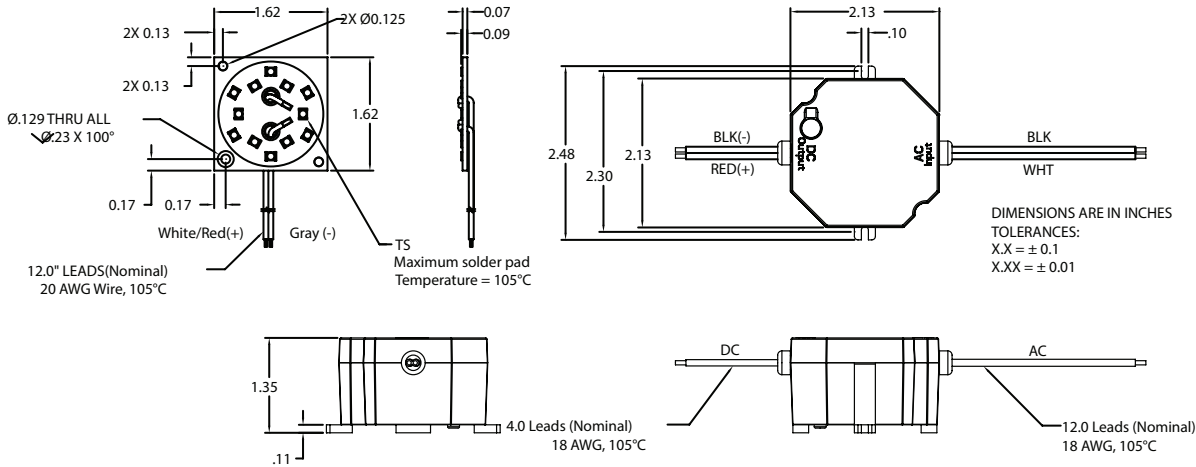

Part Number	Correlated Color Temperature (Kelvin)	Light Output (Lumens) ⁽¹⁾	Power Consumption (Watts)	System Efficacy (LPW) CRI ⁽¹⁾	Beam Angle ⁽¹⁾ (Degrees)	Triac/ELV
FB-MP1000 - 27	2700	930	12	78 85	120	Yes
FB-MP1000 - 30	3000	1020	12	85 85	120	Yes
FB-MP1000 - 35	3500	1060	12	88 85	120	Yes
FB-MP1000 - 40	4000	1100	12	92 85	120	Yes

FB-MP1000

LED Light Engine

