



Model: **SPJ-60L12**

### SPECIFICATION FEATURES

#### Transformer

Input leads are 20 AWG. Output leads are 14 AWG. Lead insulation is 105 °C. The transformer uses a class B 130 °C insulation system.

#### Enclosure

Enclosure temperature will not exceed 70 °C @ 40 °C ambient. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by a screw. The enclosure is black powder coated.


#### General

- Manual reset thermal circuit breaker on the secondary side.
- Controlled with a low-voltage dimmer.
- ETL listed
- CSA listed
- UL standard 5085-1
- NEMA 3R enclosure


### Class 2 Dimmable LED AC Magnetic Transformer

### DESCRIPTION

<b>Model#:</b>	SPJ-60L12
<b>Shown:</b>	Black
<b>Maximum Load:</b>	60 W
<b>Input Voltage:</b>	120 V 60 Hz
<b>Output Voltage Full Load:</b>	11.5 V
<b>Input Current Full Load:</b>	540 mA
<b>Open Circuit Volts:</b>	12.5 V
<b>Output Current Full Load:</b>	4.8 A
<b>Efficiency:</b>	89.20%
<b>Coil Former:</b>	Double Section Bobbin
<b>Thermal Class:</b>	B 130 °C
<b>Leads Primary:</b>	PVC 600 V #20
<b>Leads Secondary:</b>	PVC 300 V #14



Model: IP68 Fitters  
(recommended)

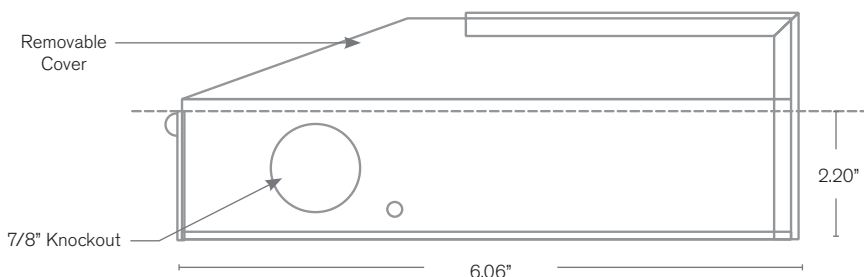

Wet Listed

### ORDERING INFORMATION

Model#	Electrical Input	Electrical Output	Wattage	Circuit
SPJ-60L12	120V	12V	60W	NA
			60W	