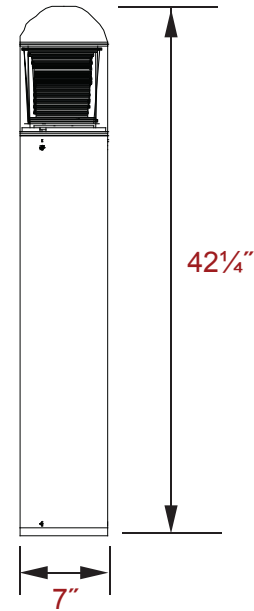## EasyLED Dome Bollard with IES Type V Glass

SPJ-DBT5-1-BOL

42¼"

7"

Housing:
Extruded Aluminum Housing with Flush Mounting Base and Vandal-Resistant Screws, Domed Top, Powdercoat Finish Over a Chromate Conversion Coating, Internal Ballast Tray for Easy Maintenance

Refractor:
IES Type III Clear Prismatic Borosilicate Glass Refractor.

Lens:
Clear Polycarbonate Lens.

Mounting:
Mounting Kit with 8" Anchor Bolts (Included).

Photometric Performance:
Array Lumens: 2,089

Delivered Lumens:
1,022

Wattage:
Array: 14.5w, System: 17w

Driver:
Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Ratings:
CSA:Listed for Wet Locations.

Options:
Surge Protection. Battery Backup. Bollards Can Be Cut To Custom Lengths. Custom Colors Available Upon Request.

Photometrics

House Side
Street Side

Distance In Units Of Mounting Height
Values Based On 3 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point