



EasyLED Small Flood



Housing:
Die Cast Aluminum Housing and Hinged Lens Frame,
Textured Architectural Bronze Powdercoat Finish Over a
Chromate Conversion Coating.

Lens:
Tempered Glass Lens.

Mounting:
Adjustable Knuckle with 1/2" NPS Threads

Delivered Lumens:
1,943 (F, Clear, 4K); 2,123 (F, Clear, 5K);
1,982 (I, Clear, 4K); 2,166 (I, Clear, 5K)


Wattage:
Array: 21.7w, System: 25w

Driver:
Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Ratings:
CSA:Listed for Wet Locations.

Options:
Custom Colors Available Upon Request.

SPJ-ESF-1-FL

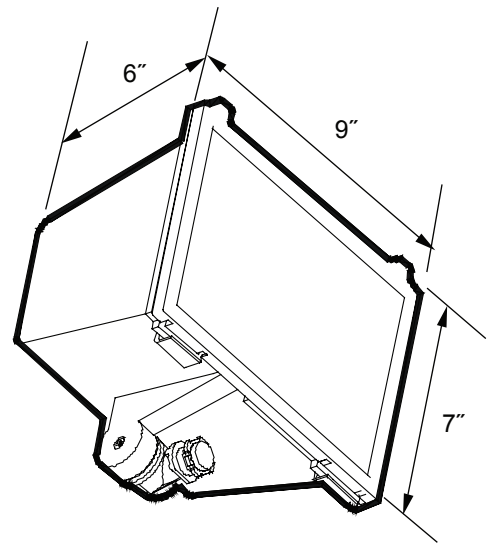

Photometrics

