



EasyLED Large Shallow Wall Pack



Housing:

Die Cast Aluminum Housing and Hinged Front Frame, 1/2" Coin Plugs with O-rings for Conduit and Photocell, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating.

Lens:

Molded Prismatic Borosilicate Glass Lens.

Mounting:

Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit.

Delivered Lumens: 7,607 (4K); 7,924 (5K)

Wattage:

Array: 57.8w, System: 67.3w

Drive

Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz; Dimmable Driver


Ratings

CSA:Listed for Wet Locations. LM-79 Report Available on Select Models.

Options:

Custom Colors Available Upon Request.

SPJ-LSWP-1-WP

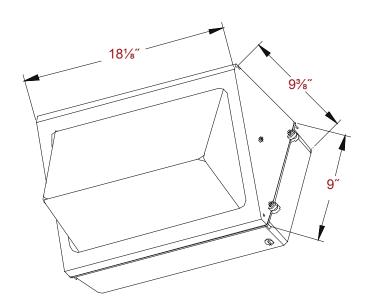

Photometrics

