



EasyLED Series

EasyLED Polycarbonate Entry Light-Round



Housing:
Stamped Galvanized Back Plate with White Powdercoat Finish. Molded Polycarbonate Front Housing in Bronze with Clear Prismatic Lens Area. 120V Photocell Included.

Lens:
Standard clear polycarbonate prismatic lens.

Mounting:
Mount Directly Over a 4" Recessed Outlet Box. Threaded Stem and Nut Included.

Photometric Performance:
Array Lumens: 1,003


Delivered Lumens:
679

Wattage:
Array: 7.3w, System: 9.2w

Driver:
Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Ratings:
CSA: Listed for Wet Locations.

SPJ-PSEL-2-WP

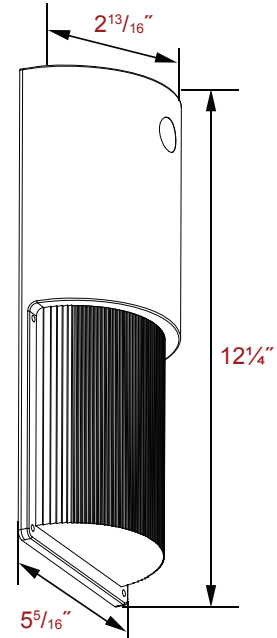

Photometrics

