



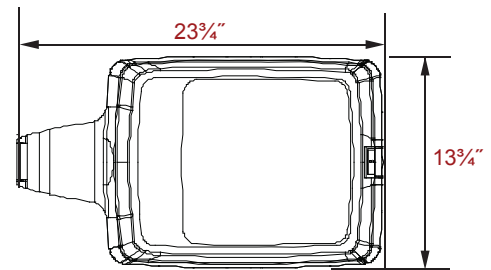

EasyLED Small Kitty Hawk

SPJ-SKH-1-AL

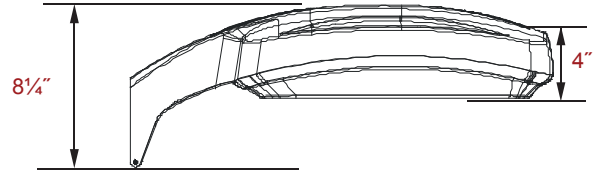

Housing:
Die Cast Housing and Front Frame, Textured Bronze Powdercoat Finish Over a Chromate Conversion Coating. Front Frame is Hinged with an Easy-Open Latch for "No Tools Needed". Integral Ballast Box. Photocell Adaptable.

Lens:
Clear Flat Glass Lens or Clear Flat Prismatic Glass Lens.

Mounting:
Mounts Directly to Flat Poles. Optional Round Pole or Wall Mount Adapters Available.

Photometric Performance:
Array Lumens: 4289 (C Optic); 4405 (F Optic)

Delivered Lumens:
3082 (C, Clear); 3257 (F, Clear)

Wattage:
Array: 37.2w, System: 42w

Driver:
Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz;
Dimmable Driver

Ratings:
CSA: Listed for Wet Locations.

Options:
Surge Protection. Custom Colors Available Upon Request.

Unlimited LED Lumen Packages & Color Temperature Available!

Photometrics

