



SPJ-SKH-1-WP

Bentley EasyLED Small Kitty Hawk Area Light

IP67



(Shown with Kitty Hawk Arm.)

Housing:

Die cast aluminum housing and front frame, integral heat sinking and driver compartment. Powdercoat finish over a chromate conversion coating. Photocell adaptable.

Lens:

Clear flat glass lens or clear flat prismatic glass lens.

Mounting

Mounts with two-piece bracket, yoke, adjustable slipfitter, Kitty Hawk arm, 60mm diameter mounting arm adapter or Easy Hang wall bracket.

Delivered Lumens:

81w: 9,308 (A, Clear); 8,338 (C, Clear); 9,220 (F, Clear); 7,893 (F, Prismatic)

112w: 12,534 (A, Clear); 11,229 (C, Clear); 12,784 (F, Clear)

Wattage:

81 Watt: Array: 80.5w, System: 86.6w 112 Watt: Array: 111.5w, System: 119.9w

Driver:

Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Ratings:

CSA: Listed for Wet Locations. IP67


Options:

Surge Protection. Custom Colors Available Upon Request.


Length with mount (L):


Bracket (BR): 476mm Yoke (Y): 457mm Slipfitter (SF): 476mm

Mounting Arm Adaptor: 485mm

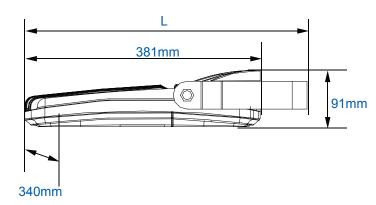

Photometrics





KH25QC1X112U5KC

KH25QF1X112U5KC