




SPJ-SWP-1-WP

EasyLED Small Wall Pack

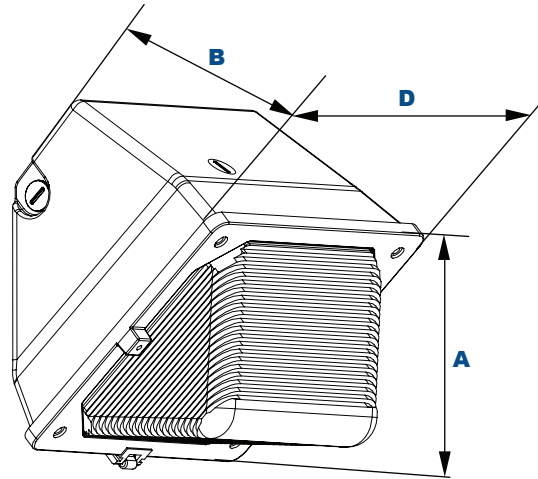

Housing:
Die Cast Aluminum Housing, 1/2" Coin Plugs with O-rings for Conduit and Photocell on Two Sides and Back, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating.

Lens:
Molded Prismatic Borosilicate Glass Lens with Gasket.

Mounting:
Mount Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit or Quick-Mount Bracket.

Photometric Performance:
Array Lumens: 3,151

Delivered Lumens:
2,578

Wattage:
Array: 22.7w, System: 27.6w

Driver:
Electronic Driver, 120-277V, 50/60Hz; Dimmable Driver

Ratings:
CSA: Listed for Wet Locations. LM-79 Report Available on Select Models.

Options:
Surge Protection. Custom Colors Available Upon Request.

Photometrics

