PRODUCT: SPJ-PCL-UL-B WEIGHT: 20 lbs.

CONCRETE COLOR: CONCRETE TEXTURE:

QUANTITY: ___ COART

CONCRETE
CARBON
CLAY

O BARK

C ETCHED

O POLISHED

LIGHT ENGINE:

2W 125 LUMENS

6W 300 LUMENS 8W 580 LUMENS


16W 1,000 LUMENS

SEALER: STD. SEALER 4200


GENERAL PRODUCT NOTES:

E = EXPOSED FINISHED SURFACE INSTALLATION IS REQUIRED BY OTHERS. ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE ±1/4". 2700K STANDARD ELECTRICAL TEMPERATURE: 8-15V







PERSPECTIVE VIEW



PLAN VIEW



SECTION VIEW




ELEVATION VIEW




Wet Listed



SPJ LIGHTING Inc. architectural landscape & outdoor lighting	PLAN TYPE	CONSTRUCTION PLAN	DATE	FILE NO.	SHEET
			11/3/20	010_ST-UL-B	1
	PRODUCT	SPJ-PCL-UL-B UPLIGHT	SCALE	DRAWN BY:	'
			2" = 1'	W.R.	OF
	PROJECT NAME		PC. NO.	QC ITEM NO.	2

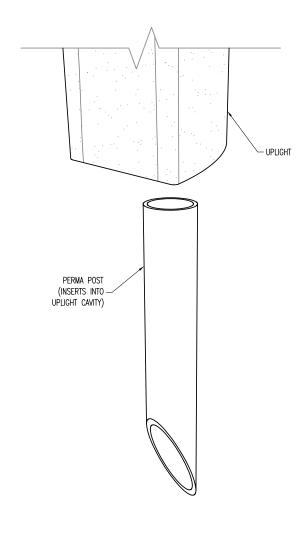



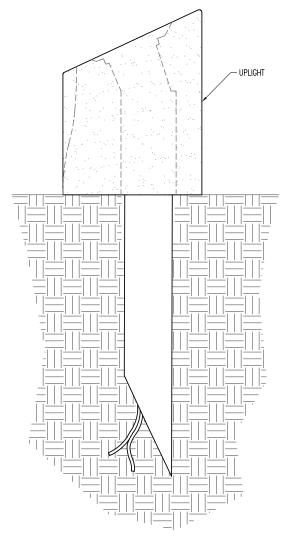

INSTALLATION SIDE VIEW N.T.S.



Wet Listed



SPJ LIGHTING Inc. architectural landscape & outdoor lighting	PLAN TYPE	INSTALLATION PLAN	DATE	FILE NO.	SHEET
			11/3/20	010a_ST-UL-B-IG	2
	PRODUCT	SPJ-PCL-UL-B UPLIGHT IN GROUND	SCALE	DRAWN BY:	
			3" = 1'	W.R.	OF
	PROJECT NAME		PC. NO.	QC ITEM NO.	2