



PROVAC

SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

Stokes 148H Technical Specifications

ULTIMATE VACUUM	10 MICRONS HG. OR LESS
DISPLACEMENT - CU. FT.	50 CFM
PUMP SPEED	610 RPM
MOTOR	2 HP
MOTOR SPEED	1800 RPM SYNC.
STD. ELECTRICAL SPECS.	3/60/230/460
PIPE CONNECTIONS	
SUCTION	1-1/2" STD FLG.
DISCHARGE	1-1/2" NPT
OIL CAPACITY	1-1/4 GAL. (5 LITERS)
NET WEIGHT	345 LBS. (157 KG.)
SHIPPING WEIGHT	435 LBS. (197 KG.)
HEIGHT	32" (813 MM)
FLOOR SPACE	27-1/4" X 18-7/8" (421 X 486 MM)
COOLING	AIR COOLED

Applications

- automotive • chemical processing • heat treatment • pharmaceuticals • metallurgy
- leak detection • vacuum melting • vacuum coating





PROVAC


SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

Stokes 148H Pumping Curves

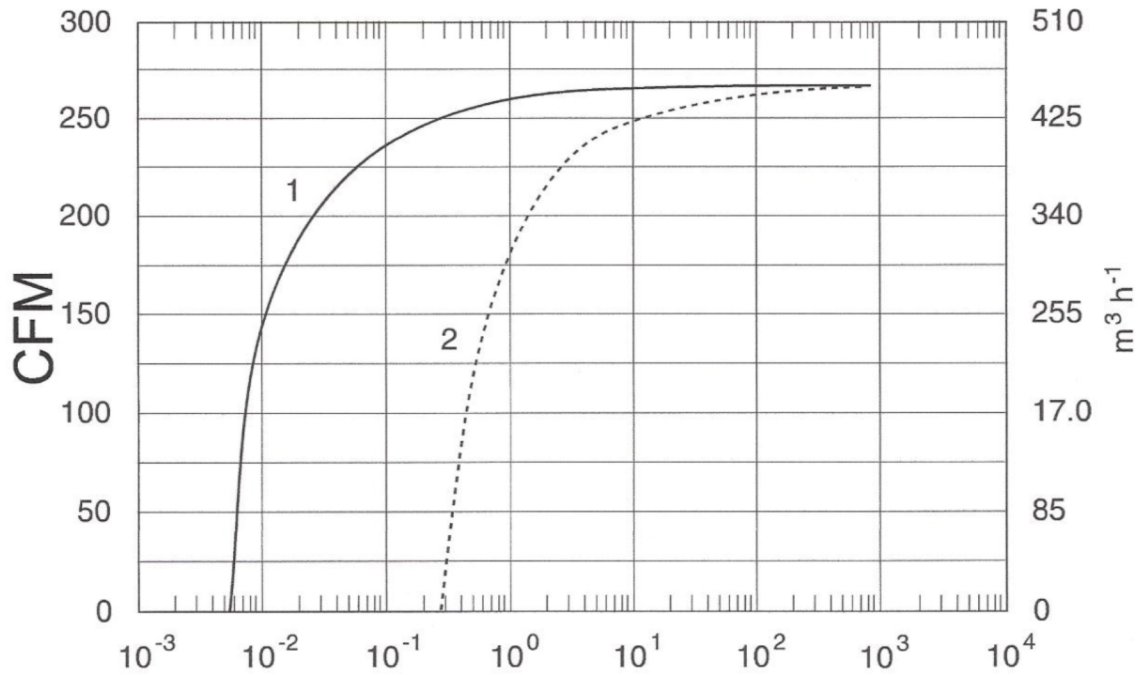

Dimensions

