



# PROVAC

## SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

## Stokes 412H-11 Technical Specifications

|                               |                                   |
|-------------------------------|-----------------------------------|
| <b>ULTIMATE VACUUM</b>        | 10 MICRONS HG. OR LESS            |
| <b>DISPLACEMENT - CU. FT.</b> | 300 CFM                           |
| <b>PUMP SPEED</b>             | 490 RPM                           |
| <b>MOTOR</b>                  | 10 HP                             |
| <b>MOTOR SPEED</b>            | 1800 RPM SYNC.                    |
| <b>STD. ELECTRICAL SPECS.</b> | 3/60/230/460                      |
| <b>PIPE CONNECTIONS</b>       |                                   |
| <b>SUCTION</b>                | 4" FLANGED                        |
| <b>DISCHARGE</b>              | 3" SCREWED                        |
| <b>WATER INLET</b>            | 1/2" NPT                          |
| <b>WATER OUTLET</b>           | 1/2" NPT                          |
| <b>OIL CAPACITY</b>           | 12 GAL. (46 LITERS)               |
| <b>NET WEIGHT</b>             | 1750 LBS. (794 KG.)               |
| <b>SHIPPING WEIGHT</b>        | 1975 LBS. (896 KG.)               |
| <b>HEIGHT</b>                 | 51-3/4" (1314 MM)                 |
| <b>FLOOR SPACE</b>            | 40-1/4" X 25-5/8" (1022 X 651 MM) |
| <b>COOLING</b>                | WATER                             |

## Applications

- vacuum heat treating • sintering • vacuum arc • induction melting
- automotive • metallurgy • vacuum coating • chemical processing
- leak detection • pharmaceuticals



# PROVAC


## SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

## Stokes 412H-11 Pumping Curves

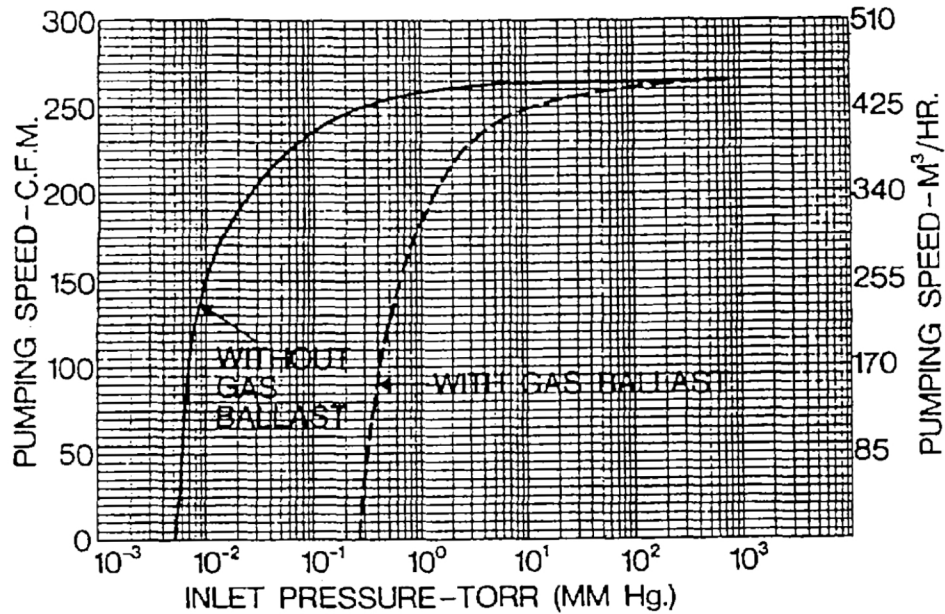

## Dimensions

