



# PROVAC

## SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM


# MD Pneumatics 540, 720

## Technical Specifications

MODEL	SERIES	DISPL. CFM	A	B	C	D Ø	D1 Ø	E	F	G	H	I
540	V	170-540	27.69	12.00	15.50	1.125	.9995	4" FLG	15.00	27.63	16.56	13.88
	H		27.69	9.00	12.25							
720	V	230-720	30.69	12.00	15.50	1.125	.9995	4" FLG	15.00	30.63	18.06	15.38
	H		30.69	9.00	12.25							

\* The shaft diameters identified as "D1" apply only to C-Face vacuum boosters.

## Dimensions

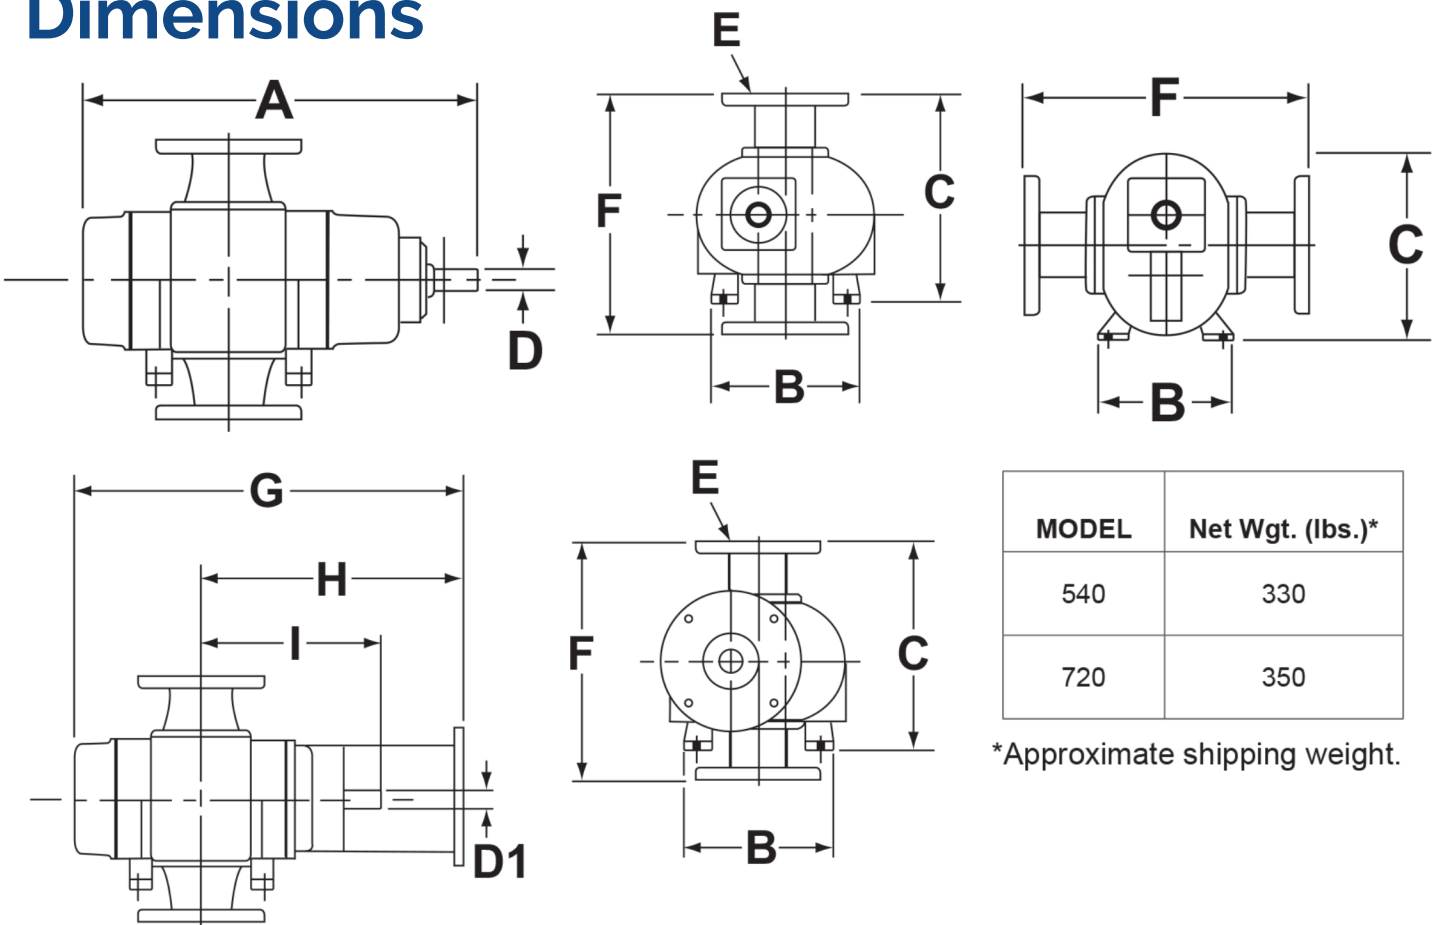



# PROVAC


## SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

## MD Pneumatics 540, 720 Pumping Curves

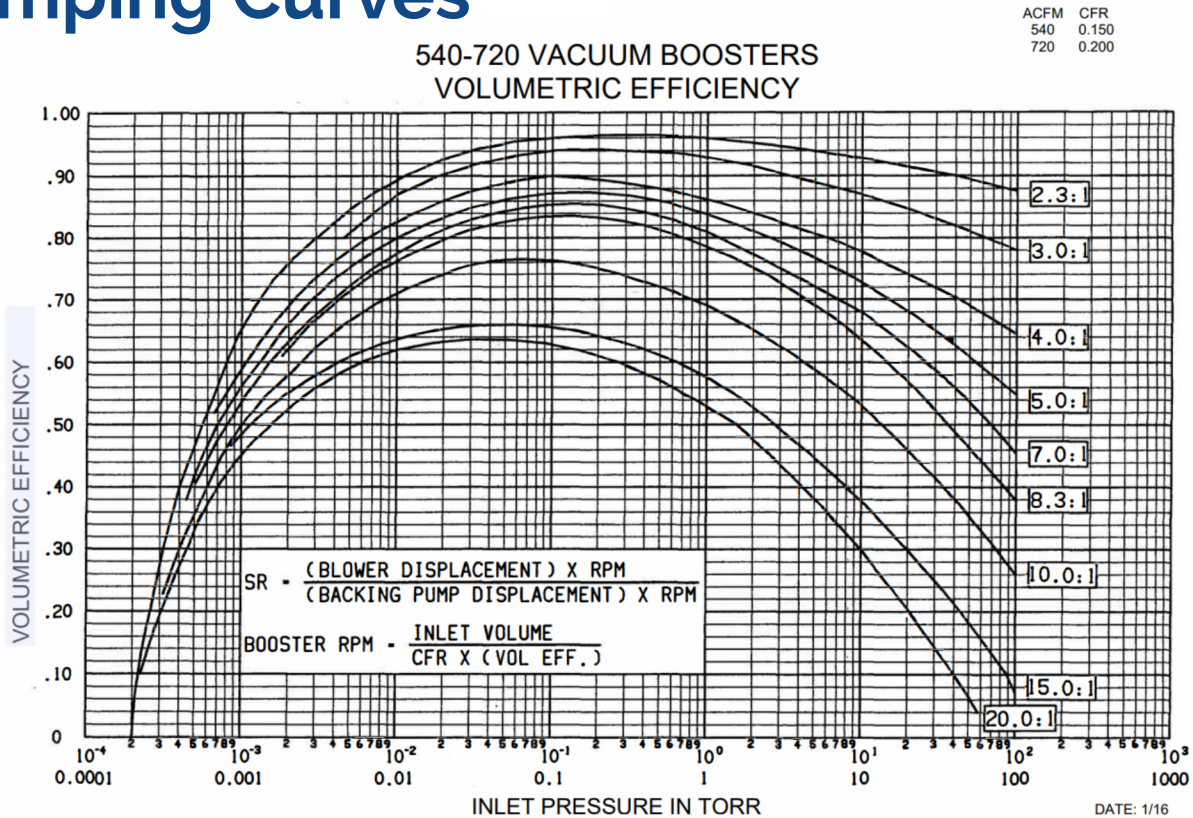

## Features & Benefits

- high-capacity gas volumes at high vacuum
- can be used in conjunction with all types of vacuum pumps
- designed to operate at 82 dB(A) or less at blank-off
- supplied with a heavy-duty drive shaft for either direct coupled or belt-driven applications

## Applications

- supercharging vacuum systems • vacuum drying • dehydration
- packaging • distillation • vacuum furnace • increasing vacuum system capacities • reducing system ultimate pressures