



PROVAC

SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

Vacuubrand ME-16CNT+EK

Technical Specifications

		ME 16C NT +EK
Number of heads / stages		8 / 1
Max. pumping speed at 50/60 Hz	m3/h	16.3 / 18.4
Max. pumping speed at 50/60 Hz	cfm	9.6 / 10.8
Ultimate vacuum (abs.)	mbar/torr	70 / 53
Ultim. vac. (abs.) with gas ballast	mbar/torr	100 / 75
Ambient temperature range (operation)	°C	10 - 40
Ambient temperature range (storage)	°C	-10 - 60
Max. back pressure (abs.)	bar	1.1
Inlet connection		small flange KF DN 25
Outlet connection		Hose nozzle DN 8-10 mm
Coolant connection		2 x hose nozzle DN 6-8 mm
Rated motor power	kW	0.44
Rated motor speed at 50/60 Hz	min-1	1500/1800
Protection class		IP 40
Dimensions (L x W x H)	mm	528 x 387 x 395
Weight	kg	29.1
Noise level at 50 Hz, typ.	dBA	52
ATEX conformity (only 230V)		II 3/- G IIC T3 X Internal Atm. only
Items supplied		Pump completely mounted, ready for use, with manual.
Accessories		PTFE tubing KF DN 25 (1000 mm: 20686033) Inlet separator KF DN 25 (20699979) Centering and sealing ring KF DN 25 C Al/FEP (20635722)



PROVAC
SALES


PHONE: 831-462-8900

FAX: 831-462-3536


WWW.PROVAC.COM

Vacuubrand ME-16CNT+EK Pumping Curves


50Hz

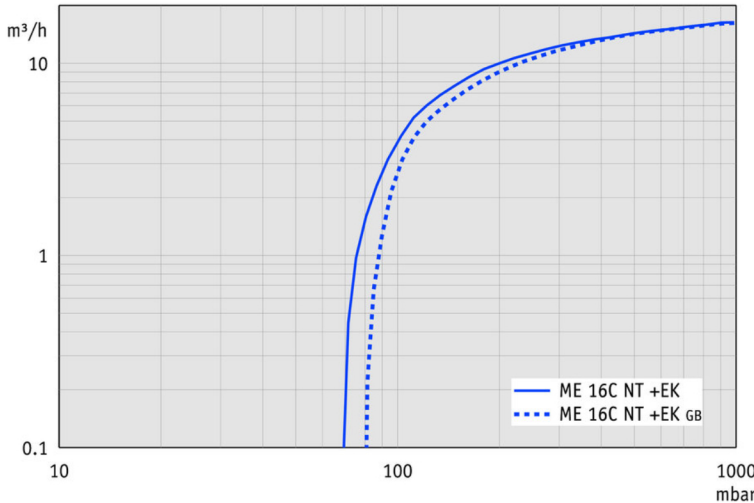

60Hz

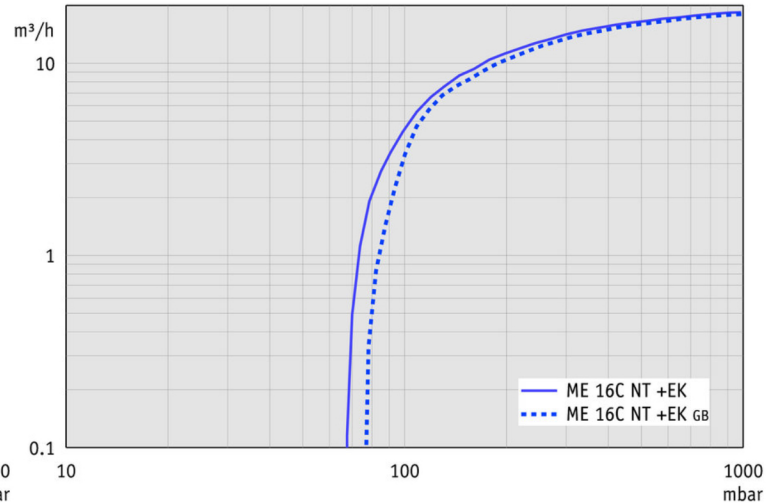


Dimensions

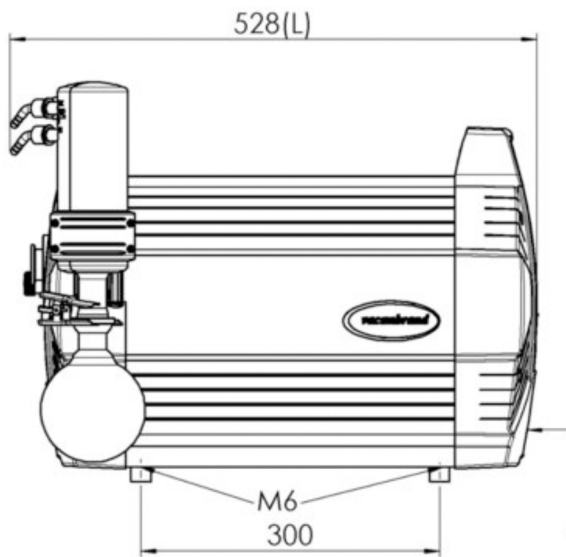

ON/OFF switch, IEC plug EN 60320

weight 29,09 kg
all dimensions (mm)

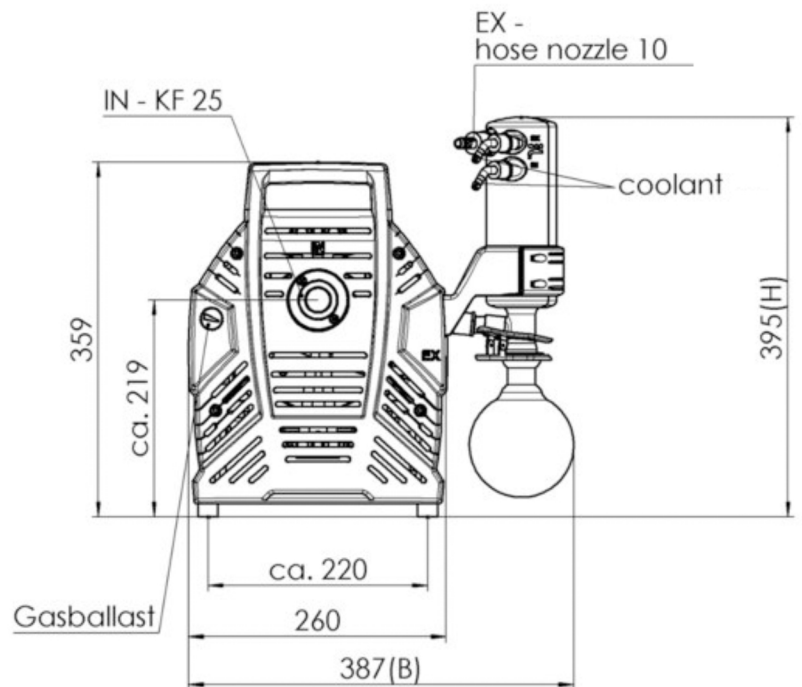

VACUUBRAND ME 16C NT EK
Version 2013/07/29



PROVAC
SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

Vacuubrand ME-16CNT+EK

Features & Benefits

- great for continuous, oil-free pumping of corrosive gases & vapors
- advantageous combination of high pumping speed & low ultimate vacuum
- outlet exhaust vapor condenser provides environmental friendly system with efficient solvent recovery
- whisper quiet operation & very low vibration
- outstanding chemical resistance & superior vapor tolerance
- eight-cylinder, one-stage, compact design

Applications

- drying chambers • filtration & solid phase extraction • local area vacuum networks for laboratories

