



**PROVAC**  
S A L E S

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

# Vacuubrand PC 3016 Vario Select

## Technical Specifications

	Unit	PC 3016 VARIO select
Vacuum controller		VACUU-SELECT
Number of heads / stages		8 / 1
Max. pumping speed	m <sup>3</sup> /h	20.0
Max. pumping speed	cfm	11.8
Ultimate vacuum (abs.)	mbar/torr	70 / 53
Ultim. vac. (abs.) with gas ballast	mbar/torr	100 / 75
Ambient temperature range (operation)	°C	10 - 40
Ambient temperature range (storage)	°C	-10 - 60
Max. back pressure (abs.)	bar	1.1
Inlet connection		Small flange KF DN 25 / hose nozzle DN 15 mm
Outlet connection		Hose nozzle DN 8-10 mm
Coolant connection		2 x hose nozzle DN 6-8 mm
Rated motor power	kW	1.0
Motor speed range	min-1	30 - 2400
Rated speed	min-1	1500/1800
Degree of protection		IP 40
Dimensions (L x W x H)	mm	616 x 387 x 450
Weight	kg	27.0
Noise level at 50 Hz, typ.	dBA	47
ATEX conformity (only 230V)		II 3/- G IIC T3 X Internal Atm. only
Items supplied		Pumping unit completely mounted, ready for use, with manual.



# PROVAC

## SALES


PHONE: 831-462-8900

FAX: 831-462-3536


WWW.PROVAC.COM

# Vacuubrand PC 3016 Vario Select

## Pumping Curves

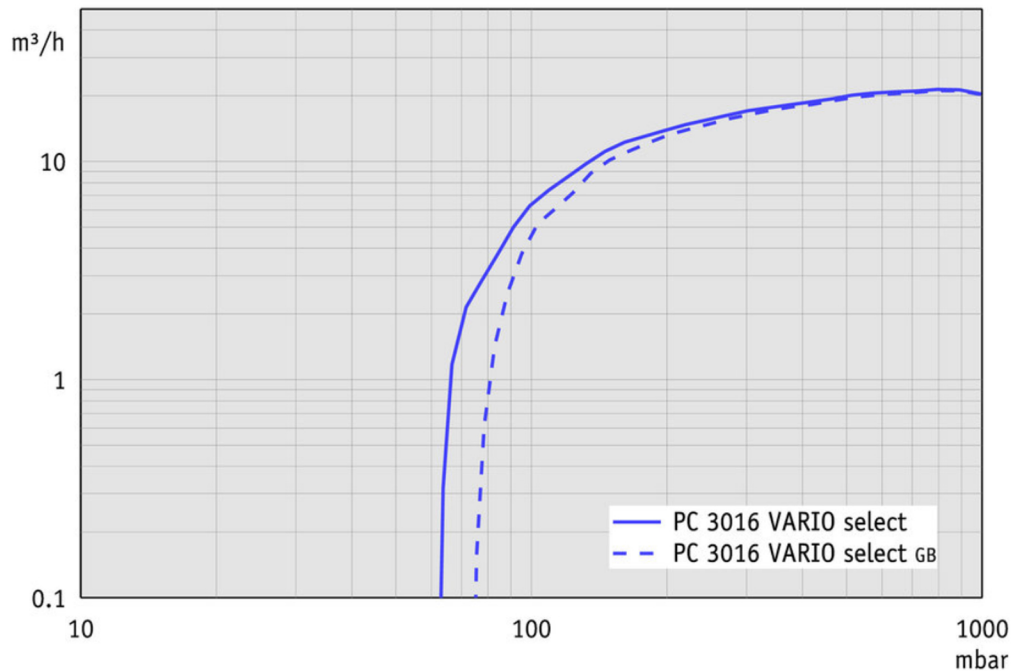

## Dimensions

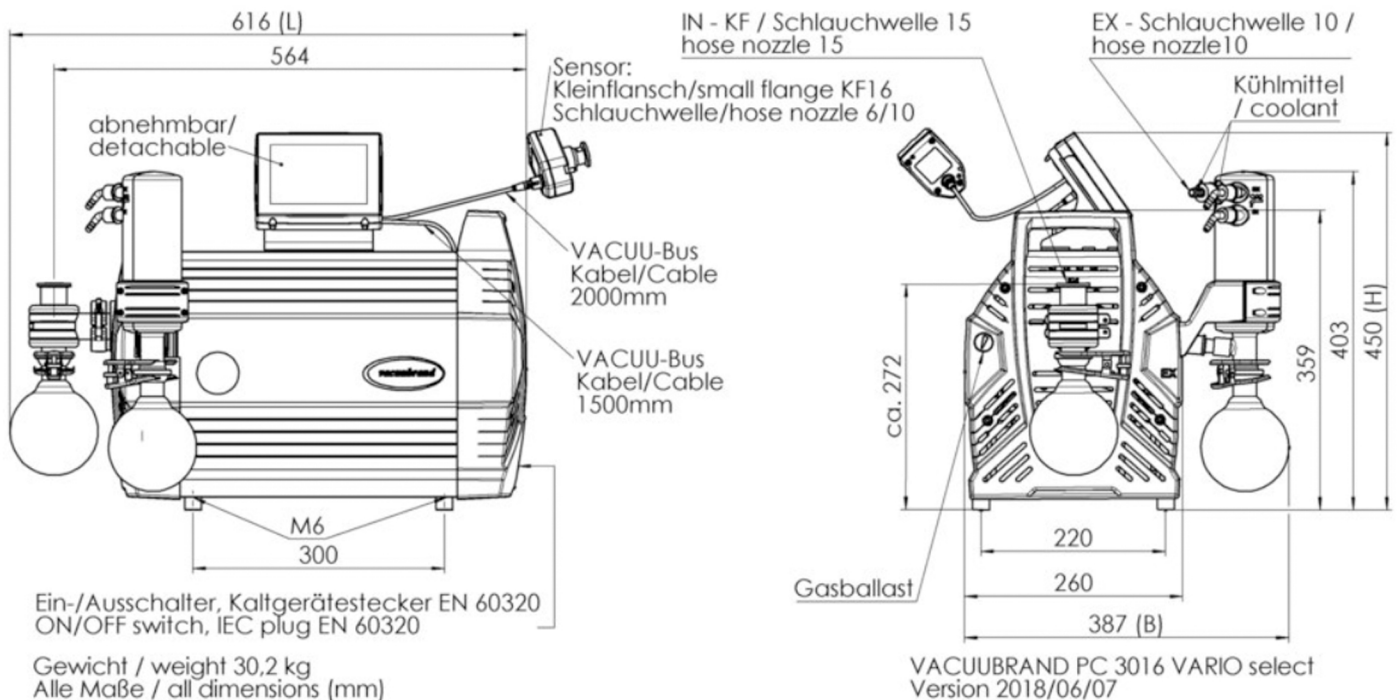



**PROVAC**  
SALES

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

# Vacuubrand PC 3016 Vario Select

## Features & Benefits

- exceptionally high pumping speed
- proven solution for evaporations with large amounts of low boiling point solvents
- controller provides easy to use application based interface
- create your own application with drag & drop editing
- automatic boiling point detection and adjustment of the vacuum for short process times

## Applications

- drying chambers • filtration & solid phase extraction • local area vacuum networks for laboratories • solvent evaporation

