



Varian TV-301AG

Technical Specifications

Input:

Voltage	100, 240 Vac
Frequency	50 to 60 Hz
Power	350 VA

Fuse	2 x T4 A (slow blow) 250 V
------	----------------------------

Output:

Voltage	75 Vac
Frequency	963 Hz
Power	150 W

Environment storage	-20 °C to +70 °C 0 – 95 %
---------------------	------------------------------


Operating	+5 - +45 °C 0 – 90 %
-----------	-------------------------

Applied norr.	EN 61010 -1 EN 55011 (Class-A) EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-4-2,3,4,5,6,11, 8
---------------	--

Weight:	1.7 Kg (3.2 lbs)
---------	------------------

Pollution Degree	2
------------------	---

Installation Category	II
-----------------------	----

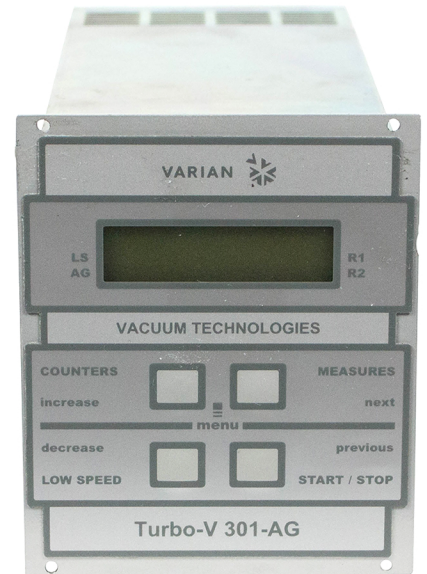



PROVAC

SALES



PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

Varian TV-301AG

Dimensions

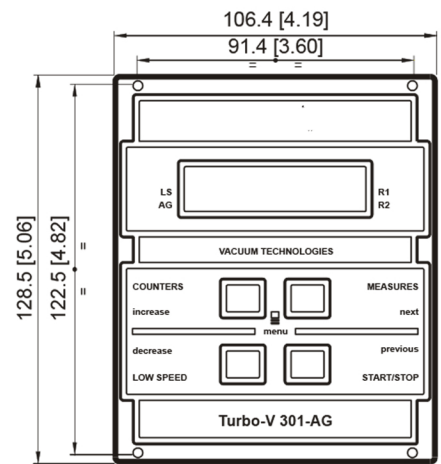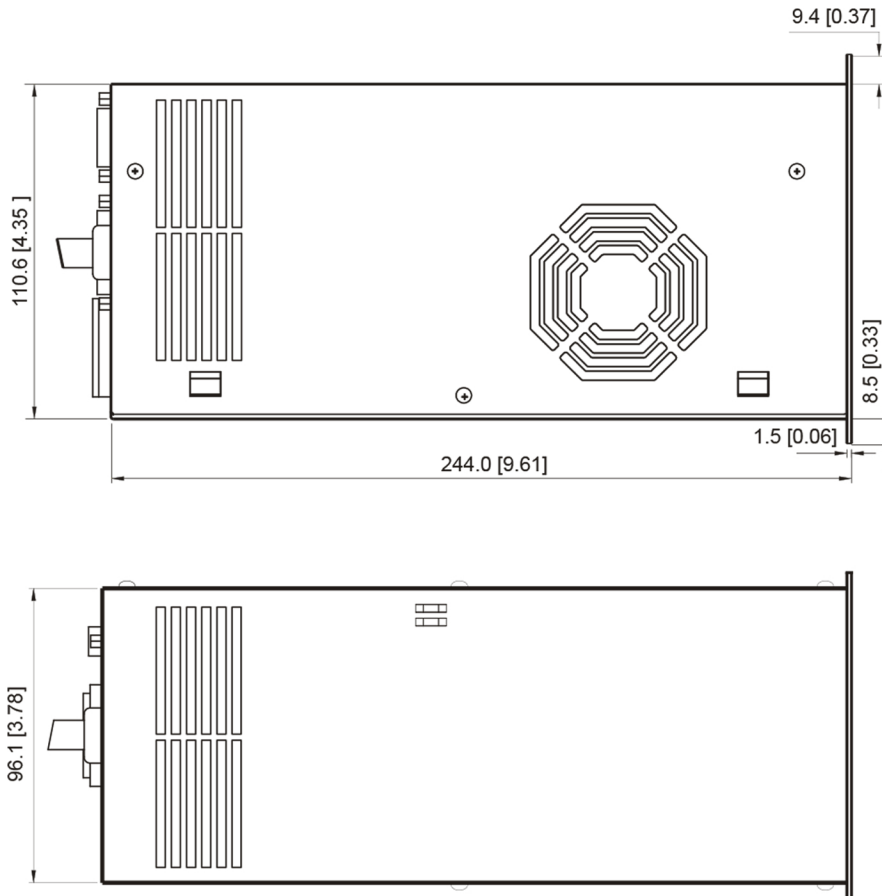

Dimensions: mm [inches]