



# PROVAC

## SALES

PHONE: 831-462-8900


FAX: 831-462-3536

WWW.PROVAC.COM

## Agilent TV-551 rack Technical Specifications



<b>Input voltages</b>	100-240 V 1 ph, 50/60 Hz
<b>Maximum input power</b>	800 VA
<b>Output frequency</b>	700 Hz
<b>Maximum output power*</b>	
V 501:	320 W
V 701:	350 W
<b>Startup power</b>	430 W
<b>Operating temperature</b>	+5 °C to +45 °C
<b>Storage temperature</b>	-20 °C to +70 °C

\* Data valid for nitrogen.

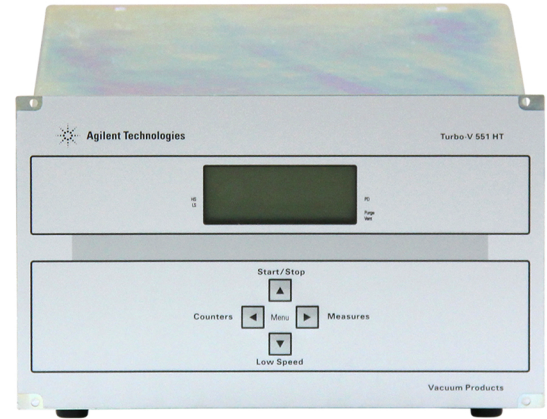

Description	Weight kg (lbs)	Part Number
<b>Controllers</b>		
Turbo-V 551 Rack controller with RS 232/485, 120-220 V	15.7 (35.0)	X3501-64001

## Dimensions

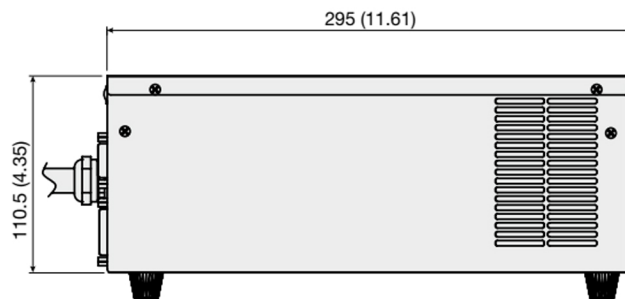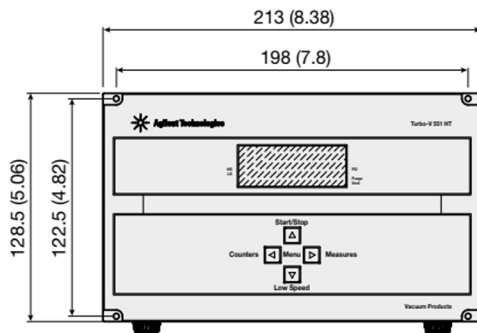

Dimensions: millimeters (inches)

## Features & Benefits

- microprocessor-controlled frequency converter
- multifunction alphanumeric display
- self-diagnostic & protection features
- remote operation is possible