



Varian TV-81AG brick

Technical Specifications

Input voltages:

Navigator controller, 24 Vdc	24 Vdc $\pm 10\%$
Navigator controller, 100/240 Vac	100 \div 240 Vac $\pm 10\%$

Input power:

Navigator controller, 24 Vdc	80W
Navigator controller, 100/240 Vac	180 VA

Input frequency:

Navigator controller, 100/240 Vac	50 to 60 Hz $\pm 5\%$
-----------------------------------	-----------------------

Fuse	2 x T4 A 250V
------	---------------

Output voltage	60 Vac
----------------	--------

Output frequency	1350 Hz
------------------	---------

Output power:

Navigator controller, 24 Vdc	50W
Navigator controller, 100/240 Vac	70 W (ramp), 50 W (Normal and Autotuning)

Operating temperature	+5 \div +45 °C 0 - 90% (Not condensing)
-----------------------	--




Storage temperature	-20 °C to +70 °C 0 - 95%
---------------------	-----------------------------

Description	Weight kg (lbs)	Part Number
Controllers		
Turbo-V 81-AG Navigator controller*, 24 Vdc	0.3 (0.66)	9698995
Turbo-V 301 Navigator controller*, 100/240 Vac	0.3 (0.66)	9698996

*Order power cable separately



Dimensions

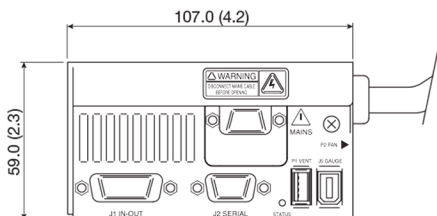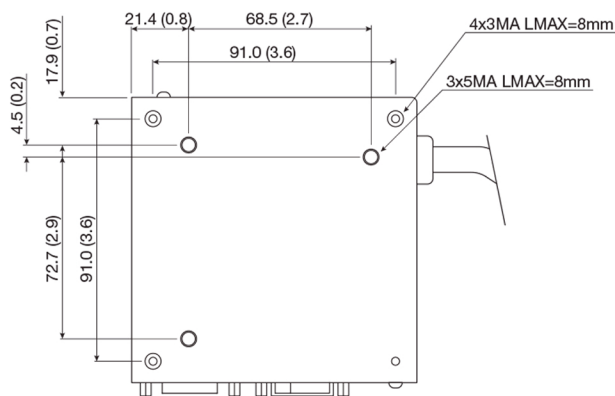

Dimensions: millimeters (inches)