



# Agilent TwisTorr 304FS OB

## Technical Specifications

**Input voltages:**

On board controller, 24 Vdc	24 Vdc $\pm$ 10%
On board controller, 120/220 Vac	100/120/220/240 Volt, 1 phase, 50/60 Hz

**Maximum input power:**

100-240 controller, 24 Vdc	200 W
100-240 controller, 120/220 Vac	300 VA

<b>Output voltage</b>	75 Vac, 3 phase
-----------------------	-----------------

<b>Output frequency</b>	963 Hz
-------------------------	--------

<b>Nominal power</b>	150 W
----------------------	-------

<b>Start-up power</b>	150 W
-----------------------	-------


<b>Operating temperature</b>	0 °C to +40 °C
------------------------------	----------------

<b>Storage temperature</b>	20 °C to +70 °C
----------------------------	-----------------




## Dimensions


120/220 V controller front panel

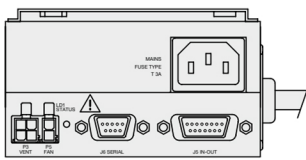

24 V controller front panel

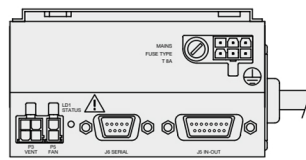

Dimensions: millimeters (inches)

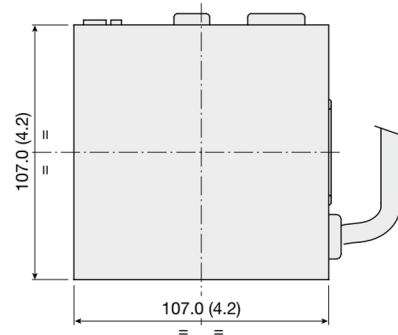

## Features & Benefits

- universal voltage
- fully controllable through PC software
- self-diagnostic & protection features
- can be mounted on bottom or side of pump