



Agilent TwisTorr 404FS

Technical Specifications

Technical Specifications		
Pumping speed	ISO 100K / ISO 100F / CFF 6"	
N ₂	380 L/s	
He	505 L/s	
H ₂	415 L/s	
Ar	340 L/s	
Max Gas Throughput (*)	Air Cooling (25°C ambient temperature)	Water Cooling (15°C water temp. / 25°C ambient temp.)
	N ₂	4.3 mbar L/s 255 SCCM
	He	6.2 mbar L/s 367 SCCM
	Ar	7.9 mbar L/s 467 SCCM
		10.4 mbar L/s 615 SCCM
		3.3 mbar L/s 195 SCCM
		1.5 mbar L/s 89 SCCM
(*) Backing pump 11.6 m ³ /h		
Compression ratio and foreline tolerance (**)		
N ₂	> 1 x 10 ¹¹	10 mbar
He	2 x 10 ⁸	10 mbar
H ₂	3 x 10 ⁶	> 4 mbar
Ar	> 1 x 10 ¹¹	8.5 mbar
(**) Foreline Tolerance defined as the pressure at which the turbopump still produce a compression of 100 and estimated in water cooling mode		
Base pressure with recomm. forepump	< 1 x 10 ⁻¹⁰ mbar (< 1 x 10 ⁻¹⁰ Torr)	
Inlet flange	ISO 100K, ISO 100F, CFF 6"	
Foreline flange	NW25 (NW16 as optional accessory)	
Rotational speed	Auto setting from 40800 RPM to 49500 RPM	
Start-up time	< 5 minutes	

Technical Specifications		
Recommended forepump	Agilent DS302 Rotary Vane Pump Agilent IDP-10 Dry Scroll Pump Agilent IDP-15 Dry Scroll Pump	
Operating position	Any	
Oper. ambient temp.	+5 °C to +35 °C	
Rel. humidity of air	0 to 90% (not condensing)	
Bakeout temp.	ISO pump: 80°C at inlet flange CFF pump: 120°C at inlet flange	
Lubricant	Permanent lubrication	
Cooling requirements		
Air cooling	Air temperature from +5°C to 35°C	
Water cooling	Water temperature from +15°C to +25°C Water flow min. 100L/h	
Noise Pressure Level (at 1m at full speed)	43dB(A)	
Storage temp.	-40 °C to +70 °C	
Max altitude	3000 m	
Weight kg (lbs)	ISO100K	22.6 kg (49.8)
	ISO100F	23.7 kg (52.3)
	CFF 6"	23.5 kg (51.8)

Conformity to Norms	
EMC (Control Units)	61326-1
Safety (CE/CSA)	61010-1
Machinery Directive	DIR 2006/42/CE
Low Voltage Directive	DIR 2014/35/EU
EMC Directive (Control Units)	DIR 2014/30/EU
ROHS	DIR 2011/65/EU



PROVAC


SALES

PHONE: 831-462-8900


FAX: 831-462-3536

WWW.PROVAC.COM

Agilent TwisTorr 404FS Pumping Curves

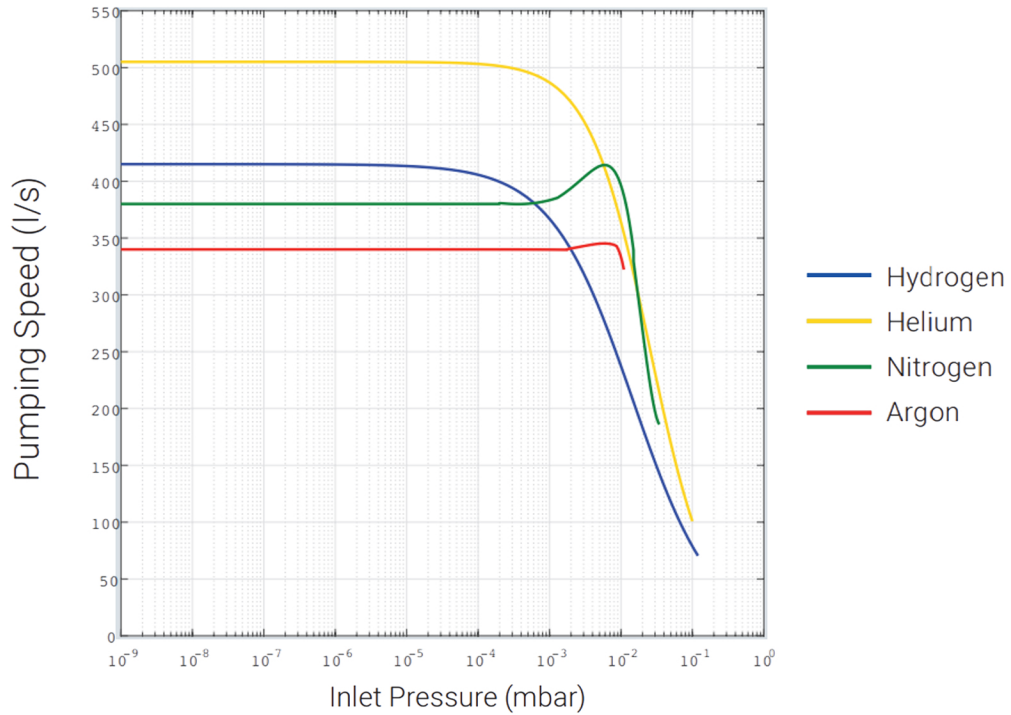

Dimensions

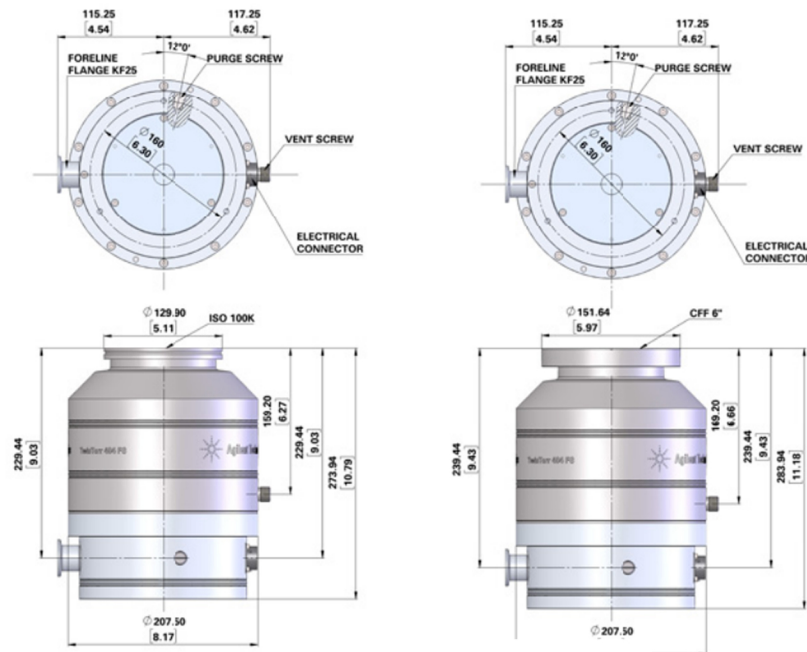



PROVAC

S A L E S

PHONE: 831-462-8900

FAX: 831-462-3536

WWW.PROVAC.COM

Agilent TwisTorr 404FS

Features & Benefits

- highest pumping speed for gases
- compact, reliable, energy efficient
- reduced cost of ownership and system down-time
- plug & play
- floating suspension
- operation in any position
- suitable for high gas load applications
- quiet and low vibration
- oil free, permanent lubrication
- ceramic ball bearings
- thermal efficiency & temperature control

Applications

- academic research • surface analysis • electron microscopes • analytical instruments • industrial • semiconductor • mass spectrometry