

QUICK START GUIDE Applicable Model: G4

Version: V1.0 Date: Oct 2018

Before installation, please read the following precautions carefully

Safety Precautions

- to prevent risks and dangers to this product, users and any other person.
 - Do not place any magnetic objects near the product. Magnetic objects such as magnets, CRT, TV, monitors or speakers may damage the device.

Do not expose to direct sunlight, water, dust and soot.

- Do not place the device next to any heating equipment.
- **Prevent** water, drinks or chemicals leaking into the device.
- This product is not intended for use by children unless they are
- Do not drop or damage the device.
- Do not disassemble, repair or modify the device.
- Do not use the device for any purpose other than those specified.
- Remove dusts or dirts regularly. While cleaning, wipe dust off with a smooth cloth or towel instead of water.

-IR LED

-7 Inch HD touch screen

IC Card Reader


-USB port

-Reset Button


-Fingerprint sensor

User Registration

1) Recommended distance

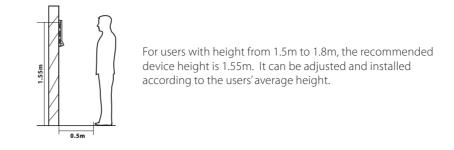


The recommended position



The registration and verification position of the device should not be changed to avoid affecting the verification accuracy. If it is necessary to move the device, then move it horizontally and keep the vertical height same.


2) The recommended and not-recommended facial expressions:





User Registration

During registration, please adjust your position and keep your face inside the green frame.



Contact your supplier in case of any problem!

Device Overview

Visible light camera

ZKTECO


Bottom

Front

Speaker

Side






Device Overview


Product PIN Diagram Tamper Switch Ethernet port Power port

Product Dimensions

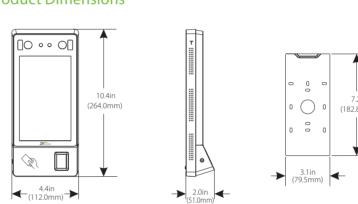

Product Installation

Mounting the device on wall

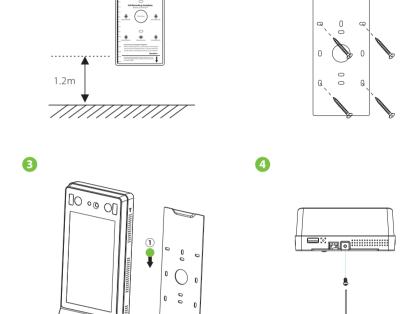

- ① Paste the mounting template sticker onto the wall, and drill holes

4 Fasten the device to the back plate with a security screw.

② Fix the back plate to the wall with wall mounting screws. 3 Attach the device to the back plate.


Ethernet & Power Connection

LAN Connection


Green

Tel: +86 755-89602345

Longgang District, Shenzhen China 518129

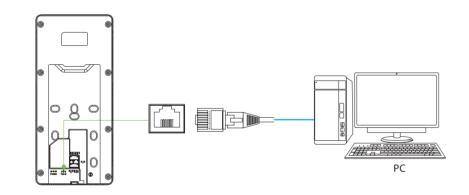

Power Connection

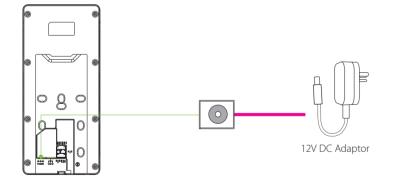


Recommended power supply

- Rating of 12V and 3A
- To share the device's power with other devices, use a power supply with higher current ratings.


Lock Relay Connection

The system supports Normally Opened Lock and Normally Closed Lock. The diagrams shown hereafter represents Normally Closed Lock.

Device not sharing power with the lock is shown below:

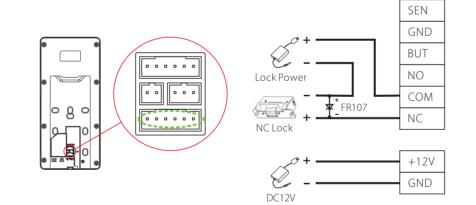

Device sharing power with the lock is shown below:

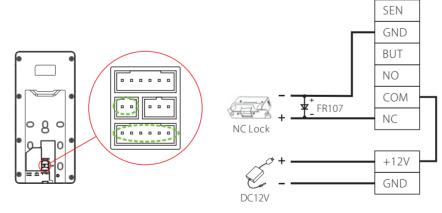


Connecting Other Devices


Button & Sensor Connection


© SEXIT

Door Sensor


Alarm Connection








Wiegand Connection

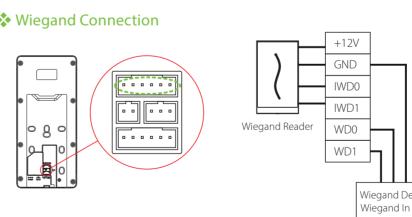

Standalone Installation

Option A



Menu Functions


Enroll New User












Go to Main Menu > Employee Management > 1 > New Employee > Enroll verification **mode**. Settings include entering Employee Name, ID, choosing User Role (Normal User is not authorized to operate the menu options of the device. Super Admin can operate all the menu options of the device), registering Fingerprint, Face Registration, Enroll Badge Number (ID and Mifare card are optional), and setting Password.

11

Menu Functions

Access Settings

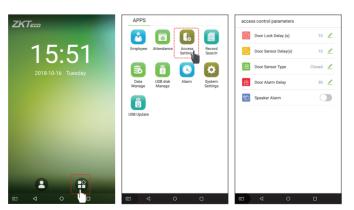

Go to Main Menu > Access Settings > Access control parameters to enter Access control parameters setting interface.

Network Settings



Go to Main Menu > System Settings > Network Settings, set the IP Address. The device will communicate with PC via the Ethernet parameters. Using Cloud Service Settings sets Server Address and Server port according to the server.

Menu Functions

Record Search



View records in the device:

Go to Main Menu > **Record Search** > **Att Log** enter **Name** or **Employee ID** (if user ID field is left blank, records of all users will be displayed) > select **Time Range** > press **OK**, the corresponding attendance logs will be displayed.

View records on computer:

Go to Main Menu> **USB disk Management** > **USB disk Download**. Insert the USB disk correctly and download the data to the USB drive, then copy this data from the USB drive to your PC. The downloaded data filename will be "Device Serial Number.dat", you can open and view it.

Menu Functions & Troubleshooting

❖ Date and Time Settings



Go to Main Menu > System Settings > Date and Time, to enter Date and Time setting interface.

Troubleshooting

- 1. Fingerprint cannot be detected or it takes too long. > Check whether the finger or fingerprint sensor is stained with sweat, water or dust. > Retry after wiping the finger and fingerprint sensor with dry paper tissue or a mildly wet cloth.
- ➤ If the fingerprint is too dry, blow the finger and retry. 2. Failed to gain access after successful verification.
- > Check with administrator whether the enrolled fingerprint has been deleted from the
- 3. Door does not open after successful verification. > Check if the lock open duration parameter is set appropriately.

12